

Article

Exergy Analysis and Evaluation of the Different Flowsheeting Configurations for CO₂ Capture Plant Using 2-Amino-2-Methyl-1-Propanol (AMP)

Ebuwa Osagie ^{1,*}, Aliyu M. Aliyu ² , Somtochukwu Godfrey Nnabuike ¹, Osaze Omoregbe ³ and Victor Etim ¹

¹ School of Water, Energy and Environment, Cranfield University, College Road, Bedford, Bedfordshire MK43 0AL, UK; G.Nnabuike@cranfield.ac.uk (S.G.N.); V.Etim@cranfield.ac.uk (V.E.)

² Gas Turbine and Transmissions Research Center, Faculty of Engineering, University of Nottingham, Nottingham NG7 2RD, UK; ali.aliyu@nottingham.ac.uk

³ Department of Chemical Engineering, University of Birmingham, Edgbaston B15 2TT, UK; OXO850@bham.ac.uk

* Correspondence: ebuwa100@yahoo.com

Received: 27 May 2019; Accepted: 19 June 2019; Published: 24 June 2019



Abstract: This paper presents steady-state simulation and exergy analysis of the 2-amino-2-methyl-1-propanol (AMP)-based post-combustion capture (PCC) plant. Exergy analysis provides the identification of the location, sources of thermodynamic inefficiencies, and magnitude in a thermal system. Furthermore, thermodynamic analysis of different configurations of the process helps to identify opportunities for reducing the steam requirements for each of the configurations. Exergy analysis performed for the AMP-based plant and the different configurations revealed that the rich split with intercooling configuration gave the highest exergy efficiency of 73.6%, while that of the intercooling and the reference AMP-based plant were 57.3% and 55.8% respectively. Thus, exergy analysis of flowsheeting configurations can lead to significant improvements in plant performance and lead to cost reduction for amine-based CO₂ capture technologies.

Keywords: 2-Amino-2-Methyl-1-Propanol; modelling and Simulation; post-combustion capture; exergy analysis; flowsheeting configurations

1. Introduction

Natural gas power plants play a vital role in meeting energy demands. Power generation from gas-fired power plants produces lots of emissions, which increases the concentration of greenhouse gases in the atmosphere. Thus, CO₂ emissions reduction is a high priority demand, and one of the solutions to this problem is carbon capture and storage (CCS). The main restriction for deploying large-scale CO₂ capture systems is that these processes reduce the plant net power output for fixed energy due to the addition of carbon capture plant, thereby increasing the net cost of capture [1]. However, the cost associated with commercial capture plants is about 80% of CCS cost [2], which poses a major setback. The reduction in the power output is as a result of the parasitic load of the capture plant, the load demand comes from the reboiler steam requirements drivers such as pumps, compressors, cooling duty needed for the amine process, etc. leading to an energy penalty. This energy penalty can be reduced in a number of ways, many of which are specific to the capture technology employed. For absorption processes, the total reboiler energy can be lowered by an improved process design of the solvent plant [3,4]. Examples of these improved process design include absorber intercooling, rich split, lean amine flash, vapor recompression, configurations and stripping with flash steam, etc.

The total energy consumption can be reduced up to 20% in pilot-scale plant studies for the different configurations compared to the conventional amine plants [5].

Several configurations for minimizing energy consumption have been suggested and studied. Leites et al. [6] modelled the intercooler and varied temperatures between 40–80 °C, the whole liquid was removed from the column at each cooling stage and pumped to 1.1 bar to overcome pressure drop. It was concluded that cooling to 40 °C was found to have the maximum effect on reboiler duty and also minimization of additional equipment. Karimi et al. [7] investigated the intercooling effect in CO₂ capture energy consumption, the optimal location for intercooling was about 1/4th to 1/5th of the height of the column from the bottom which brought about 2.84% savings in reboiler energy and it was concluded that intercooling is an option for reducing energy consumption. Aroonwilas and Veawab [8] modelled an intercooler configuration which has been integrated with an amine process to evaluate the energy savings effect as a result of enhanced working capacity. The methodology involved the withdrawal of all the liquid at 1/5th of the column height from the bottom and cooled at 45 °C by varying the lean loading between 0.12–0.25 mol CO₂/mol monoethanolamine (MEA). With the intercooling, a reduction of 10% in the solvent required led to energy savings in the stripper reboiler and also, it was concluded that lean loading above 0.18 mol CO₂/mol MEA had a minimal effect on reboiler duty. Reddy et al. [9] modelled lean amine flash configuration which generates additional steam by flashing hot lean amine leaving the stripper. Results showed 11% reduction in reboiler steam, 16% reduction in cooling water and 6% in stripper diameter. It was observed that hot lean amine temperature was lowered from 120 °C to 103 °C by the flash; this low temperature increases the energy consumption in the stripper bringing about the additional steam generation and improved working capacity. Eisenberg and Johnson [10] modelled a rich split configuration and this resulted in 7.1% savings in reboiler duty over the reference case. It was concluded that for loadings greater than 0.15 mol CO₂/mol MEA, a clear benefit was obtained. But it was later observed that increasing the packing height for a lean loading of 0.2 mol CO₂/mol MEA, for 30% of the cold solvent split, a reboiler duty of 97.8 kW was required, which is about 10.3% higher than the reference case.

Cousins et al. [11] reviewed fifteen amine process configurations (multi-component columns, inter-stage temperature control, heat-integrated stripping column, split flow process, vapor recompression, matrix stripping, heat integration, etc.). The configurations which involved both experimental and simulation-based methods were evaluated with different solvents, and different operating conditions (temperature, pressure and feed composition). It was, therefore, difficult to compare the energy savings on a fair basis. Thus, it was concluded that the configurations considered reduced the energy consumption, but increased the plant complexity. Also, configurations with less additional equipment (e.g., vapor recompression, etc.) gave higher efficiencies than those with more equipment. Ahn et al. [12] evaluated ten different configurations capture plants, this included the multiple alterations (absorber intercooling combined with condensate evaporation and lean amine flash) which were novel in the study using 30 wt% MEA to capture 90% CO₂, reboiler duty savings was maximized by simultaneous application of previous strategies. The comparison was based on total energy consumption (thermal and electrical energy used), the multiple strategies achieved a greater reduction in the energy requirement reducing steam consumption by up to 37% when compared to the simple absorber/stripper configurations. Sharma et al. [13] reviewed and assessed the advantages of fourteen different flow sheeting configurations. The comparison was based on cooling duty and equivalent work. Results showed pump-around was more beneficial than intercooling, while intercooling with rich split was found to be the most beneficial based on additional equipment, and the equivalent energy consumption was 12.9% reduction over the base case. Lars et al. [14] compared different configurations; vapor recompression with split stream gave the best reduction of 11% compared to the conventional. Liang et al. [15] studied five different flow sheeting configurations, the new innovation was the combination of split flow with overhead exchanger and improved split flow with vapor recompression. These innovations decreased equivalent work by 17.21% and 17.52% respectively. Jung et al. [16] suggested a new combination; rich vapor recompression and cold solvent

split. Results showed that reboiler heat was reduced from 3.44 MJ/kg CO₂ to 2.75 MJ/kg CO₂. All of these configurations presented above (summarised in Table 1) have achieved the aim of reducing the energy consumption for the MEA capture plant compared to the conventional flowsheet.

Table 1. Summary of representative past works on flowsheeting configurations for CO₂ capture plants.

Author(s)	Detail of Study	Solvent	Exergy Analysis
Leites et al. [6]	Evaluated intercooler at 40–80 °C, operation at 40 °C gave a maximum effect on reboiler duty using monoethanolamine (MEA)	MEA	No
Karimi et al. [7]	Evaluated intercooling effect. The optimal location for intercooling was 1/4th to 1/5th of the height of the column from the bottom, nearly 3% savings in reboiler energy.	MEA	No
Aroonwilas and Veawab [8]	Evaluated intercooling design. Removal of liquid done at 1/5th of column height from the bottom. Cooling at 45 °C resulted in 10% energy savings in the reboiler.	MEA	No
Reddy et al. [9]	Evaluated lean amine flash configuration. Hot lean amine temperature reduced from 120 to 103 °C, the low temperature, however, increases the energy consumption in the stripper.	MEA	No
Eisenberg and Johnson [10]	Evaluated rich split configuration resulting in 7.1% reboiler duty savings over reference case.	MEA	No
Cousins et al. [11]	Reviewed fifteen flowsheeting configurations, these include multi-component columns, inter-stage temperature control, heat-integrated stripping column, split flow process, vapor recompression, matrix stripping, heat integration. Results showed significant energy savings.	MEA	No
Ahn et al. [12]	Evaluated ten different configurations capture plants, this included the multiple alterations (absorber intercooling combined with condensate evaporation and lean amine flash). The multiple strategies achieved a greater reduction in the energy requirement reducing steam consumption by up to 37% when compared to the simple absorber/stripper configurations.	MEA	No
Sharma et al. [13]	Reviewed and assessed the advantages of fourteen different flow sheeting configurations. Results showed pump-around was more beneficial than intercooling.	MEA	No
Lars et al. [14]	Evaluated and compared different configurations; vapor recompression with split stream gave the best reduction of 11% compared to the conventional.	MEA	No
Liang et al. [15]	Five different flow sheeting configurations studied, the new innovation was the combination of split flow with overhead exchanger and improved split flow with vapor recompression. These innovations decreased equivalent work by 17.21% and 17.52% respectively	MEA	No
Jung et al. [16]	Evaluated rich vapor recompression and cold solvent split. Results showed that reboiler heat was reduced from 3.44 MJ/kg CO ₂ to 2.75 MJ/kg CO ₂ .	MEA	No
Geuzebroek [17], Lara et al. [18], Olaleye et al. [19]	Exergy analysis of CO ₂ capture plant	MEA	Yes
Valenti et al. [20]	Exergy analysis of CO ₂ capture plant	Ammonia	Yes

Also, rate-based modelling of CO₂ absorption in a packed column using AMP solutions for the capture plant has been carried out in the literature. Alatiqi et al. [21] used a rate-based model in simulating CO₂ absorption in AMP, MEA, and diethanolamine (DEA) solution. AMP was used to compare the absorption of CO₂ in MEA and DEA solutions. Aboudheir et al. [22] used a rate-based model in simulating the absorption of CO₂ using AMP solutions. Results were validated with experimental plant data. Gabrielsen et al. [23,24] carried out an experimental study using AMP solution and this was used as validation for the simulation of a rate-based model for CO₂ capture in a structured packed column. Afkhamipour and Mofarahi [25] compared rate-based and equilibrium-based models simulation results of a packed column using AMP solution. The rate-based models gave a better prediction of the concentration and temperature profiles than the equilibrium based. Dash et al. [26] explored the benefits of using blended solvents AMP with Piperazine (PZ). These studies presented above have all worked on models for the AMP capture process. There are limited studies on the different configurations using the AMP solvent. Kvamsdal et al. [27] presented a simulated model for the Cesar 1 (AMP + PZ) involving modifications such as intercooling and vapor recompression. The comparison was made with the MEA process using the same modifications. Results showed that the MEA process had lower energy requirements as compared to Cesar 1. Energy consumption accounts

for about 25% of total cost thus, the AMP solvent, which has more favourable operating parameters as compared to the MEA solvent as shown in studies [23,28,29] will further minimize energy requirements which will reduce cost. It is therefore important to develop these configurations and utilize the energy savings provided.

Furthermore, exergy analysis which identifies where exergy is destroyed is carried out. The destruction of exergy in a process is proportional to the entropy generation in it; which accounts for the inefficiencies due to irreversibility [30]. Exergy analysis of capture plants using MEA and ammonia solvents have been carried out by few authors [17–20] as shown above in Table 1, to investigate the effects of the associated losses. However, studies to analyse where the losses occur in the AMP-based CO₂ capture plant is lacking. This study includes (i) steady-state rate-based simulation and conventional exergy analysis of the AMP-based PCC process (ii) evaluation of exergy destruction and efficiency in the AMP capture system, (iii) exergy analysis of the different flowsheeting configurations with AMP solvent.

2. Modelling Framework

2.1. Model Description of the Capture Plant

The AMP-based process model was developed using the operating parameters in Aspen Plus® software Version (V) 8.4 (Aspen Technology, Inc., Bedford, MA, USA, released in 2013), and consists of an absorber and a stripper column, with a cross heat exchanger and a pump, all connected in a closed loop cycle as described in studies [26,31]. The validation of the capture plant model with experimental data is presented in the literature [26,28].

2.2. Exergy Analysis

Exergy is defined as the maximum theoretical work that is obtained from a system when its state is brought to the reference state [30]. Exergy analysis is a method employed in the evaluation of the use of energy [32]. Exergy gives the identification of the location, the magnitude and the causes of thermodynamic inefficiencies in a thermal system. In this section, the conventional exergy approach is used to evaluate the exergy destruction and potential for improvement of the CO₂ capture plant. The values of the exergy reference temperature and pressure, which are default parameters in Aspen Plus® V8.4 simulation tool are 298.15 K and 1.013 bar respectively, and these are used in the simulations. A theoretical process in which the thermodynamic reversibility requires that all the process driving forces such as pressure, temperature and chemical potential differences be zero at all points and times [6] leads to producing a maximum amount of high energy consumption [19]. These losses can be reduced by several methods that are based on the second law of thermodynamics such as the counteraction, quasi-static method and the driving force method [6]. In this study, the driving force method is used to reduce the exergy destruction, leading to a reduction in energy consumption in the AMP-based PCC process and using the same absorbent throughout.

The Aspen Plus® V8.4 exergy estimation property set (EXERGYMS) is used in calculating the methods for physical and chemical exergies of the material and heat flows for each component, using the individual streamflow in the AMP-based capture plant. Furthermore, in order to determine the exergy of the reactions containing electrolytes, the thermodynamic properties of the ionic species of AMP were retrieved from the Aspen Plus® databank, V8.4 (Aspen Technology, Inc., Bedford, MA, USA, released in 2013). The standard Gibbs free energy of formation of AMP in the water at infinite dilution (DGAQFM) values used in this study are based on an estimate given in studies [33,34]. Gibbs free energy data which is called from Aspen database is used in the estimation of Gibbs free energy using the empirical relation in Aspen Plus® V8.4 software. The DGAQFM values of -1.628054×10^8 J/kmol and 4.574×10^8 J/kmol were obtained for AMPH⁺ (AMP protonation) and AMPCOO[−] (AMP carbamate formation) respectively. Table 2 below shows the exergy destruction and efficiencies for the equipment in the AMP-based PCC process.

Table 2. Conventional exergy analysis of the AMP-based CO₂ capture plant.

	$E_{fuel(n)}$ (Watts)	$E_{product(n)}$ (Watts)	$E_{destruction(n)}$ (Watts)	E_n (%)
Absorber	45.19	27.02	18.17	59.79
Stripper	5085.56	4224.59	860.97	83.07
Pump	393.27	389.29	3.98	98.99
Cooler	1037.07	307.0	730.06	29.60
Heat exchanger	4174.62	1037.07	3137.55	24.84
Total	10,735.7	5984.98	4750.72	55.75

The equations below are used in evaluating the individual component and the total exergy destruction rate within a component. Thus, the exergy balance [35] for the whole system are given in Equations (1)–(3), while the exergetic performance of the AMP-based capture plant is given in Table 2. Equation 1 which is the fuel exergy of each component is as follows:

$$E_{fuel(total)} = E_{product(total)} + E_{Destruction(total)} + E_{Losses(total)} \quad (1)$$

While for the exergy efficiency of each component (n) which accounts for the thermodynamic losses is given as shown in Equation (2):

$$E_{(n)} = E_{product(n)} / E_{fuel(n)} \quad (2)$$

And the exergy destruction ratio of the nth component is presented in Equation (3):

$$X_{d(n)} = E_{Destruction(n)} / E_{fuel(total)} \quad (3)$$

Table 2, shows the exergy destruction and efficiency for the sub components in the AMP-based capture plant. As observed, the absorber and stripper components had exergy efficiency of 59.8 and 88.5%, respectively, while the heat exchanger gave the lowest exergy efficiency of 25%, these values are close in range with the literature [19].

3. Flowsheeting Configurations

The amine flow sheeting configurations are set up for the capture plant. The reference plant is the standard AMP-based capture plant configuration, as described in Section 2.

3.1. Intercooling Configuration

Absorption of CO₂ from the gas streams is mostly done between temperature 40–60 °C, this is because rates of CO₂ absorption for a 30 wt% amine solvent are highest in this temperature range (11). In order to control the temperature in the absorber so as to reach a higher rich CO₂ loading (high absorption capacity), inter stage cooling as shown in Figure 1 is required.

In this configuration, the exothermic nature of CO₂ absorption in amine present in the absorber leads to a temperature bulge and this impacts absorption negatively [36]. At the location of the T-bulge, the solvent is being extracted, cooled to 40 °C and returned to the absorber which leads to the enhancement of absorption driving force [11]. A lower temperature leads to a reduction in the absorption rates such as chemical kinetics, diffusivities, etc., while an increase in temperature favours the absorption capacity. These two operations compete with each other in the absorber. The temperature in the absorber can be controlled by adjusting the flue gas, the lean solvent temperature and flowrate coming into the absorber. Thus, this balances the temperature at either end of the absorber. With this modification, a reduction in solvent circulation rate which leads to higher absorption capacity is achieved. Hence, this process configuration enables the control of temperature within the absorber and

is capable of enhancing CO₂ recovery [11], which is very effective in reducing the energy requirement of a CO₂ capture plant [7]. Results obtained are given in Table 3.

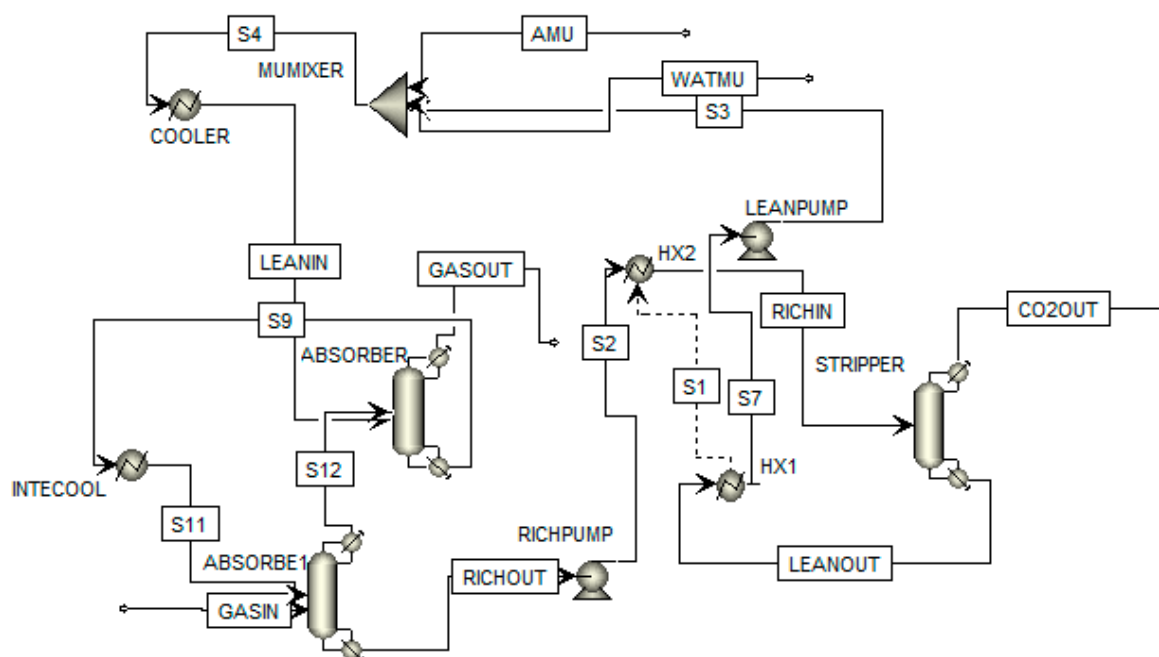


Figure 1. Intercooling Configuration [11].

Table 3. Results for intercooling configuration.

	Rich Loading (mol/mol)	Absorber (ABS) Capacity (mol/mol)	Reboiler Duty (kW)	ABS Temp (°C)
Reference	0.388	0.123	4.77	63.07
AMP-cooled	0.503	0.173	3.60	47.11

As shown in Table 3, lower reboiler duty and higher absorption capacity are achieved for AMP when compared with the reference; this is one of the main benefits of intercooling. This occurs due to the higher rich loading obtained from the intercooled model which leads to a lower circulation rate. Also, literature studies [37] has proven AMP to have a higher loading capacity and lower heat of reaction due to the formation of bicarbonates. The reference plant has a higher temperature bulge (63 °C) in the absorber compared to AMP-cooled (47 °C), thus having a higher heat of reaction which leads to an increment in the reboiler duty. With this intercooling, a gain of 24.5% savings in reboiler duty for AMP-cooled over the reference is achieved.

3.2. Lean Amine Flash Configuration

As shown in Figure 2, the stripper design comprises additional equipment such as a pump, compressor, and the flash drum. Additional steam is generated by flashing hot lean amine exiting the stripper close to ambient pressure, followed by the compressing of the gas stream up to the stripper pressure and re-introducing it into the stripper column [38,39]. In the flash drum present, more CO₂ is desorbed by reducing the pressure in the flash drum and lean loading in the stripper out is further reduced. Thus, additional steam is generated for the AMP-based process since the gas stream is compressed at a higher pressure. Results for the lean amine flash configuration is given in Table 4.

steam generated in the reboiler, this is because the generation of steam within the column reduces the operating CO_2 partial pressure below that of the partial pressure in the column, enabling stripping to occur. (iii) Providing heat to reverse the absorption reaction in the absorber, which is in theory, equal to that released due to the exothermic reactions and (iv) providing heat to liberate dissolved CO_2 out of the solvent. Depending on the function which is most dominant under a given set of conditions, the reboiler duty will adjust accordingly to maintain the required stripping rate. The study also revealed that the possibility of obtaining a higher CO_2 flashing will allow the further release of CO_2 in the upper stages of the stripping column and give additional benefits [11].

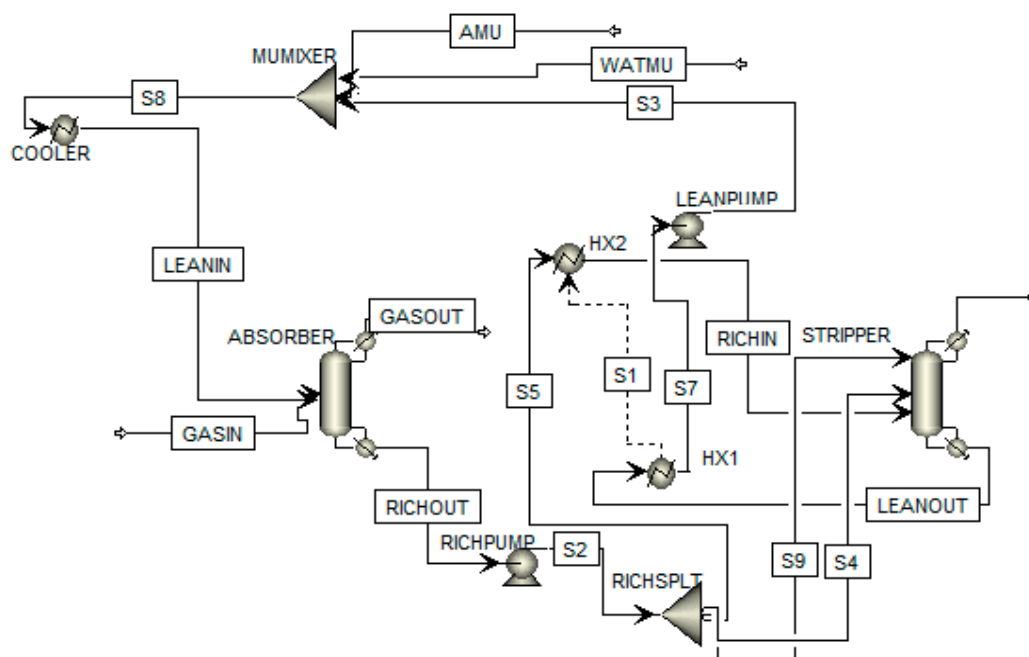


Figure 3. Rich split modification [11].

It should be noted however that the efficiency of the lean/rich heat exchanger will have a significant effect on the results of this process modification. The objective of the lean/rich exchanger is energy conservation. The energy available from the lean amine stream is transferred to the rich amine prior to introducing the rich amine to the stripper. This energy transfer results in a decreased energy requirement for the stripper as observed in the results presented in Table 5.

Table 5. Results for rich split configuration.

	Split-Fraction (%)	Reboiler Duty (kW)	Cross Heat Exchanger Flowrate (kg/s)	Cross Heat Exchanger Duty (kW)
Reference	0	4.77	0.10089	17.46
AMP-rich Split	30	4.7	0.09989	17.30

During the operation considered here, the solvent split fraction was found to have a significant effect on the temperature approach achieved through the lean/rich heat exchanger. As more of the cold rich solvent is split to the top of the column, the lower flowrate through the heat exchanger means that the hot rich solvent can be raised to higher temperatures. The vapor fraction in the hot rich solvent will increase, providing more steam for pre-stripping, which reduces the reboiler duty, as shown in Table 4. Thus, the reboiler duty slightly reduces from 4.77 kW to 4.73 kW for rich split configuration as compared to the reference plant.

3.4. Vapor Recompression

This process modification as shown in Figure 4 involves the extraction of steam from a part of the stripping column, which is recompressed and re-introduced into the regenerator. This operation turns mechanical energy into thermal energy to provide more stripping steam [11]. Hence, this configuration works by providing an additional source of stripping steam for the column, as this lowers the thermal input required by the stripper. The vapor is compressed to five times the operating pressure of the stripping column, before being separated with the condensate recycled back to the stripper [11]. Although this process configuration reduces the reboiler duty, it leads to a corresponding increase in the power requirement due to the addition of the compression stages [11]. Thus, in this study, one expansion stage is used to make comparison easier.

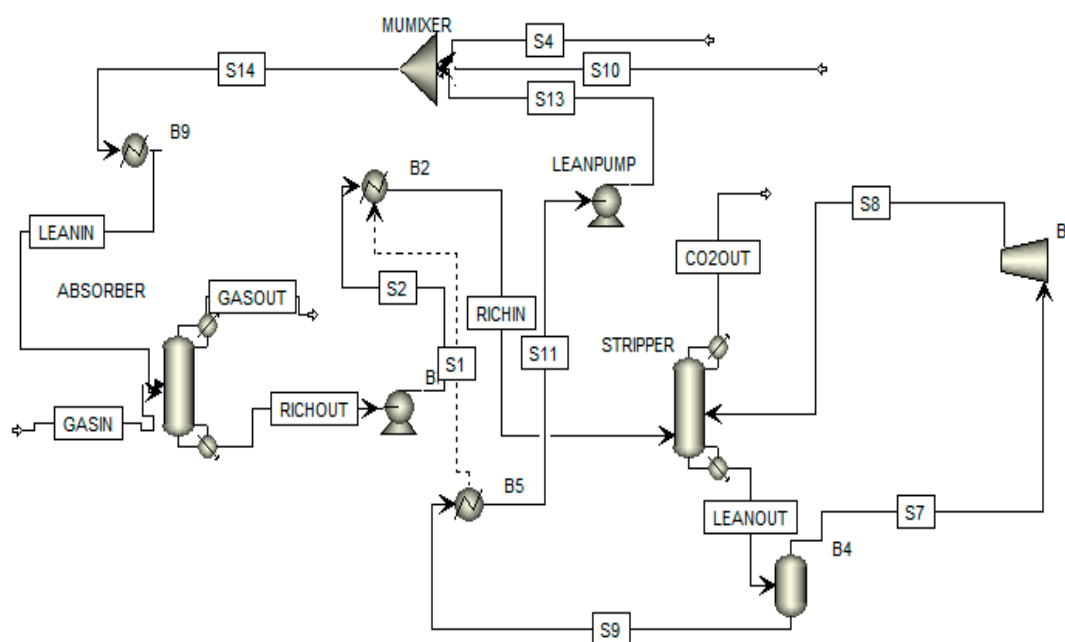


Figure 4. Vapor recompression modification [11].

As shown in Table 6, 59.5% savings in reboiler duty is obtained for the AMP-based plant compared to the reference case. For the vapor recompression configuration, additional stripping steam is generated, this is as a result of the higher pressure which leads to a higher temperature and enables the lean solvent flash pressure drop to increase. Also observed is the reduced heat exchanger duty obtained for the vapor recompression flowsheet, this is because lean solvent temperature increases which lead to a higher stripping efficiency.

Table 6. Results for vapor recompression.

	Reboiler Duty (kW)	Cross-Heat Exchanger Duty (kW)
Reference plant	4.77	17.46
AMP Vap-Recompression	1.93	5.69

3.5. Rich Split with Intercooling

As mentioned earlier, splitting the rich stream by 20–30% as recommended in the literature [11], can increase the absorption capacity which brings about the energy savings for the stripper design. In addition, the rich split modification requires minimal additional equipment. Furthermore, cooling at different stages in the absorber column has a significant effect in reducing the reboiler duty. Thus, with multiple alterations, reboiler duty can be further reduced [40]. Also, since the highest and lowest

savings in the reboiler duty for intercooling and rich split configurations respectively, were obtained in this study, a combination of rich split and intercooling configurations will be necessary, to observe if any benefit can be obtained, and to enable further reduction in reboiler duty as shown in Figure 5.

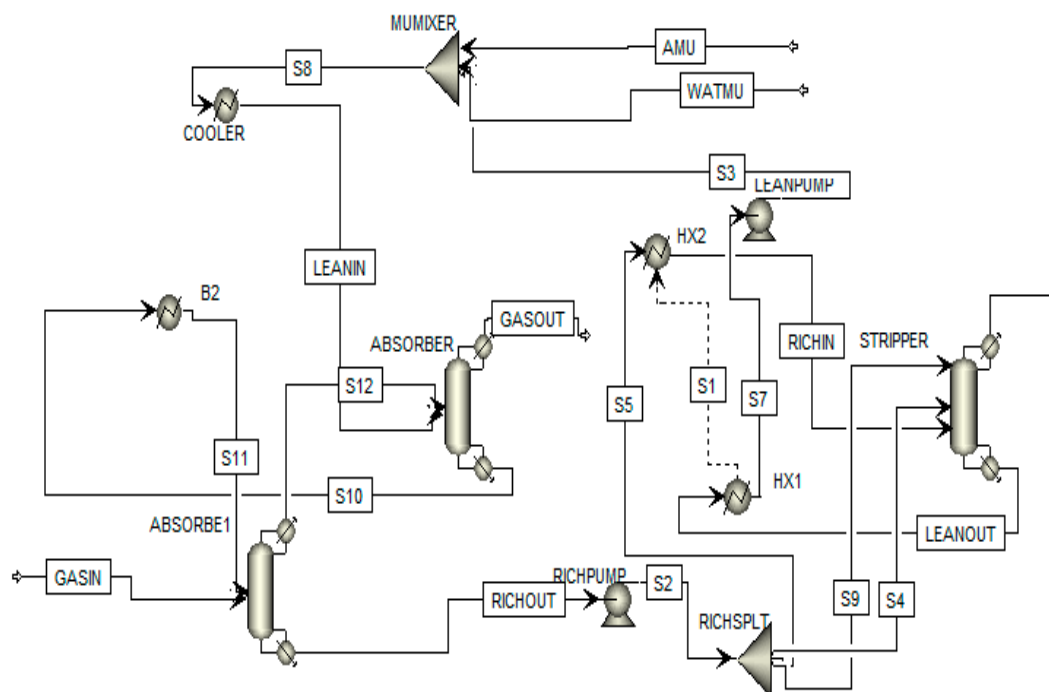


Figure 5. Rich split with intercooling configuration.

Simulation results are reported in Table 7 below, the multiple measures taken (rich split with intercooling) for the AMP-based process led to the energy savings of about 88.5% higher than the reference case. Thus, comparing the five different flowsheeting configurations, the rich split with intercooling configuration gave the best performance. This is in accordance with the literature [13].

Table 7. Results for rich split and intercooling


	Reboiler Duty (kW)	Cross-Heat Exchanger Flowrate (kg/s)	Cross-Heat Exchanger Duty (W)
Reference	4.77	0.10089	17.46
AMP Rich split	0.55	2.55×10^{-4}	5.30

4. Exergy Analysis for the Flowsheeting Configurations

Table 8 below shows the total exergy analysis and performance evaluation of the different flowsheeting configurations. Results show that the rich split with intercooling and vapor recompressions configurations gave the best and worst exergetic performances respectively as compared to the other configurations. Also, as compared to the reference plant which is presented in Table 2, two configurations (rich split with intercooling and intercooling alone) gave higher exergy efficiency than the reference case. While lean amine flash, rich split alone and vapor recompressions gave lower exergy efficiencies as compared to the reference plant. A reason for the low efficiencies could be that, the more efficient the configurations (based on the reboiler duty), the less outlet for exergy losses. Furthermore, Figure 6, shows the efficiency percentage and the amount of exergy for the different configurations. As clearly seen, the rich split with intercooling configuration, gave the highest exergy efficiency and the lowest exergy destruction.

Table 8. Summary of Exergy Analysis for the Different Configurations.

Configurations	E_{fuel} (Watts)	E_{product} (Watts)	$E_{\text{destruction}}$ (Watts)	E_{eff} (%)
Intercooling	5261.33	3015.67	2245.66	57.32
Rich split	10,515.44	5851.37	4664.07	55.65
Rich slit + intercooling	780.11	573.87	206.23	73.56
Lean amine flash	6360.78	3189.95	3170.83	50.15
Vapor recompression	14,767.7	4197.07	10,570.65	28.42

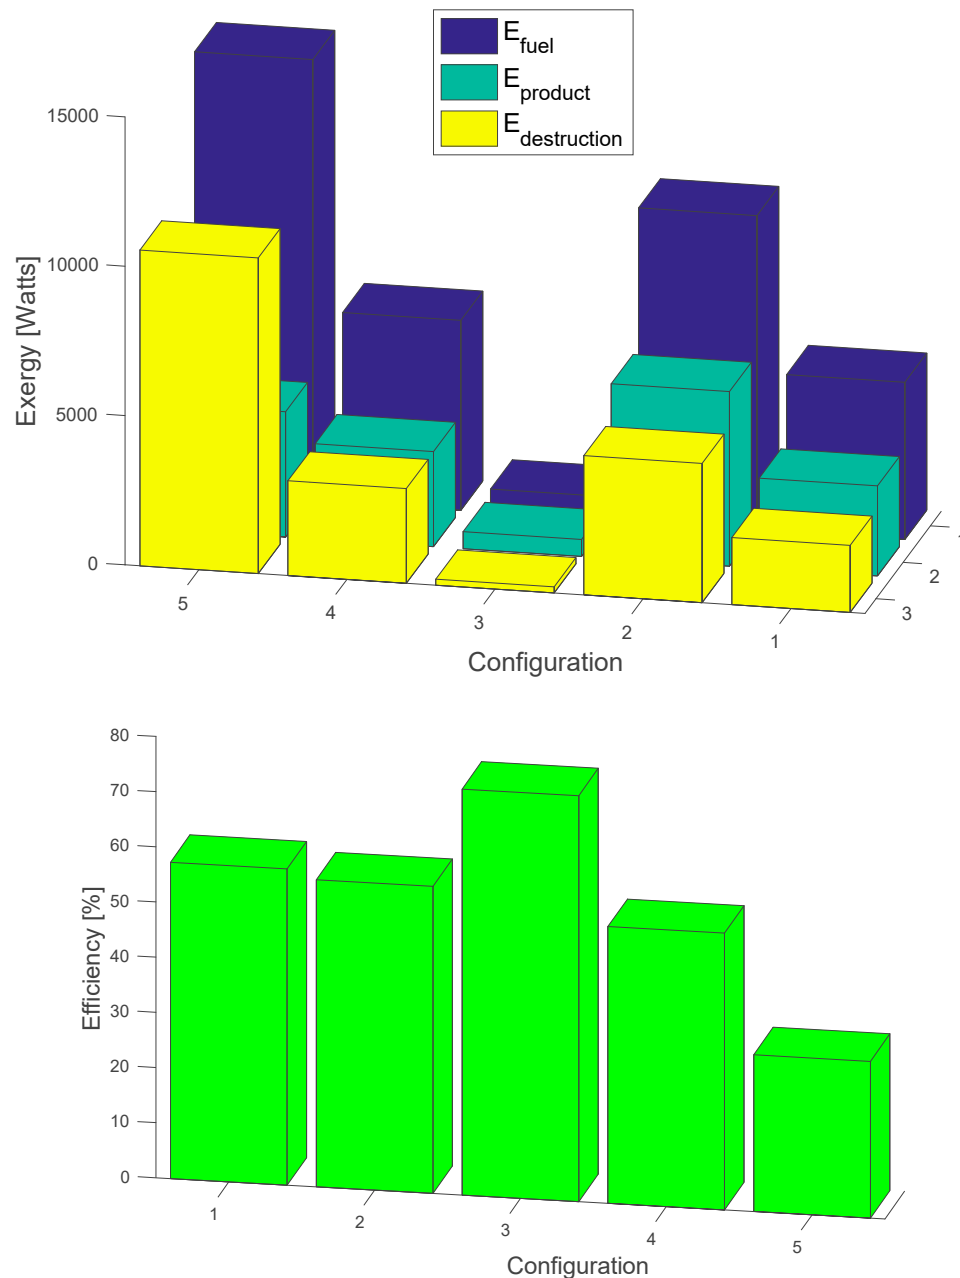**Figure 6.** Summary Results of Exergy Analysis for the Different Configurations. For the horizontal “Configuration” axis, 1. Intercooling 2. Rich Split 3. Rich Split with Intercooling 4. Lean Amine Flash 5. Vapor Recompression.

5. Conclusions

In this study, the exergy analysis of the AMP PCC process and its flowsheeting configurations have been evaluated. The operating parameters for the rate-based AMP model present in Aspen Plus[®] software were used to describe the PCC process. The conventional exergy analysis performed provides an evaluation of energy consumption the CO₂ capture plant from the thermodynamic point of view, and also evaluates the reduction of the exergy destruction. The pump and stripper subsystems of the AMP-based capture plant had the highest exergy destruction, and the cross-heat exchanger subsystem gave the lowest exergy destruction performance.

Several configurations were proposed in the literature to reduce energy requirements in the amine-based CO₂ capture plant, these configurations at atmospheric pressure have been simulated in Aspen Plus[®] software. Flowsheeting configurations considered in this study include intercooling, lean-amine flash, rich split, vapor recompression and the rich split with intercooling configurations. Results show that the combination configuration (rich split with intercooling) had the highest savings (88.5%) in reboiler duty as compared to the reference AMP-based plant, and the other flowsheeting configurations. Furthermore, exergy analysis performed showed that the rich split with intercooling configuration had the highest exergy efficiency of 74%, followed by the intercooling configuration with 57% exergy efficiency, and that of the reference AMP plant was obtained to be 56%. The other configurations considered in the study had exergy efficiencies lower than that of the reference plant. This study has shown that some of the flowsheeting configurations can reduce the heat required for regeneration, and others can both reduce reboiler duty and at the same time increase the exergy efficiency. Thus, the flowsheeting configurations have significant improvements in the plant performance and may lead to cost reduction for the amine-based CO₂ capture technology. Although the additional equipment for each configuration may incur extra cost, economic analysis is therefore required to ascertain if any cost benefits can be obtained with flowsheeting configurations for the AMP-based PCC process.

Author Contributions: E.O.—methodology and writing original draft; A.M.A.—supervision, review and editing; S.G.N.—writing, review and editing; O.O.—review and editing; V.E.—review and editing.

Funding: This research received no external funding.

Conflicts of Interest: The authors declare no conflict of interest.

References

1. Chalmers, H.; Gibbins, J. Initial evaluation of the impact of post-combustion capture of carbon dioxide on supercritical pulverised coal power plant part load performance. *Fuel* **2007**, *86*, 2109–2123. [\[CrossRef\]](#)
2. Rubin, E.S.; Chen, C.; Rao, A.B. Cost and performance of fossil fuel power plants with CO₂ capture and storage. *Energy Policy* **2007**, *35*, 4444–4454. [\[CrossRef\]](#)
3. Davison, J. Performance and costs of power plants with capture and storage of CO₂. *Energy* **2007**, *32*, 1163–1176. [\[CrossRef\]](#)
4. Jassim, M.S.; Rochelle, G.T. Innovative absorber/stripper configurations for CO₂ capture by aqueous monoethanolamine. *Ind. Eng. Chem. Res.* **2006**, *45*, 2465–2472. [\[CrossRef\]](#)
5. Reddy, S.; Scherffius, J.; Freguia, S.; Roberts, C. Fluor's Econamine FG Plus SM Technology. In Proceedings of the Second Annual Conference on Carbon Sequestration, Alexandria, VA, USA, 6 May 2003.
6. Leites, I.L.; Sama, D.A.; Lior, N. The theory and practice of energy saving in the chemical industry: Some methods for reducing thermodynamic irreversibility in chemical technology processes. *Energy* **2003**, *28*, 55–97. [\[CrossRef\]](#)
7. Karimi, M.; Hillestad, M.; Svendsen, H.F. Investigation of intercooling effect in CO₂ capture energy consumption. *Energy Procedia* **2011**, *4*, 1601–1607. [\[CrossRef\]](#)
8. Aroonwilas, A.; Veawab, A. Integration of CO₂ capture unit using single-and blended-amines into supercritical coal-fired power plants: Implications for emission and energy management. *Int. J. Greenh. Gas Control.* **2007**, *1*, 143–150. [\[CrossRef\]](#)

9. Reddy, S.; Scherffius, J.; Gilmartin, J.; Freguia, S. Improved split flow apparatus. Patent No. WO 2004005818 A2, 2004.
10. Eisenberg, B.; Johnson, R.R. Amine Regeneration Process. U.S. Patent 4,152,217A1, 1 May 1979.
11. Cousins, A.; Wardhaugh, L.T.; Feron, P.H. Preliminary analysis of process flow sheet modifications for energy efficient CO₂ capture from flue gases using chemical absorption. *Chem. Eng. Res. Des.* **2011**, *89*, 1237–1251. [[CrossRef](#)]
12. Ahn, H.; Luberti, M.; Liu, Z.; Brandani, S. Process configuration studies of the amine capture process for coal-fired power plants. *Int. J. Greenh. Gas Control.* **2013**, *16*, 29–40. [[CrossRef](#)]
13. Sharma, M.; Quadri, A.; Khalilpouri, R. Modeling and analysis of process configurations for solvent-based post-combustion carbon capture. *Asia-Pac. J. Chem. Eng.* **2015**, *10*, 764–780. [[CrossRef](#)]
14. Lars, E.O.; Terje, B.; Christian, B.; Sven, K.B.; Marius, F. Optimization of configurations for amine based CO₂ absorption using Aspen HYSYS. 7th Trondheim CCS Conference, TCCS-7. *Energy Procedia* **2014**, *51*, 224–233.
15. Liang, Z.; Gao, H.; Rongwong, W.; Na, Y. Comparative studies of stripper overhead vapor integration-based configurations for post-combustion CO₂ capture. *Int. J. Greenh. Gas Control.* **2015**, *34*, 75–84. [[CrossRef](#)]
16. Jaeheum, J.; Yeong, S.J.; Ung, L.; Youngsub, L.; Chonghun, H. New Configuration of the CO₂ Capture Process Using Aqueous Monoethanolamine for Coal-Fired Power Plants. *Ind. Eng. Chem. Res.* **2015**, *54*, 3865–3878.
17. Gabrielsen, F.H. Exergy analysis of alkanolamine-based CO₂ removal unit with Aspen Plus. *Energy* **2004**, *29*, 1241–1248. [[CrossRef](#)]
18. Lara, Y.; Martinez, A.; Lisbona, P.; Bolea, I.; Gonzalez, A.; Romeo, L.M. Using the second law of thermodynamic to improve CO₂ capture systems. *Energy Procedia* **2011**, *4*, 1043–1050. [[CrossRef](#)]
19. Olaleye, A.K.; Wang, M.; Kelsall, G. Steady state simulation and exergy analysis of supercritical coal-fired power plant with CO₂ capture. *Fuel* **2015**, *151*, 57–72. [[CrossRef](#)]
20. Valenti, G.; Bonalumi, D.; Macchi, E. Energy and exergy analyses for the carbon capture with the Chilled Ammonia Process (CAP). *Energy Procedia* **2009**, *1*, 1059–1066. [[CrossRef](#)]
21. Alatiqi, I.; Sabri, M.F.; Bouhamra, W.; Alper, E. Steady-state rate based modelling for CO₂ amine absorption—Desorption systems. *Gas Sep. Purif.* **1994**, *8*, 3–11. [[CrossRef](#)]
22. Aboudheir, A.; Tontiwachwuthikul, P.; Idem, R. Rigorous model for predicting the behavior of CO₂ absorption into AMP in packed-bed absorption columns. *Ind. Eng. Chem. Res.* **2006**, *45*, 2553–2557. [[CrossRef](#)]
23. Gabrielsen, J.; Svendsen, H.F.; Michelsen, M.L.; Stenby, E.H.; Kontogeorgis, G.M. Experimental validation of a rate-based model for CO₂ capture using an AMP solution. *Chem. Eng. Sci.* **2007**, *62*, 2397–2413. [[CrossRef](#)]
24. Gabrielsen, J.; Michelsen, M.L.; Stenby, E.H.; Kontogeorgis, G.M. Modeling of CO₂ absorber using and AMP solution. *AIChE J.* **2006**, *52*, 3443–3451. [[CrossRef](#)]
25. Afkhamipour, M.; Mofarahi, M. Comparison of rate-based and equilibrium-stage models of a packed column for post-combustion CO₂ capture using 2-amino-2-methyl-1-propanol (AMP) solution. *Int. J. Greenh. Gas Control* **2013**, *15*, 186–199. [[CrossRef](#)]
26. Dash, S.K.; Samanta, A.N.; Bandyopadhyay, S.S. Simulation and parametric study of post-combustion CO₂ capture process using (AMP + PZ) blended solvent. *Int. J. Greenh. Gas Control* **2014**, *21*, 130–139. [[CrossRef](#)]
27. Kvamsdal, H.M.; Chikukwa, A.; Hillestad, M.; Zakeri, A.; Einbu, A. A comparison of different parameter correlation models and the validation of an MEA-based absorber model. *Energy Procedia* **2011**, *4*, 1526–1533. [[CrossRef](#)]
28. Osagie, E.; Biliyok, C.; Di Lorenzo, G.; Hanak, D.; Manovic, V. Techno-economic evaluation of the 2-amino-2-methyl-1-propanol (AMP) process for CO₂ capture from natural gas combined cycle power plant. *Int. J. Greenh. Gas Control* **2018**, *70*, 45–56. [[CrossRef](#)]
29. MacDowell, N.; Florin, N.; Buchard, A.; Hallett, J.; Galindo, A.; Jackson, G. An overview of CO₂ capture technologies. *Energy Environ. Sci.* **2010**, *3*, 1645. [[CrossRef](#)]
30. Mahamud, R.; Khan, M.M.K.; Rasul, M.G.; Leinster, M.G. Exergy Analysis and Efficiency Improvement of a Coal Fired Thermal Power Plant in Queensland. In *Thermal Power Plants—Advanced Applications*; IntechOpen Limited: London, UK, 2013.
31. Aspen Technology. *Rate-Based Model of the CO₂ Capture Process by AMP Using Aspen Plus*; Aspen Technology, Inc.: Cambridge, MA, USA, 2008.
32. Tsatsaronis, G.; Czesla, F. *Strengths-and-Limitations-of-Exergy-Analysis*; Institute of Energy Engineering: Berlin, Germany, 1999; Volume 69, pp. 93–100.

33. Sherman, B.J. Thermodynamic and Mass Transfer Modelling of Aqueous Hindered Amines for Carbon Dioxide Capture. Ph.D. Dissertation, University of Texas, Austin, TX, USA, 2016.
34. Herrmann, J. Conversion of Experimental Data for Process Modelling of Novel Amine CO₂ Capture Solvents. Master's Thesis, Norwegian University of Science and Technology, Trondheim, Norway, 2014.
35. Yang, Y. Comprehensive exergy-based evaluation and parametric study of a coal-fired ultra-supercritical power plant. *Appl. Energy* **2013**, *112*, 1087–1099. [[CrossRef](#)]
36. Kvamsdal, H.M.; Rochelle, G.T. Effects of the temperature bulge in CO₂ absorption from flue gas by aqueous monoethanolamine. *Ind. Eng. Chem. Res.* **2008**, *47*, 867–875. [[CrossRef](#)]
37. Anthony, J.L. Carbon dioxide: Generation and capture. In *Energy and Environmental Impacts Related to Sustainability Seminar*; Kansas State University: Manhattan, KS, USA, 2006.
38. Woodhouse, S.; Rushfeldt, P. Improved Absorbent Regeneration. Patent No. WO2008/063079 A2, 29 May 2008.
39. Reddy, S.; Gilmartin, J.; Francuz, V. Integrated Compressor/Stripper Configurations and Methods. U.S. Patent 2009/0205946 A1, 20 August 2009.
40. Le Moullec, Y.; Kanniche, M. Screening of flowsheet modifications for an efficient monoethanolamine (MEA) based post-combustion CO₂ capture. *Int. J. Greenh. Gas Control.* **2011**, *5*, 727–740. [[CrossRef](#)]



© 2019 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).



DSPACE

<https://dspace.org/>

Exergy Analysis and Evaluation of the Different Flowsheeting Configurations for CO₂ Capture Plant Using 2-Amino-2-Methyl-1-Propanol (AMP)

Osagie, Ebuwa; Aliyu, Aliyu M.; Nnabuife, Somtochukwu Godfrey; Omoregbe, Osaze; Etim, Victor

2019-06-24

MDPI

<https://doi.org/10.3390/pr7060391>

Osagie E, Aliyu AM, Nnabuife SG, Omoregbe O and Etim V. Exergy Analysis and Evaluation of the Different Flowsheeting Configurations for CO₂ Capture Plant Using 2-Amino-2-Methyl-1-Propanol (AMP). Processes, Volume 7, Issue 6, June 2019, Article Number 391