

**Advances in algal biomass pretreatment and its valorisation into biochemical and
bioenergy by the microbial processes**

Shashi Kant Bhatia^{a,b}, Vishal Ahuja^c, Neha Chandel^d, Ranjit Gurav^a, Ravi Kant Bhatia^c,
Muthuswamy Govarathanan^e, Vinay Kumar Tyagi^f, Vinod Kumar^g, Arivalagan Pugazendhi^h, J.
Rajesh Banuⁱ, Yung-Hun Yang^{a,b}

^aDepartment of Biological Engineering, College of Engineering, Konkuk University, Seoul
05029, Republic of Korea

^bInstitute for Ubiquitous Information Technology and Applications, Seoul 05029, Republic of
Korea

^cDepartment of Biotechnology, Himachal Pradesh University, Shimla-171005, India

^dSchool of Medical and Allied Sciences, GD Goenka University, Gurugram-122103,
Haryana, India

^eDepartment of Environmental Engineering, Kyungpook National University, Daegu 41566,
Republic of Korea

^fEnvironmental Hydrology Division National Institute of Hydrology (NIH) Roorkee-247667,
Uttarakhand, India

^gCentre for Climate and Environmental Protection, School of Water, Energy and
Environment, Cranfield University, Cranfield MK43 0AL, UK

^hSchool of Renewable Energy, Maejo University, Chiang Mai 50290, Thailand

ⁱDepartment of Life Sciences, Central University of Tamil Nadu, Neelakudi, Thiruvavur-
610005, India

* Correspondence: seokor@konkuk.ac.kr

Abstract

Urbanization and pollution are the major issues of the current time own to the exhaustive consumption of fossil fuels which have a detrimental effect on the nation's economies and air quality due to greenhouse gas (GHG) emissions and shortage of energy reserves. Algae, an autotrophic organism provides a green substitute for energy as well as commercial products. Algal extracts become an efficient source for bioactive compounds having anti-microbial, anti-oxidative, anti-inflammatory, and anti-cancerous potential. Besides the conventional approach, residual biomass from any algal-based process might act as a renewable substrate for fermentation. Likewise, lignocellulosic biomass, algal biomass can also be processed for sugar recovery by different pre-treatment strategies like acid and alkali hydrolysis, microwave, ionic liquid, and ammonia fiber explosion, etc. Residual algal biomass hydrolysate can be used as a feedstock to produce bioenergy (biohydrogen, biogas, methane) and biochemicals (organic acids, polyhydroxyalkanoates) via microbial fermentation.

Keywords: Algal biomass, fermentation, polyhydroxyalkanoates, pretreatment, valorisation

1. Introduction

Excessive exploitation of natural resources and burning of fossil fuels are the major causes of environmental pollution and greenhouse gas (GHG) emissions that can be minimized with the use of renewable and green energy sources (Bhatia et al., 2021b; Rasool et al., 2021). Global warming and the greenhouse effect are mainly attributed to the increase in the concentration of GHG and carbon dioxide (CO₂) identified as one of the largest contributors (M. Kumar et al., 2018). CO₂ assimilation via chemical reactions, and physical storage lack environmental feasibility due to the requirement of large space, investment, and CO₂ spillage (Bhatia et al., 2019). In comparison, biological sequestration is environmentally as well as economically suitable (Liu et al., 2021). Algae and cyanobacteria can assimilate environmental CO₂ at 10-50 times faster rate than terrestrial plants (Onyeaka et al., 2021). Algal based process seems more profitable and feasible due to its autotrophic nature along with the production of various commercially valuable compounds e.g. mono/poly-unsaturated, omega-3 fatty acids, carotenoids, sterols, phyco-proteins, etc., (Mehariya et al., 2021; Patel and Kannan, 2021; Zhou et al., 2022). Algal cultivation methods have been categorized into open and closed cultivation systems. In open pond system algae is cultivated in ponds, and tanks under natural illumination (Saengsawang et al., 2020). The system is economic and cost effective but prone to contamination along with variable yield due to uncontrolled growth conditions (Bhatia et al., 2021a). In contrast, closed cultivation systems /bioreactors-based cultivation provides a controlled growth environment to attain optimum yield (Patel et al., 2022).

Microalgae occupy ~49-132 times less space for higher productivity of oil per unit area as compared to the other crops (Mathimani and Pugazhendhi, 2019; Trivedi et al., 2015). Besides the production of valuable biochemicals, algae are also used in wastewater treatment and pollutant degradation through phycoremediation (Bhuyar et al., 2021; Chandel et al., 2022; Rout et al., 2022). Algal biomass is mainly comprised of three macromolecules

including carbohydrate (8-20%), protein (30-70%), lipids (6-25%), along with a minor fraction of minerals (Viswanathan, 2017). After extraction of required biomolecules, residual biomass can also be used as raw material and transformed into various secondary products like biogas, ethanol, butanol, etc. via fermentation (Guenka Scarcelli et al., 2021; Khammee et al., 2021; Naresh Kumar et al., 2020). The algal cell wall is a complex structure and requires various pretreatment methods such as physical, chemical, biological, and physicochemical to depolymerize the polymeric structure and release free sugars (de Carvalho et al., 2020; Rebello et al., 2020). During the pretreatment, the production of various inhibitors was also reported which can affect microbial fermentation and productivity (Ahuja et al., 2022a; Jung et al., 2019). Detoxification of algal hydrolysate is required before utilizing it as a feedstock for microbial fermentation. Various detoxification methods like the use of activated biochar, liming and rotatory evaporation methods can be used to remove inhibitors (Ahuja et al., 2022b; Kubisch and Ochsenreither, 2022). There are many reports on the valorization of algal biomass hydrolysate to bioenergy (bioalcohol, biogas, and biohydrogen) and biochemicals (organic acids, and biopolymers) using microbial fermentation (Anh et al., 2020; Khammee et al., 2021; Monlau et al., 2021; Nagarajan et al., 2021).

In the present review, the recent advances in algal biomass pretreatment methods and valorization of algal biomass hydrolysate into commercially valuable biochemicals and bioenergy resources using microbial fermentation are summarized.

2. Algal biorefinery and life cycle analysis

Algae are a rich source of omega 3 fatty acids, proteins, carbohydrates, and other bioactive molecules hence itself used as nutraceuticals, feed in aquaculture, cattle feed, fertilizer, and plant bio-stimulant in agriculture (Araújo et al., 2021). Several reports are available for the production of astaxanthin from *Haematococcus pluvialis*, β -carotene from *Dunaliella salina*,

linoleic acid, and α -linoleic acid from *Chlorella vulgaris*, γ -linoleic acid from *Arthrospira platensis*, etc., (Camacho et al., 2019; Kratzer and Murkovic, 2021; Uma et al., 2022). Due to diverse commercial products, algae represent a huge market qualitatively as well as quantitatively (Table 1). According to the market survey report, algal products hold a market share of US\$ 4.7 billion which is expected to increase by 6.3% to attain US\$ 6.4 billion by 2026 (FB 6208, 2021). In some cases, whole biomass is consumed as food while in other cases target compounds are extracted mostly by soxhlet extraction using solvents of different polarities. Due to energy investment and associated risk of heat in presence of solvents, other green technologies have been developed which emphasized the use of supercritical fluid, application of high pressure, microwave, ultrasound, and electric field for the extraction of bioactive compounds with high yield (Saengsawang et al., 2020; Soquetta et al., 2018). Algal biomasses left behind after extraction have carbon rich bio-polymers like carbohydrates, proteins, and lipids. Due to the availability of fermentable sugars and nutrients, microbial biomass can be used as a substrate for secondary fermentation. Algal biomass also required pretreatments like lignocellulosic biomass to release the sugars and make them available for fermentation.

Life cycle analysis (LCA) involves the evaluation of the environmental impact of a product or process from its origin to its final disposal (Di Maria et al., 2020). The various steps include material extraction, processing, manufacture, distribution, and use with the inclusion of various guidelines to validate their utility. Algal based biorefinery goes through stages of algal growth, harvesting, and extraction. LCA analysis shows that the cultivation of algae in wastewater reduces the expenses required to set up a photobioreactor. The selection of pretreatment strategy depends on biomass type and product intended e.g., chemo-enzymatic pretreatment methods are used for biomass pretreatment when carbohydrate rich residual biomass is used as a substrate for fermentative production of biochemicals and

biofuels, whereas for lipid extraction mechanical disruption method is preferred (Rebello et al., 2020). Similarly, for harvesting of algal biomass flocculation and pH adjustment methods are preferred as compared to energy consuming centrifugation method. In relation to pretreatment, biological methods have been found more effective for better yield and productivity with energy consumption. In a study, it was reported that conversion of microalgae to butanol poses less environmental effect on climate and human health as compared to biodiesel production (Wu et al., 2019).

3. Algal biomass pretreatment methods

The algae cell wall is comprised of a fibrillar skeleton and an amorphous matrix. Fibrillar component is made up of cellulose, mannan, and xylans. In terms of biopolymers, algal biomass is comprised of 5-23% carbohydrates followed by 7-23% lipids and 6-52% proteins (Viswanathan, 2017). Some of the algal species like *Chlorella* and *Nannochloropsis* etc. also contained lignin like biopolymer called sporopollenin or algaenan (Vassilev and Vassileva, 2016; Viswanathan, 2017). Algal cell wall thickening affects algal growth, harvesting, and extraction process. Medium engineering and metabolic engineering techniques can be applied to manipulate the algal cell wall constituents. Photosynthesis provides energy and carbon-containing precursors required for the biosynthesis of starch, lipids, and cell wall components. Jeong et al., (2017) reported mild nitrogen deficiency induces cell wall thickening *Nannochloropsis* sp. due to increased transcription level of genes coding for UDP-Glc pyrophosphorylase and cellulose synthase. The complex nature of biomolecule and inert lignin-like material hinders the accessibility for microbes thus pretreatment becomes necessary to improve the digestion and release sugars which can be further used to produce various commercially valuable compounds (Fig. 1). There are various pretreatment methods have been reported and each has its own merits and demerits (Table. 2).

3.1 Physical methods

Biomass can be processed with physical treatment to break the bonds via thermal and radiation to release fermentable sugars from polymers. Physical treatment improves the surface topography and accessibility of biomass for chemical, biological, or other hydrolyzing agents (Aftab et al., 2019). Thermal treatment can be further categorized into low temperature (<100 °C), high temperature (>100 °C), and steam explosion. Treatment at low temperature solubilizes the extracellular components while high temperature results in cell disruption (Passos et al., 2015). Thermal treatment improved the digestibility and improved biogas production but suffered from high energy and associated cost (Nanda et al., 2014).

The microwave offers an effective way of localized heat transfer using electromagnetic waves that utilize the dielectric properties of the target material. Microwaves impose an electric field of 2450 MHz with oscillation of 4.9×10^9 times per second which has the potential to disrupt the structure of biomass (Puligundla et al., 2016). Yin and colleague reported that microwave pretreatment of macroalgae biomass *Laminaria japonica* resulted in improved hydrogen production during the fermentation (Yin et al., 2019). For higher sugar recovery, microwave treatment of biomass may be assisted with acid, alkali, or other hydrolyzing agents (Aftab et al., 2019). Yuan and Macquarrie hydrolyzed brown seaweed *Ascophyllum nodosum* biomass by microwave assisted acid hydrolysis. Saccharification of biomass offered maximum sugar recovery of 127 mg/g biomass when treated with 0.4 M H₂SO₄ (3.13% w/v) at 150 °C for 1 min along with 0.00, 0.01, and 1.8 g/L furfural, hydroxymethyl furfural, and phenolic respectively. The maximum ethanol conversion efficiency of 60.7% (5.57 g/L) was achieved from hydrolysate by *Saccharomyces cerevisiae* ATCC no. 200062 without detoxification (Yuan and Macquarrie, 2015).

3.2 Chemical methods: There are different chemical-based methods such as acid/base hydrolysis, ozonation, ionic liquid treatment, etc. have been reported for pretreatment of algal biomass (Rebello et al., 2020; Taherzadeh et al., 2020).

Acid hydrolysis: It acts directly on cellulose and hemicellulose fraction in biomass and hydrolyses the bonds that aid in depolymerization and release of monomeric sugars. The yield of C-5 and C-6 in hydrolysate depends upon acid concentration and treatment conditions (Phwan et al., 2019). The major drawback of acid hydrolysis is the production of sugar and lignin derivatives including furfurals, 5-hydroxymethylfurfural, and phenolic acids which acts as microbial inhibitors. Hydrochloric acid and sulfuric acid are the common acids used for biomass hydrolysis however oxalic acid, and maleic acid might offer efficient hydrolysis and less toxicity for fermentation (Aftab et al., 2019). The reaction between acidic proton and oxygen involved in bond formation between two glucose units, forms conjugated acid. Cleavage of the C-O bond is followed by the release of proton and the formation of sugar molecules in presence of water (Joksimović and Marković, 2007).

Laurens et al., have found that late harvest of *Scenedesmus* and *Chlorella* improved the biofuel yield. Hydrolysis of biomass with 10% H₂SO₄ released >90% of available glucose in hydrolysate from biomass (Laurens et al., 2015). Phwan and colleagues compared the sugar yield from *Chlorella* biomass after treatment with dilute sulfuric acid and acetic acids of different concentrations ranging from 1%, 3%, 5%, 7%, and 9% (v/v). Sugar recovery from both the acids was almost equal at all the concentrations however H₂SO₄ was more efficient (Phwan et al., 2019).

Alkali hydrolysis: Sodium hydroxide is the most common alkali used for biomass processing but calcium hydroxide is the cheapest as recovery and reuse are possible (Aftab et al., 2019). In alkaline treatment alkali targets lignin where excess OH⁻ makes hydrogen bond between cellulose and hemicellulose and ester bond between saponified hemicellulose and lignin

sensitive and weak followed by solubilisation of majority of lignin (Zhang, 2021). Comparative evaluation of acid and alkali methods revealed that alkaline treatment (1.2 % alkali at 140 °C for 30 min) was more efficient and exhibited sugar recovery of 23.67 wt% sugars/g algal biomass (Rehman and Anal, 2018). Enzymatic hydrolysis of alkali pretreated *Chlorella* biomass with cellulase cocktail from *Trichoderma longibrachiatum* resulted in >84% hydrolysis and offered maximum reducing sugar of 413.42 ± 7.62 mg/g biomass (Kassim et al., 2019). Maceiras et al., reported maximum reducing sugars *i.e.* 1.02 ± 0.01 g/L recovered from algal biomass after treatment with 1% NaOH in ration 1:10 (alkali: biomass) in a microwave of 249 W for 12.5 (Maceiras et al., 2021).

Ozonation: Ozone pretreatment is one of the approaches employed to improve biomass digestibility without generating inhibitors as in the case of acid hydrolysis. Ozone acts as an oxidizing agent and acts on lignin and liberates lower molecular weight fragments. Ozone is soluble in water hence biomass moisture content affects lignin oxidization and oxidation lowered in high moisture content as water film restricts the ozone interaction with biomass (Travaini et al., 2015). Ozonolysis in presence of an alkaline environment promotes delignification (Aftab et al., 2019). Keris-Sen and Guro reported that ozonolysis of algal biomass with different O₃ dosages of 0.25-2.0 g O₃/g DWB improved enzymatic saccharification and carbohydrate recovery. Ozonolysis of algal biomass with 0.5 g O₃/DWB for 4 h offered a maximum glucose yield of 80.6% (w/w) of total carbohydrates (Keris-Sen and Gurol, 2017).

Ionic liquid: Ionic liquids are the solvents that offered the benefit of ions (cations or anions) with high thermal stability and polarity at less melting point, and negligible vapor pressure. Different ionic liquids which have the capability to solubilize cellulose consist of morpholinium⁺, phosphonium⁺, imidazolium⁺, pyridinium⁺, or ammonium⁺ based cations and anions that can form a hydrogen bond with the hydroxyl group of cellulose (Hou et al., 2017).

Anions that form strong hydrogen bonding are not always capable of dissolving cellulose as cations can also indirectly influence the dissolving ability of ILs. Ionic liquids disrupt the native structure of biomass by competing for hydrogen bonding and manipulate the regular structure (Aftab et al., 2019). To et al., compared different ionic liquids for lipid and sugar extraction from *C. vulgaris* and *Spirulina platensis*. Choline amino acid based ionic liquids treatment of *Chlorella* and *Spirulina* recovered 30.6% and 51% total lipids and 71% and 26% total sugars (Q. To et al., 2018). Zhou and colleagues employed repeated use of ionic liquids for lipid extraction from microalgal biomass. Treatment of biomass with ionic liquid [BMIM][MeSO₄] at 70 °C for 2 h showed the best lipid extraction efficiency (17% total lipids of dry weight). The 1 : 7 and 1 : 3 were the optimized ration of ionic liquid for the complete extraction of the lipids (Zhou et al., 2019). Weldemhret et al., also reported that ionic liquid (IL) pretreatment deconstructs the *Gelidium amansii* cell wall. Among ILs screened, [Bmim]Ac was the most effective IL with 99% dissolution along with methanol as antisolvent offered 78% reconstitution. Hydrolysis of IL-treated biomass with α -neoagarobiose hydrolase ‘AhgI’ offered maximum yields of 56.5% D-Gal and 33.7% of 3,6-anhydro-L-galactose (Weldemhret et al., 2019).

3.3 Biological methods

In comparison to chemical and physical treatment methods, biological methods offered a green solution for biomass processing along with operation under mild operating conditions. The transformation value of a feedstock relies upon the availability of target compounds like cellulose, and xylans. Cellulases, xylanases, hemicellulases, pectinases, glucosidases, and amylases are the major enzymes that can be used to hydrolyze the cellulose and xylan in algal biomass. Some of the organisms can accumulate comparatively higher structural components in response to environmental or stimulus response. *Chlamydomonas reinhardtii* UTEX90 can accumulate up to 44% of starch that can be used as fermentable feedstock. Treatment of *C.*

reinhardtii biomass with thermostable α -amylase from *Bacillus licheniformis* and amyloglucosidase from *Aspergillus niger* released glucose directly as a result of starch hydrolysis and offered a maximum glucose yield of 235 mg/g algal biomass (Choi et al., 2010). Similarly, Mahdy et al. also reported the treatment of algal biomass with carbohydrases and proteases for solubilization of organic matter. Protease treatment leads to 54% hydrolysis of organic matter and resulted in 6.3 folds higher methane yield (Mahdy et al., 2016). Monjed et al., isolated crude enzyme extracts from *Penicillium chrysogenum*, *A. tubingensis*, *A. fumigatus*, and *Thermomyces lanuginosus* for the treatment of *C. vulgaris* biomass (Monjed et al., 2021). The crude enzyme from *A. fumigatus* was most efficient in biomass saccharification at 37 °C and extracted 67% of sugars from intact biomass and 94% from defatted biomass. It also exhibited complete saccharification from intact biomass at 50 °C (Monjed et al., 2021).

3.4 Physicochemical methods

Ammonia Fiber Explosion (AFEX): AFEX combined the use of NH₃ (chemical agent) and pressure (physical factor) for biomass processing. In AFEX, liquid (anhydrous) ammonia is mixed with moist biomass and kept at a moderate operating pressure of 6.5-45 bar and temperatures of 60–200 °C for about 5–30 min (Bensah and Mensah, 2018). Followed by an incubation period, pressure will be dropped suddenly to atmospheric pressure that led to depolymerization of biomass. Pretreatment of biomass with ammonia creates an interconnected nanoscale network by breaking the carbohydrate-lignin ester bonds and is responsible for the removal of lignin along with decrystallization of cellulose and loss of some hemicelluloses. Usually, less than 2 Kg ammonia is required per Kg of dry biomass (Bensah and Mensah, 2018). The use of AFEX in the case of algal biomass is not well established but some findings have shown the efficiency of free ammonia (Singh et al., 2022). Wang and colleague have shown that poor digestion of algal biomass by methanogens

might be responsible for low methane production. It was found that treatment with free ammonia (240530 mg NH₃-N/L) for 24 h increased the algae solubilisation from 0.01 SCOD/g TOD (SCOD: soluble chemical oxygen demand; TCOD: total chemical oxygen demand) to 0.05-0.06 g SCOD/g TCOD. Further, the biomass hydrolysis rate (k) and methane potential (P₀) were increased from 0.21/d and 132 L CH₄/kg TCOD respectively in control to 0.33-0.50/d and 140-154 L CH₄/kg TCOD respectively in the treated group (Wang et al., 2019).

CO₂ explosion /Supercritical carbon dioxide: Supercritical fluids are the substances that remained in homogeneous phase-condition above their critical temperature and pressure and exhibit characteristics including diffusivity, viscosity, and density between gases and liquids. In general, the efficiency of treatment increased with temperature but carbohydrates might start degrading at a higher temperature range and form furan derivatives and organic acids. Among different supercritical fluids, supercritical carbon dioxide (scCO₂) is commonly used due to moderate critical conditions (31.1 °C and 74 bar), low-toxicity, non-flammability, and wide availability (Escobar et al., 2020). The scCO₂ act by rapid expansion within biomass fiber to disrupt the native structure of biomass. Due to zero dipole moment, scCO₂ mainly targets non-polar or weakly polar compounds however its solvation power may be modulated in the presence of co-solvents. In presence of moisture in biomass, scCO₂ forms carbonic acid and promotes hemicellulose hydrolysis (Escobar et al., 2020; Li et al., 2014). Michalak et al., treated marine macroalgae including *Polysiphonia*, *Ulva*, and *Cladophora* species, collected from Baltic Sea for the extraction of plant growth stimulatory compounds. The dried algal biomass was exposed to CO₂ in the ratio of 78.7 Kg CO₂/Kg biomass at a pressure of 500 bar. Particle size has a direct effect on extraction as maximum extraction of 17.9 g/Kg biomass was achieved from fine grained biomass. Composition analysis revealed the presence of phytohormones along with macro and microelements (Michalak et al., 2016).

4. Algal biomass hydrolysate valorization by microbial fermentation

Algal biomass can be fermented into biofuels, biohydrogen, biomethane, biogas, biodiesel, and organic acids – thus turning trash into cash (Tables 3 and 4). Algae-based biorefineries thus offer a solution for meeting future needs and moving towards sustainability (Fig. 2) (Rajesh Banu et al., 2020).

4.1 Bioenergy

High dependence on nonrenewable fossil fuels to fulfill the energy requirement is a matter of concern economically as well as environmentally. The negative impacts can be minimized by the use of renewable, cleaner, and greener alternative fuels. Algal biomass can be used as feedstock for microbial fermentation to produce biogas, bioalcohol, biohydrogen, etc. Monlau et al., used defatted and enzymatic hydrolyzed algal biomass of *Chlorella protothecoides* for biogas production using a continuous stirred tank bioreactor under anaerobic conditions and reported biogas production rich in methane ($196 \pm 4 \text{ Nm}^3 \text{ CH}_4/\text{t VS}$) (Monlau et al., 2021). Biomethane production from raw *Scenedesmus* sp. and residues obtained after amino acid and lipid extraction have been compared in another study. The raw residues showed a methane yield of $140 \pm 29.4 \text{ L}_{\text{CH}_4}/\text{kg VS}$ while amino acid extracted algal residues showed methane yields of $272 \pm 7.3 \text{ L}_{\text{CH}_4}/\text{kg VS}$ and lipid extracted residues showed a yield of $212 \pm 5.6 \text{ L}_{\text{CH}_4}/\text{kg VS}$ (Ramos-Suárez and Carreras, 2014).

Generation of hydrogen from dark fermentation involves hydrogenase enzyme. Protons accept excess electrons generated by the oxidation of organic substrates and generate hydrogen in this process (Ghimire et al., 2015). The dark fermentation process has gained attention because of its simplicity and negative energy balance. Hydrogen is produced either by acetate or butyrate pathways. Theoretically, 1 mol of glucose yields 4 mol of H_2 through the acetate pathway and 2 mol of H_2 through the butyrate pathway. Fermentation is achieved using hydrogen producing bacteria (Table. 3) (Sambusiti et al., 2015). Different algal biomass

Chlorella, *Chlamydomonas*, *Scenedesmus* sp., have been explored for bioethanol production mainly because of their high carbohydrate content using *S. cerevisiae* and *Zymomonas* sp. (Harun et al., 2010). *L. japonica* biomass has been fermented after the addition of mannitol, using *S. cerevisiae* KCCM50550, and an ethanol yield of 2.59 g/L was obtained (Lee and Lee, 2012). Park et al, has used a genetically engineered strain of *Klebsiella oxytoca* capable of utilizing mixed sugars present in *Golenkinia* sp. hydrolysates for 2-3 butanediol production (Park et al., 2017).

4.2 Organic acids: Algal biomass can be fermented into high valuable organic acids like pyruvic acid, succinic acid, and lactic acid. These acids are the building blocks for the synthesis of commercially valuable products in the food and pharmaceutical industries. Citric acid has been synthesized from red algae *Gelidiella acerosa* with a yield of 0.357g/g, using *A. niger* (Ramesh and Kalaiselvam, 2011). Enzyme hydrolysed mixture of *L. digitate* has been used for the production of succinic acid (0.865 g/g) by using *Actinobacillus succinogenes* DSM2257 strain (Alvarado-Morales et al., 2015). Acid treated and enzyme hydrolysed Green alga *Ulva reticulata* can be fermented using *Halomonas* sp. BL6 to yield pyruvic acid (0.368 g/g) (Anh et al., 2020). *C. sorokiniana* SLA-04 and *S. obliquus* UTEX 393 have also been shown to undergo auto fermentation under alkaline conditions for lactic acid, acetate, and formic acid synthesis. The yield of acetate and formic acid can be increased under anoxic conditions (Pendyala et al., 2020). Apart from these several genetically modified strains have been used to increase the production of organic acids. An example is the deletion of *aceE* (pyruvate dehydrogenase), *ldhA* (D- lactate dehydrogenase), *poxB* (pyruvate oxidase), and *pps* (PEP synthase) genes, associated with byproducts accumulation and knocking out genes *ptsG*, *manZ* and *glk* to enhance xylose utilization, which has been shown to increase the yield of propionic acid (Maleki et al., 2018; Zhang et al., 2021).

4.3 Biopolymers: Polyhydroxyalkanoates (PHAs) are synthesized and stored by microorganisms as carbon and energy reserves (Lee et al., 2022). PHA offers an ecofriendly solution to petroleum-based plastic, owing to its high functionality, biocompatibility, and biodegradability (Liu et al., 2021). Industrial production of biopolymers is expensive as almost 40% of the cost is due to feedstock. The solution is offered by the use of agricultural waste or nonfood feedstock like macro and microalgae (Bhatia et al., 2021a). The latter is a more promising approach, due to its high sugar and low lignin content (Khomlaem et al., 2020). The polysaccharides present in algae are finally converted to glucose, followed by its conversion to acetyl-CoA. The next step in the synthesis of PHA is the conversion of acetyl CoA to acetoacetyl-CoA by the enzyme β -ketothiolase. Acetoacetyl CoA reductase converts it to 3-hydroxybutyryl-CoA and is finally polymerized to polyhydroxybutyrate by PHA synthase (Noreen et al., 2016). Algal biomass can be pre-treated using acid and high-temperature conditions and further fermented using PHA producing bacteria like *Alphaproteobacteria*, *Gammaproteobacteria*, *Cupriavidus necator*, *Bacillus megaterium*, *Haloferax mediterranei*, *Paracoccus* sp. LL 1, recombinant *E. coli*, etc. (Alkotaini et al., 2016; Fradinho et al., 2013). Biorefineries can be strengthened using co-production approaches, which generate more valuable chemicals. Khomlaem et al., (2020) reported coproduction of PHA (3.62 g/L) and carotenoid (6.08 mg/L) from the fermentation of defatted *Chlorella* sp. using *Paracoccus* sp. LL 1 at 5 L scale.

5. Technological challenges and future perspective: Algal biomass based bioproducts and biorefinery offer a renewable solution to meet future energy and high-value chemical and products demands but its commercialization is still challenging. This is mainly owed to multiple factors like the high cost of cultivation of algae, their seasonal harvesting time which influences their biochemical composition, taxonomic structure, more energy-consuming processing techniques, cost of equipment, and high downstream processing costs (Zhou et al.,

2022). Open and closed installations are thus preferred to control the algal proliferation. These include concrete ponds, circular ponds with stirrers, photobioreactors, biooil reactors, and plate bioreactors. But this adds to the additional cost of the process. The high cost of cultivation can be overcome by utilizing the natural algae from water blooms. But most of the natural algae have high ash content compared to carbon and nitrogen content. Secondly, their harvesting is challenging, which increases the cost of operation. Traditional harvesting techniques include the use of centrifugation, sedimentation, floatation, and flocculation techniques and all of them have their own set of drawbacks (Zhou et al., 2022). Uses of chemicals and metals further contaminate the biomass, making the downstream processing expensive. Future studies can be focused on the development of such harvesting technologies. One such innovative harvesting technique is the use of iron-based magnetic nanoparticles, used to harvest *C. vulgaris* and *S. platensis* (Almomani, 2020). Alternatively, biological flocculation offers a promising solution that can be explored in the future. Flocculating microorganisms like *Aspergillus* sp. UMN01 has been used to flocculate non-flocculating algae *C. vulgaris* UMN235 (Zhou et al., 2012).

For the economic feasibility of algal biorefineries, the challenge remains to scale up the production of bioproducts with high purity, maximized yield, and productivity (Zhou et al., 2022). The yield can be improved by the addition of co-substrates along with algal biomass (Dębowski et al., 2013). The focus should be on decreasing the energy consumption and cost of the overall process. Attention can be focused on the coupling of biodiesel and methane production, which has been shown to increase the energy produced by up to 40%, making it more economical (Bohutskyi et al., 2015). Pretreatment processes also affect the overall economics of the process and have disadvantages. The use of physical methods increases the cost of energy input and they are ineffective in removing lignin and inhibit cellulases. On the other side, acidic chemicals are corrosive and lead to the formation of

inhibitors while alkaline hydrolysis leads to low digestibility. The use of ionic liquids is expensive and has low biodegradability.

For sustainable development, it is imperial to integrate the conversion processes and work on the generation of multi-product algal biorefineries. The focus should be emphasized on the regulation of metabolic flux to increase yields of desirous products and optimization of these processes. Techno-economic feasibility of these processes should also be accessed to make the scale up process feasible at a commercial scale.

6. Conclusions

The feasibility of the commercialization of algal biotechnology depends on the utilization of biomass and the synthesis of multi-products of high-value products. The product recovery from algal biomass can be improved by using advanced extraction methods. Leftover algal biomass after extraction of valuable molecules should be further utilized as feedstock for microbial fermentation to produce other valuable bioenergy resources and biochemicals. Although there are many reports on the valorisation of algal biomass still there are few efforts were made to integrate the algal-based product production and valorization of residual algal biomass to improve the overall economics of the process.

Acknowledgment

The authors would like to acknowledge the KU Research Professor Program of Konkuk University, Seoul, South Korea. This research was supported by the C1 Gas Refinery Program through the National Research Foundation of Korea (NRF), funded by the Ministry of Science and ICT (2015M3D3A1A01064882) and by the National Research Foundation of Korea (NRF) [NRF-2019M3E6A1103979, NRF-2017M3A9E4077234, and NRF-2021R1F1A1050325]. This study was also performed with the support of the R&D Program of MOTIE/KEIT [grant number 20014350].

References

1. A03875, 2021. Spirulina Market Size, Trends & Growth Analysis by 2027. Allied Market Research. <https://www.alliedmarketresearch.com/spirulina-market>. (Accessed on 15032022).
2. Aftab, M.N., Iqbal, I., Riaz, F., Karadag, A., Tabatabaei, M., 2019. Different pretreatment methods of lignocellulosic biomass for use in biofuel production, biomass for bioenergy - recent trends and future challenges. IntechOpen. <https://doi.org/10.5772/intechopen.84995>.
3. Ahuja, V., Bhatt, A.K., Mehta, S., Sharma, V., Rathour, R.K., Sheetal, 2022a. Xylitol production by *Pseudomonas gessardii* VXlt-16 from sugarcane bagasse hydrolysate and cost analysis. Bioprocess Biosyst. Eng. <https://doi.org/10.1007/s00449-022-02721-z>.
4. Ahuja, V., Kshirsagar, S., Ghosh, P., Sarkar, B., Sutar, A., More, S., Dasgupta, D., 2022b. Process development for detoxification of corncob hydrolysate using activated charcoal for xylitol production. J. Environ. Chem. Eng. 10, 107097. <https://doi.org/10.1016/j.jece.2021.107097>.
5. Alkotaini, B., Koo, H., Kim, B.S., 2016. Production of polyhydroxyalkanoates by batch and fed-batch cultivations of *Bacillus megaterium* from acid-treated red algae. Korean J. Chem. Eng. 33, 1669–1673. <https://doi.org/10.1007/s11814-015-0293-6>.
6. Almomani, F., 2020. Algal cells harvesting using cost-effective magnetic nano-particles. Sci. Total. Environ. 720, 137621. <https://doi.org/10.1016/j.scitotenv.2020.137621>.
7. Alvarado-Morales, M., Gunnarsson, I.B., Fotidis, I.A., Vasilakou, E., Lyberatos, G., Angelidaki, I., 2015. *Laminaria digitata* as a potential carbon source for succinic acid and bioenergy production in a biorefinery perspective. Algal. Res. 9, 126–132. <https://doi.org/10.1016/j.algal.2015.03.008>.
8. Anh, H.T.L., Kawata, Y., Tam, L.T., Thom, L.T., Ha, N.C., Hien, H.T.M., Thu, N.T.H., Huy, P.Q., Hong, D.D., 2020. Production of pyruvate from *Ulva reticulata* using the

alkaliphilic, halophilic bacterium *Halomonas* sp. BL6. *J Appl Phycol* 32, 2283–2293 (2020). <https://doi.org/10.1007/s10811-020-02035-1>.

9. Araújo, R., Vázquez Calderón, F., Sánchez López, J., Azevedo, I.C., Bruhn, A., Fluch, S., Garcia Tasende, M., Ghaderiardakani, F., Ilmjärv, T., Laurans, M., Mac Monagail, M., Mangini, S., Peteiro, C., Rebours, C., Stefansson, T., Ullmann, J., 2021. Current status of the algae production industry in europe: an emerging sector of the blue bioeconomy. *Front. Mar. Sci.* 7. <https://doi.org/10.3389/fmars.2020.626389>.
10. Ben Yahmed, N., Carrere, H., Marzouki, M.N., Smaali, I., 2017. Enhancement of biogas production from *Ulva* sp. by using solid-state fermentation as biological pretreatment. *Algal. Res.* 27, 206–214. <https://doi.org/10.1016/j.algal.2017.09.005>
11. Bensah, E.C., Mensah, M.Y., 2018. Emerging physico-chemical methods for biomass pretreatment, fuel ethanol production from sugarcane. *IntechOpen*. <https://doi.org/10.5772/intechopen.79649>.
12. Bhatia, S.K., Bhatia, R.K., Jeon, J.-M., Kumar, G., Yang, Y.-H., 2019. Carbon dioxide capture and bioenergy production using biological system – A review. *Renew. Sustain. Energy Rev.* 110, 143–158. <https://doi.org/10.1016/j.rser.2019.04.070>.
13. Bhatia, S.K., Jagtap, S.S., Bedekar, A.A., Bhatia, R.K., Patel, A.K., Pant, D., Rajesh Banu, J., Rao, C.V., Kim, Y.-G., Yang, Y.-H. 2020. Recent developments in pretreatment technologies on lignocellulosic biomass: Effect of key parameters, technological improvements, and challenges. *Bioresour. Technol.* 300, 122724. <https://doi.org/10.1016/j.biortech.2019.122724>.
14. Bhatia, S.K., Mehariya, S., Bhatia, R.K., Kumar, M., Pugazhendhi, A., Awasthi, M.K., Atabani, A.E., Kumar, G., Kim, W., Seo, S.-O., Yang, Y.-H., 2021a. Wastewater based microalgal biorefinery for bioenergy production: Progress and challenges. *Sci. Total Environ.* 751, 141599. <https://doi.org/10.1016/j.scitotenv.2020.141599>.

15. Bhatia, S.K., Palai, A.K., Kumar, A., Bhatia, R.K., Kumar Patel, A., Kumar Thakur, V.,
Yang, Y.-H., 2021b. Trends in renewable energy production employing biomass-based
biochar. *Bioresour. Technol.* 340, 125644. <https://doi.org/10.1016/j.biortech.2021.125644>.
16. Bhuyar, P., Trejo, M., Dussadee, N., Unpaprom, Y., Ramaraj, R., Whangchai, K., 2021.
Microalgae cultivation in wastewater effluent from tilapia culture pond for enhanced
bioethanol production. *Water Sci. Technol.* 84, 2686–2694.
<https://doi.org/10.2166/wst.2021.194>.
17. Bohutskyi, P., Chow, S., Ketter, B., Betenbaugh, M.J., Bouwer, E.J., 2015. Prospects for
methane production and nutrient recycling from lipid extracted residues and whole
Nannochloropsis salina using anaerobic digestion. *Appl. Energy* 154, 718–731.
<https://doi.org/10.1016/j.apenergy.2015.05.069>.
18. Brodeur, G., Yau, E., Badal, K., Collier, J., Ramachandran, K.B., Ramakrishnan, S., 2011.
Chemical and physicochemical pretreatment of lignocellulosic biomass: a review. *Enzyme
Res.* 2011, e787532. <https://doi.org/10.4061/2011/787532>.
19. Camacho, F., Macedo, A., Malcata, F., 2019. Potential industrial applications and
commercialization of microalgae in the functional food and feed industries: a short review.
Mar. Drugs 17, 312. <https://doi.org/10.3390/md17060312>.
20. Capolupo, L., Faraco, V., 2016. Green methods of lignocellulose pretreatment for
biorefinery development. *Appl. Microbiol. Biotechnol.* 100, 9451–9467.
<https://doi.org/10.1007/s00253-016-7884-y>.
21. Capson-Tojo, G., Torres, A., Muñoz, R., Bartacek, J., Jeison, D., 2017. Mesophilic and
thermophilic anaerobic digestion of lipid-extracted microalgae *N. gaditana* for methane
production. *Renew. Energy* 105, 539–546. <https://doi.org/10.1016/j.renene.2016.12.052>.
22. Carreira-Casais, A., Otero, P., Garcia-Perez, P., Garcia-Oliveira, P., Pereira, A.G., Carpena,
M., Soria-Lopez, A., Simal-Gandara, J., Prieto, M.A., 2021. Benefits and drawbacks of

ultrasound-assisted extraction for the recovery of bioactive compounds from marine algae.

Int. J. Environ. Res. Public. Health 18, 9153. <https://doi.org/10.3390/ijerph18179153>.

23. Chandel, N., Ahuja, V., Gurav, R., Kumar, V., Tyagi, V.K., Pugazhendhi, A., Kumar, G., Kumar, D., Yang, Y.-H., Bhatia, S.K., 2022. Progress in microalgal mediated bioremediation systems for the removal of antibiotics and pharmaceuticals from wastewater. Sci. Total Environ. 825, 153895. <https://doi.org/10.1016/j.scitotenv.2022.153895>.

24. Chen, X., Li, H., Sun, S., Cao, X., Sun, R., 2016. Effect of hydrothermal pretreatment on the structural changes of alkaline ethanol lignin from wheat straw. Sci. Rep. 6, 39354. <https://doi.org/10.1038/srep39354>.

25. Chen, Y., Stevens, M.A., Zhu, Y., Holmes, J., Xu, H., 2013. Understanding of alkaline pretreatment parameters for corn stover enzymatic saccharification. Biotechnol. Biofuels 6, 8. <https://doi.org/10.1186/1754-6834-6-8>.

26. Choi, S.P., Nguyen, M.T., Sim, S.J., 2010. Enzymatic pretreatment of *Chlamydomonas reinhardtii* biomass for ethanol production. Bioresour. Technol. 101, 5330–5336. <https://doi.org/10.1016/j.biortech.2010.02.026>.

27. de Carvalho, J.C., Magalhães, A.I., de Melo Pereira, G.V., Medeiros, A.B.P., Sydney, E.B., Rodrigues, C., Aulestia, D.T.M., de Souza Vandenberghe, L.P., Soccol, V.T., Soccol, C.R., 2020. Microalgal biomass pretreatment for integrated processing into biofuels, food, and feed. Bioresour. Technol. 300, 122719. <https://doi.org/10.1016/j.biortech.2019.122719>.

28. Dębowski, M., Zieliński, M., Grala, A., Dudek, M., 2013. Algae biomass as an alternative substrate in biogas production technologies—Review. Renew. Sustain. Energy Rev. 27, 596–604. <https://doi.org/10.1016/j.rser.2013.07.029>.

29. Den, W., Sharma, V.K., Lee, M., Nadadur, G., Varma, R.S., 2018. Lignocellulosic biomass transformations via greener oxidative pretreatment processes: access to energy and value-added chemicals. *Front. Chem.* 6. <https://doi.org/10.3389/fchem.2018.00141>.
30. Di Maria, A., Eyckmans, J., Van Acker, K., 2020. 26 - Use of LCA and LCC to help decision-making between downcycling versus recycling of construction and demolition waste, in: Pacheco-Torgal, F., Ding, Y., Colangelo, F., Tuladhar, R., Koutamanis, A. (Eds.), *Advances in Construction and Demolition Waste Recycling*, Woodhead Publishing Series in Civil and Structural Engineering. Woodhead Publishing, pp. 537–558. <https://doi.org/10.1016/B978-0-12-819055-5.00026-7>
31. Dinesh Kumar, M., Kaliappan, S., Gopikumar, S., Zhen, G., Rajesh Banu, J., 2019. Synergetic pretreatment of algal biomass through H₂O₂ induced microwave in acidic condition for biohydrogen production. *Fuel* 253, 833–839. <https://doi.org/10.1016/j.fuel.2019.05.066>.
32. Dubey, S., Mishra, S., 2021. Efficient production of polyhydroxyalkanoate through halophilic bacteria utilizing algal biodiesel waste residue. *Front. Bioeng. Biotechnol.* 9. <https://doi.org/10.3389/fbioe.2021.624859>.
33. Escobar, E.L.N., da Silva, T.A., Pirich, C.L., Corazza, M.L., Pereira Ramos, L., 2020. Supercritical fluids: a promising technique for biomass pretreatment and fractionation. *Front. Bioeng. Biotechnol.* 8. <https://doi.org/10.3389/fbioe.2020.00252>.
34. Fathima, A.A., Sanitha, M., Kumar, T., Iyappan, S., Ramya, M., 2016. Direct utilization of waste water algal biomass for ethanol production by cellulolytic *Clostridium phytofermentans* DSM1183. *Bioresour. Technol.* 202, 253–256. <https://doi.org/10.1016/j.biortech.2015.11.075>.
35. FB 5254, 2021. Astaxanthin Market Growth, Size, and Forecast to 2026 (Survey report No. FB 5254). Markets and Markets. (Accessed on 17032022).

- 537 36. FB 6208, 2021. Algae Products Market by Type (Lipids, Carotenoids, Carrageenan,
 538 Alginate, Algal Protein), Facility Type, Form (Liquid, Solid), Source (Brown Algae, Green
 539 Algae, Red Algae, Blue-green Algae), and Region - Global Forecast to 2026 (Market
 540 Survey Report No. FB 6208), ALGAE PRODUCTS MARKET. Markets and Markets.
 541 (Assessed on 17032022).
- 542 37. Fradinho, J.C., Domingos, J.M.B., Carvalho, G., Oehmen, A., Reis, M. a. M., 2013.
 543 Polyhydroxyalkanoates production by a mixed photosynthetic consortium of bacteria and
 544 algae. *Bioresour. Technol.* 132, 146–153. <https://doi.org/10.1016/j.biortech.2013.01.050>.
- 545 38. Gao, K., Orr, V., Rehmann, L., 2016. Butanol fermentation from microalgae-derived
 546 carbohydrates after ionic liquid extraction. *Bioresour. Technol.* 206, 77–85.
 547 <https://doi.org/10.1016/j.biortech.2016.01.036>.
- 548 39. Ghimire, A., Frunzo, L., Pirozzi, F., Trably, E., Escudie, R., Lens, P.N.L., Esposito, G.,
 549 2015. A review on dark fermentative biohydrogen production from organic biomass:
 550 Process parameters and use of by-products. *Appl. Energy* 144, 73–95.
 551 <https://doi.org/10.1016/j.apenergy.2015.01.045>.
- 552 40. Global Carrageenan Market Research Report 2020, 2020. 360 Research Report.
 553 <https://www.grandviewresearch.com/industry-analysis/carrageenan-market>. (Accessed on
 554 17032022).
- 555 41. Gu, T., Held, M.A., Faik, A., 2013. Supercritical CO₂ and ionic liquids for the pretreatment
 556 of lignocellulosic biomass in bioethanol production. *Environ. Technol.* 34, 1735–1749.
 557 <https://doi.org/10.1080/09593330.2013.809777>.
- 558 42. Guenka Scarcelli, P., Ruas, G., Lopez-Serna, R., Leite Serejo, M., Blanco, S., Árpád
 559 Boncz, M., Muñoz, R., 2021. Integration of algae-based sewage treatment with anaerobic
 560 digestion of the bacterial-algal biomass and biogas upgrading. *Bioresour. Technol.* 340,
 561 125552. <https://doi.org/10.1016/j.biortech.2021.125552>.

43. Harun, R., Danquah, M.K., Forde, G.M., 2010. Microalgal biomass as a fermentation feedstock for bioethanol production. *J. Chem. Technol. Biotechnol.* 85, 199–203. <https://doi.org/10.1002/jctb.2287>.
44. Hou, Q., Ju, M., Li, W., Liu, L., Chen, Y., Yang, Q., 2017. Pretreatment of lignocellulosic biomass with ionic liquids and ionic liquid-based solvent systems. *Mol. J. Synth. Chem. Nat. Prod. Chem.* 22, 490. <https://doi.org/10.3390/molecules22030490>.
45. IMARC, 2022. Algae Oil Market Growth, Report, Size and Forecast 2022-2027. IMARC. <https://www.imarcgroup.com/algae-oil-market>. (Accessed on 17032022)
46. Jeong, S.W., Nam, S.W., HwangBo, K., Jeong, W.J., Jeong, B., Chang, Y.K., Park, Y.-I., 2017. Transcriptional regulation of cellulose biosynthesis during the early phase of nitrogen deprivation in *Nannochloropsis salina*. *Sci. Rep.* 7, 5264. <https://doi.org/10.1038/s41598-017-05684-4>
47. Joksimović, G., Marković, Z., 2007. Investigation of the mechanism of acidic hydrolysis of cellulose. *Acta Agric. Serbica* 12, 51–57. <https://scindeks-clanci.ceon.rs/data/pdf/0354-9542/2007/0354-95420724051J.pdf>.
48. Jung, H.R., Lee, J.H., Moon, Y.M., Choi, T.R., Yang, S.Y., Song, H.S., Park, J.Y., Park, Y.L., Bhatia, S.K., Gurav, R., Ko, B.J., Yang, Y.H. 2019. Increased tolerance to furfural by introduction of polyhydroxybutyrate synthetic genes to *Escherichia coli*. *J. Microbiol. Biotechnol.* 2019;29:776-784. <https://doi.org/10.4014/jmb.1901.01070>.
49. Kassim, M.A., Tan, K.M., Serri, N.A., 2019. Enzymatic hydrolysis of dilute alkaline pretreated *Chlorella* sp. biomass for biosugar production and fed-batch bioethanol fermentation. *Asia-Pac. J. Sci. Technol.* 24, 24–01. <https://doi.org/10.14456/apst.2019.4>.
50. Keris-Sen, U.D., Gurol, M.D., 2017. Using ozone for microalgal cell disruption to improve enzymatic saccharification of cellular carbohydrates. *Biomass Bioenergy* 105, 59–65. <https://doi.org/10.1016/j.biombioe.2017.06.023>.

51. Khammee, P., Ramaraj, R., Whangchai, N., Bhuyar, P., Unpaprom, Y., 2021. The immobilization of yeast for fermentation of macroalgae *Rhizoclonium* sp. for efficient conversion into bioethanol. *Biomass Convers. Biorefinery* 11, 827–835. <https://doi.org/10.1007/s13399-020-00786-y>
52. Khomlaem, C., Aloui, H., Deshmukh, A.R., Yun, J.-H., Kim, H.-S., Napathorn, S.C., Kim, B.S., 2020. Defatted *Chlorella* biomass as a renewable carbon source for polyhydroxyalkanoates and carotenoids co-production. *Algal Res.* <https://doi.org/10.1016/j.algal.2020.102068>.
53. Knoshaug, E.P., Dong, T., Spiller, R., Nagle, N., Pienkos, P.T., 2018. Pretreatment and fermentation of salt-water grown algal biomass as a feedstock for biofuels and high-value biochemicals. *Algal Res.* 36, 239–248. <https://doi.org/10.1016/j.algal.2018.10.024>.
54. Kratzer, R., Murkovic, M., 2021. Food ingredients and nutraceuticals from microalgae: main product classes and biotechnological production. *Foods* 10, 1626. <https://doi.org/10.3390/foods10071626>.
55. Kubisch, C., Ochsenreither, K., 2022. Detoxification of a pyrolytic aqueous condensate from wheat straw for utilization as substrate in *Aspergillus oryzae* DSM 1863 cultivations. *Biotechnol. Biofuels Bioprod.* 15, 18. <https://doi.org/10.1186/s13068-022-02115-z>.
56. Kumar, A.K., Sharma, S., 2017. Recent updates on different methods of pretreatment of lignocellulosic feedstocks: a review. *Bioresour. Bioprocess.* 4, 7. <https://doi.org/10.1186/s40643-017-0137-9>.
57. Kumar, D., Eswari, A.P., Park, J.-H., Adishkumar, S., Banu, J.R., 2019. Biohydrogen generation from macroalgal biomass, chaetomorpha antennina through surfactant aided microwave disintegration. *Front. Energy Res.* 7. <https://doi.org/10.3389/fenrg.2019.00078>.

58. Kumar, M., Sundaram, S., Gnansounou, E., Larroche, C., Thakur, I.S., 2018. Carbon dioxide capture, storage and production of biofuel and biomaterials by bacteria: A review. *Bioresour. Technol.* 247, 1059–1068. <https://doi.org/10.1016/j.biortech.2017.09.050>.
59. Kumar, M.D., Tamilarasan, K., Kaliappan, S., Banu, J.R., Rajkumar, M., Kim, S.H., 2018. Surfactant assisted disperser pretreatment on the liquefaction of *Ulva reticulata* and evaluation of biodegradability for energy efficient biofuel production through nonlinear regression modelling. *Bioresour. Technol.* 255, 116–122. <https://doi.org/10.1016/j.biortech.2018.01.116>.
60. Laurens, L.M.L., Nagle, N., Davis, R., Sweeney, N., Wychen, S.V., Lowell, A., Pienkos, P.T., 2015. Acid-catalyzed algal biomass pretreatment for integrated lipid and carbohydrate-based biofuels production. *Green Chem.* 17, 1145–1158. <https://doi.org/10.1039/C4GC01612B>.
61. Lee, H.-J., Kim, S.-G., Cho, D.-H., Bhatia, S.K., Gurav, R., Yang, S.-Y., Yang, J., Jeon, J.-M., Yoon, J.-J., Choi, K.-Y., Yang, Y.-H. 2022. Finding of novel lactate utilizing *Bacillus* sp. YHY22 and its evaluation for polyhydroxybutyrate (PHB) production. *Int. J. Biol. Macromole.* 201, 653–661. <https://doi.org/10.1016/j.ijbiomac.2022.01.025>.
62. Lee, S.-M., Lee, J.-H., 2012. Ethanol fermentation for main sugar components of brown-algae using various yeasts. *J. Ind. Eng. Chem.* 18, 16–18. <https://doi.org/10.1016/j.jiec.2011.11.097>.
63. Li, K., Liu, S., Liu, X., 2014. An overview of algae bioethanol production. *Int. J. Energy Res.* 38, 965–977. <https://doi.org/10.1002/er.3164>.
64. Lin, H.-T.V., Huang, M.-Y., Kao, T.-Y., Lu, W.-J., Lin, H.-J., Pan, C.-L., 2020. Production of lactic acid from seaweed hydrolysates via lactic acid bacteria fermentation. *Fermentation* 6, 37. <https://doi.org/10.3390/fermentation6010037>.

65. Liu, H., Kumar, V., Jia, L., Sarsaiya, S., Kumar, D., Juneja, A., Zhang, Z., Sindhu, R., Binod, P., Bhatia, S.K., Awasthi, M.K. 2021. Biopolymer poly-hydroxyalkanoates (PHA) production from apple industrial waste residues: A review. *Chemosphere*, 284, 131427. <https://doi.org/10.1016/j.chemosphere.2021.131427>.
66. Liu, T., Awasthi, S.K., Duan, Y., Pandey, A., Zhang, Z., Awasthi, M.K., 2021. Current status of global warming potential reduction by cleaner composting. *Energy Environ.* 32, 1002–1028. <https://doi.org/10.1177/0958305X19882417>
67. Maceiras, R., Alfonsín, V., Seguí, L., González, J.F., 2021. Microwave assisted alkaline pretreatment of algae waste in the production of cellulosic bioethanol. *Energies* 14, 5891. <https://doi.org/10.3390/en14185891>.
68. Mahdy, A., Ballesteros, M., González-Fernández, C., 2016. Enzymatic pretreatment of *Chlorella vulgaris* for biogas production: Influence of urban wastewater as a sole nutrient source on macromolecular profile and biocatalyst efficiency. *Bioresour. Technol.* 199, 319–325. <https://doi.org/10.1016/j.biortech.2015.08.080>.
69. Maia-20389119, 2022. Market Research Guru - Global Industry Research Reports Analysis. Market Research Guru. <https://www.marketresearchguru.com>. (Accessed on 13032022).
70. Maleki, N., Safari, M., Eiteman, M.A., 2018. Conversion of glucose-xylose mixtures to pyruvate using a consortium of metabolically engineered *Escherichia coli*. *Eng. Life Sci.* 18, 40–47. <https://doi.org/10.1002/elsc.201700109>.
71. Marinho, G.S., Alvarado-Morales, M., Angelidaki, I., 2016. Valorization of macroalga *Saccharina latissima* as novel feedstock for fermentation-based succinic acid production in a biorefinery approach and economic aspects. *Algal Res.* 16, 102–109. <https://doi.org/10.1016/j.algal.2016.02.023>.

- 658 72. Marta, K., Paulina, R., Magda, D., Anna, N., Aleksandra, K., Marcin, D., Kazimierowicz,
 659 J., Marcin, Z., 2020. Evaluation of ultrasound pretreatment for enhanced anaerobic
 660 digestion of *Sida hermaphrodita*. BioEnergy Res. 13, 824–832.
 661 <https://doi.org/10.1007/s12155-020-10108-9>.
- 662 73. Mathimani, T., Pugazhendhi, A., 2019. Utilization of algae for biofuel, bio-products and
 663 bio-remediation. Biocatal. Agric. Biotechnol. 17, 326–330.
 664 <https://doi.org/10.1016/j.bcab.2018.12.007>.
- 665 74. Maurya, D.P., Singla, A., Negi, S., 2015. An overview of key pretreatment processes for
 666 biological conversion of lignocellulosic biomass to bioethanol. 3 Biotech 5, 597–609.
 667 <https://doi.org/10.1007/s13205-015-0279-4>.
- 668 75. Mehariya, S., Goswami, R.K., Karthikeysan, O.P., Verma, P., 2021. Microalgae for high-
 669 value products: A way towards green nutraceutical and pharmaceutical compounds.
 670 Chemosphere 280, 130553. <https://doi.org/10.1016/j.chemosphere.2021.130553>.
- 671 76. Michalak, I., Górka, B., Wieczorek, P.P., Rój, E., Lipok, J., Łęska, B., Messyasz, B., Wilk,
 672 R., Schroeder, G., Dobrzyńska-Inger, A., Chojnacka, K., 2016. Supercritical fluid
 673 extraction of algae enhances levels of biologically active compounds promoting plant
 674 growth. Eur. J. Phycol. 51, 243–252. <https://doi.org/10.1080/09670262.2015.1134813>.
- 675 77. Monjed, M.K., Achour, B., Robson, G.D., Pittman, J.K., 2021. Improved saccharification
 676 of *Chlorella vulgaris* biomass by fungal secreted enzymes for bioethanol production. Algal
 677 Res. 58, 102402. <https://doi.org/10.1016/j.algal.2021.102402>.
- 678 78. Monlau, F., Suarez-Alvarez, S., Lallement, A., Vaca-Medina, G., Giacinti, G., Munarriz,
 679 M., Urreta, I., Raynaud, C., Ferrer, C., Castañón, S., 2021. A cascade biorefinery for the
 680 valorization of microalgal biomass: biodiesel, biogas, fertilizers and high valuable
 681 compounds. Algal Res. 59, 102433. <https://doi.org/10.1016/j.algal.2021.102433>.

- 682 79. Muhammad, M., Aloui, H., Khomlaem, C., Hou, C.T., Kim, B.S., 2020. Production of
 683 polyhydroxyalkanoates and carotenoids through cultivation of different bacterial strains
 684 using brown algae hydrolysate as a carbon source. *Biocatal. Agric. Biotechnol.* 30, 101852.
 685 <https://doi.org/10.1016/j.bcab.2020.101852>.
- 686 80. Nagarajan, D., Dong, C.-D., Chen, C.-Y., Lee, D.-J., Chang, J.-S., 2021. Biohydrogen
 687 production from microalgae—Major bottlenecks and future research perspectives.
 688 *Biotechnol. J.* 16, 2000124. <https://doi.org/10.1002/biot.202000124>.
- 689 81. Nagarajan, D., Oktarina, N., Chen, P.-T., Chen, C.-Y., Lee, D.-J., Chang, J.-S., 2022.
 690 Fermentative lactic acid production from seaweed hydrolysate using *Lactobacillus* sp. And
 691 *Weissella* sp. *Bioresour. Technol.* 344, 126166.
 692 <https://doi.org/10.1016/j.biortech.2021.126166>.
- 693 82. Nanda, S., Mohammad, J., Reddy, S.N., Kozinski, J.A., Dalai, A.K., 2014. Pathways of
 694 lignocellulosic biomass conversion to renewable fuels. *Biomass Convers. Biorefinery* 4,
 695 157–191. <https://doi.org/10.1007/s13399-013-0097-z>.
- 696 83. Naresh Kumar, A., Chatterjee, S., Hemalatha, M., Althuri, A., Min, B., Kim, S.-H.,
 697 Venkata Mohan, S., 2020. Deoiled algal biomass derived renewable sugars for bioethanol
 698 and biopolymer production in biorefinery framework. *Bioresour. Technol.* 296, 122315.
 699 <https://doi.org/10.1016/j.biortech.2019.122315>.
- 700 84. Nazari, L., Sarathy, S., Santoro, D., Ho, D., Ray, M.B., Xu, C. (Charles), 2018. 3 - Recent
 701 advances in energy recovery from wastewater sludge, in: Rosendahl, L. (Ed.), *Direct*
 702 *Thermochemical Liquefaction for Energy Applications*. Woodhead Publishing, pp. 67–100.
 703 <https://doi.org/10.1016/B978-0-08-101029-7.00011-4>.
- 704 85. Noreen, A., Zia, K.M., Zuber, M., Ali, M., Mujahid, M., 2016. A critical review of algal
 705 biomass: A versatile platform of bio-based polyesters from renewable resources. *Int. J.*
 706 *Biol. Macromol.* 86, 937–949. <https://doi.org/10.1016/j.ijbiomac.2016.01.067>.

86. Onyeaka, H., Miri, T., Obileke, K., Hart, A., Anumudu, C., Al-Sharif, Z.T., 2021. Minimizing carbon footprint via microalgae as a biological capture. *Carbon Capture Sci. Technol.* 1, 100007. <https://doi.org/10.1016/j.ccs.2021.100007>.
87. Overbeck, T., Steele, J.L., Broadbent, J.R., 2016. Fermentation of de-oiled algal biomass by *Lactobacillus casei* for production of lactic acid. *Bioprocess Biosyst. Eng.* 39, 1817–1823. <https://doi.org/10.1007/s00449-016-1656-z>.
88. Park, J.H., Choi, M.A., Kim, Y.J., Kim, Y.-C., Chang, Y.K., Jeong, K.J., 2017. Engineering of *Klebsiella oxytoca* for production of 2,3-butanediol via simultaneous utilization of sugars from a *Golenkinia* sp. hydrolysate. *Bioresour. Technol.* 245, 1386–1392. <https://doi.org/10.1016/j.biortech.2017.05.111>.
89. Passos, F., Uggetti, E., Carrère, H., Ferrer, I., 2015. Chapter 11 - Algal Biomass: Physical Pretreatments, in: Pandey, A., Negi, S., Binod, P., Larroche, C. (Eds.), *Pretreatment of Biomass*. Elsevier, Amsterdam, pp. 195–226. <https://doi.org/10.1016/B978-0-12-800080-9.00011-6>.
90. Patel, A.K., Vadrade, A.P., Tseng, Y.-S., Chen, C.-W., Dong, C.-D., Singhania, R.R., 2022. Bioprospecting of marine microalgae from *Kaohsiung Seacoast* for lutein and lipid production. *Bioresour. Technol.* 351, 126928. <https://doi.org/10.1016/j.biortech.2022.126928>.
91. Patel, S., Kannan, D.C., 2021. A method of wet algal lipid recovery for biofuel production. *Algal Res.* 55, 102237. <https://doi.org/10.1016/j.algal.2021.102237>.
92. Pendyala, B., Hanifzadeh, M., Abel, G.A., Viamajala, S., Varanasi, S., 2020. Production of organic acids via autofermentation of microalgae: a promising approach for sustainable algal biorefineries. *Ind. Eng. Chem. Res.* 59, 1772–1780. <https://doi.org/10.1021/acs.iecr.9b05493>.

93. Peral, C., 2016. Chapter 5 - Biomass Pretreatment Strategies (Technologies, Environmental Performance, Economic Considerations, Industrial Implementation), in: Poltronieri, P., D'Urso, O.F. (Eds.), *Biotransformation of Agricultural Waste and By-Products*. Elsevier, pp. 125–160. <https://doi.org/10.1016/B978-0-12-803622-8.00005-7>.
94. Phwan, C.K., Chew, K.W., Sebayang, A.H., Ong, H.C., Ling, T.C., Malek, M.A., Ho, Y.-C., Show, P.L., 2019. Effects of acids pre-treatment on the microbial fermentation process for bioethanol production from microalgae. *Biotechnol. Biofuels* 12, 191. <https://doi.org/10.1186/s13068-019-1533-5>.
95. Priecel, P., Lopez-Sanchez, J.A., 2019. Advantages and limitations of microwave reactors: from chemical synthesis to the catalytic valorization of biobased chemicals. *ACS Sustain. Chem. Eng.* 7, 3–21. <https://doi.org/10.1021/acssuschemeng.8b03286>.
96. Puligundla, P., Oh, S.-E., Mok, C., 2016. Microwave-assisted pretreatment technologies for the conversion of lignocellulosic biomass to sugars and ethanol: a review. *Carbon Lett.* 17, 1–10. <https://doi.org/10.5714/CL.2016.17.1.001>.
97. Q. To, T., Procter, K., A. Simmons, B., Subashchandrabose, S., Atkin, R., 2018. Low cost ionic liquid–water mixtures for effective extraction of carbohydrate and lipid from algae. *Faraday Discuss.* 206, 93–112. <https://doi.org/10.1039/C7FD00158D>.
98. QYR17046401, 2022. Global Diatomaceous Earth Market Research Report 2022 (Survey report No. QYR17046401). QY Research Group. <https://www.marketresearch.com/QYResearch-Group-v3531/Global-Diatomaceous-Earth-Research-31074772/>. (Accessed on 14032022).
99. QYR-18331892, 2021. Global Agarose Industry Research Report, Growth Trends and Competitive Analysis 2021-2027. 360 Research Reports. <https://www.infinitybusinessinsights.com/reports/global-agar-agar-market-research-report-growth-trends-and-competitive-analysis-2021-2027--793084>. (Accessed on 17032022).

100. Ra, C.H., Jeong, G.-T., Kim, S.-K., 2017. Hyper-thermal acid hydrolysis and adsorption treatment of red seaweed, *Gelidium amansii* for butyric acid production with pH control. *Bioprocess Biosyst. Eng.* 40, 403–411. <https://doi.org/10.1007/s00449-016-1708-4>
101. Rajesh Banu, J., Preethi, Kavitha, S., Gunasekaran, M., Kumar, G., 2020. Microalgae based biorefinery promoting circular bioeconomy-techno economic and life-cycle analysis. *Bioresour. Technol.* 302, 122822. <https://doi.org/10.1016/j.biortech.2020.122822>.
102. Ramesh, T., Kalaiselvam, M., 2011. An experimental study on citric acid production by *aspergillus niger* using *gelidiella acerosa* as a substrate. *Indian J. Microbiol.* 51, 289–293. <https://doi.org/10.1007/s12088-011-0066-9>.
103. Ramos-Suárez, J.L., Carreras, N., 2014. Use of microalgae residues for biogas production. *Chem. Eng. J.* 242, 86–95. <https://doi.org/10.1016/j.cej.2013.12.053>
104. Rasapoor, M., Adl, M., Baroutian, S., Iranshahi, Z., Pazouki, M., 2019. Energy performance evaluation of ultrasonic pretreatment of organic solid waste in a pilot-scale digester. *Ultrason. Sonochem.* 51, 517–525. <https://doi.org/10.1016/j.ultsonch.2018.04.021>
105. Rasool, T., Najar, I., Srivastava, V.C., Pandey, A., 2021. Pyrolysis of almond (*Prunus amygdalus*) shells: Kinetic analysis, modelling, energy assessment and technical feasibility studies. *Bioresour. Technol.* 337, 125466. <https://doi.org/10.1016/j.biortech.2021.125466>.
106. Rebello, S., Anoopkumar, A.N., Aneesh, E.M., Sindhu, R., Binod, P., Pandey, A., 2020. Sustainability and life cycle assessments of lignocellulosic and algal pretreatments. *Bioresour. Technol.* 301, 122678. <https://doi.org/10.1016/j.biortech.2019.122678>.
107. Reddy, P., 2015. A critical review of ionic liquids for the pretreatment of lignocellulosic biomass. *South Afr. J. Sci.* 111, 1–9. <https://doi.org/10.17159/sajs.2015/20150083>.
108. Rehman, Z.U., Anal, A.K., 2018. Enhanced lipid and starch productivity of microalga (*Chlorococcum* sp. TISTR 8583) with nitrogen limitation following effective pretreatments

- for biofuel production. *Biotechnol. Rep.* 21, e00298.
<https://doi.org/10.1016/j.btre.2018.e00298>.
109. Rout, P.R., Goel, M., Mohanty, A., Pandey, D.S., Halder, N., Mukherjee, S., Bhatia, S.K., Sahoo, N.K., Varjani, S., 2022. Recent advancements in microalgal mediated valorisation of wastewater from hydrothermal liquefaction of biomass. *BioEnergy Res.* <https://doi.org/10.1007/s12155-022-10421-5>.
110. Saengsawang, B., Bhuyar, P., Manmai, N., Ponnusamy, V.K., Ramaraj, R., Unpaprom, Y., 2020. The optimization of oil extraction from macroalgae, *Rhizoclonium* sp. by chemical methods for efficient conversion into biodiesel. *Fuel* 274, 117841. <https://doi.org/10.1016/j.fuel.2020.117841>.
111. Sambusiti, C., Bellucci, M., Zabaniotou, A., Beneduce, L., Monlau, F., 2015. Algae as promising feedstocks for fermentative biohydrogen production according to a biorefinery approach: A comprehensive review. *Renew. Sustain. Energy Rev.* 44, 20–36. <https://doi.org/10.1016/j.rser.2014.12.013>.
112. Sindhu, R., Binod, P., Pandey, A., 2016. Biological pretreatment of lignocellulosic biomass – An overview. *Bioresour. Technol., Pretreatment of Biomass* 199, 76–82. <https://doi.org/10.1016/j.biortech.2015.08.030>.
113. Singh, H., Tomar, S., Qureshi, K.A., Jaremko, M., Rai, P.K., 2022. Recent advances in biomass pretreatment technologies for biohydrogen production. *Energies* 15, 999. <https://doi.org/10.3390/en15030999>.
114. Soquetta, M.B., Terra, L. de M., Bastos, C.P., 2018. Green technologies for the extraction of bioactive compounds in fruits and vegetables. *CyTA - J. Food* 16, 400–412. <https://doi.org/10.1080/19476337.2017.1411978>.
115. Sorokina, K.N., Samoylova, Y.V., Gromov, N.V., Ogorodnikova, O.L., Parmon, V.N., 2020. Production of biodiesel and succinic acid from the biomass of the microalga

- 805 *Micractinium* sp. IC-44. Bioresour. Technol. 317, 124026.
 806 <https://doi.org/10.1016/j.biortech.2020.124026>.
- 807 116. Taherzadeh, M., Parameswaran, B., Karimi, K., de Souza Vandenberghe, L.P., Kumar
 808 Patel, A., 2020. Recent advances on pretreatment of lignocellulosic and algal biomass.
 809 Bioresour. Technol. 316, 123957. <https://doi.org/10.1016/j.biortech.2020.123957>.
- 810 117. Travaini, R., Marangon-Jardim, C., Colodette, J.L., Morales-Otero, M., Bolado-Rodríguez,
 811 S., 2015. Chapter 7 - Ozonolysis, in: Pandey, A., Negi, S., Binod, P., Larroche, C. (Eds.),
 812 Pretreatment of Biomass. Elsevier, Amsterdam, pp. 105–135.
 813 <https://doi.org/10.1016/B978-0-12-800080-9.00007-4>.
- 814 118. Travaini, R., Martín-Juárez, J., Lorenzo-Hernando, A., Bolado-Rodríguez, S., 2016.
 815 Ozonolysis: An advantageous pretreatment for lignocellulosic biomass revisited. Bioresour.
 816 Technol. 199, 2–12. <https://doi.org/10.1016/j.biortech.2015.08.143>.
- 817 119. Trivedi, J., Aila, M., Bangwal, D.P., Kaul, S., Garg, M.O., 2015. Algae based biorefinery—
 818 How to make sense? Renew. Sustain. Energy Rev. 47, 295–307.
 819 <https://doi.org/10.1016/j.rser.2015.03.052>
- 820 120. Uma, V.S., Usmani, Z., Sharma, Minaxi, Diwan, D., Sharma, Monika, Guo, M., Tuohy,
 821 M.G., Makatsoris, C., Zhao, X., Thakur, V.K., Gupta, V.K., 2022. Valorisation of algal
 822 biomass to value-added metabolites: emerging trends and opportunities. Phytochem. Rev.
 823 <https://doi.org/10.1007/s11101-022-09805-4>.
- 824 121. Usmanbaha, N., Jariyaboon, R., Reungsang, A., Kongjan, P., Chu, C.-Y., 2019.
 825 Optimization of batch dark fermentation of *chlorella* sp. using mixed-cultures for
 826 simultaneous hydrogen and butyric acid production. Energies 12, 2529.
 827 <https://doi.org/10.3390/en12132529>.

- 828 122. Vassilev, S.V., Vassileva, C.G., 2016. Composition, properties and challenges of algae
829 biomass for biofuel application: An overview. *Fuel* 181, 1–33.
830 <https://doi.org/10.1016/j.fuel.2016.04.106>.
- 831 123. Viswanathan, B., 2017. Chapter 15 - Biochemical Routes for Energy Conversion, in:
832 Viswanathan, B. (Ed.), *Energy Sources*. Elsevier, Amsterdam, pp. 357–368.
833 <https://doi.org/10.1016/B978-0-444-56353-8.00015-0>.
- 834 124. Wang, Q., Sun, J., Liu, S., Gao, L., Zhou, X., Wang, D., Song, K., Nghiem, L.D., 2019.
835 Free ammonia pretreatment improves anaerobic methane generation from algae. *Water*
836 *Res.* 162, 269–275. <https://doi.org/10.1016/j.watres.2019.06.065>.
- 837 125. Wang, Y., Guo, W., Cheng, C.-L., Ho, S.-H., Chang, J.-S., Ren, N., 2016. Enhancing bio-
838 butanol production from biomass of *Chlorella vulgaris* JSC-6 with sequential alkali
839 pretreatment and acid hydrolysis. *Bioresour. Technol.* 200, 557–564.
840 <https://doi.org/10.1016/j.biortech.2015.10.056>.
- 841 126. Weldemhret, T.G., Nisola, G.M., Valdehuesa, K.N.G., Lee, W.-K., Ramos, K.R.M.,
842 Chung, W.-J., 2019. Ionic liquid pretreatment in tandem with recombinant agarase cocktail
843 saccharification of *gelidium amansii* for D -galactose and 3,6-anhydro- L -galactose
844 production. *acs sustain. Chem. Eng.* 7, 7563–7571.
845 <https://doi.org/10.1021/acssuschemeng.8b05761>.
- 846 127. Wu, W., Lei, Y.-C., Chang, J.-S., 2019. Life cycle assessment of upgraded microalgae-to-
847 biofuel chains. *Bioresour. Technol.* 288, 121492.
848 <https://doi.org/10.1016/j.biortech.2019.121492>.
- 849 128. Xia, A., Jacob, A., Tabassum, M.R., Herrmann, C., Murphy, J.D., 2016. Production of
850 hydrogen, ethanol and volatile fatty acids through co-fermentation of macro- and micro-
851 algae. *Bioresour. Technol.* 205, 118–125. <https://doi.org/10.1016/j.biortech.2016.01.025>.

129. Yin, Y., Hu, J., Wang, J., 2019. Fermentative hydrogen production from macroalgae *Laminaria japonica* pretreated by microwave irradiation. *Int. J. Hydrog. Energy* 44, 10398–10406. <https://doi.org/10.1016/j.ijhydene.2019.03.034>.
130. Youssef, N.H., Farag, I.F., Rinke, C., Hallam, S.J., Woyke, T., Elshahed, M.S., 2015. In silico analysis of the metabolic potential and niche specialization of candidate phylum “Latescibacteria” (WS3). *PLOS ONE* 10, e0127499. <https://doi.org/10.1371/journal.pone.0127499>.
131. Yuan, Y., Macquarrie, D.J., 2015. Microwave assisted acid hydrolysis of brown seaweed *ascophyllum nodosum* for bioethanol production and characterization of alga residue. *ACS Sustain. Chem. Eng.* 3, 1359–1365. <https://doi.org/10.1021/acssuschemeng.5b00094>.
132. Zhang, K., Zhang, F., Wu, Y.-R., 2021. Emerging technologies for conversion of sustainable algal biomass into value-added products: A state-of-the-art review. *Sci. Total Environ.* 784, 147024. <https://doi.org/10.1016/j.scitotenv.2021.147024>.
133. Zhang, Z., 2021. Chapter 5 - Waste pretreatment technologies for hydrogen production, in: Zhang, Q., He, C., Ren, J., Goodsite, M. (Eds.), *Waste to Renewable Biohydrogen*. Academic Press, pp. 109–122. <https://doi.org/10.1016/B978-0-12-821659-0.00004-6>.
134. Zhou, W., Cheng, Y., Li, Y., Wan, Y., Liu, Y., Lin, X., Ruan, R., 2012. Novel fungal pelletization-assisted technology for algae harvesting and wastewater treatment. *Appl. Biochem. Biotechnol.* 167, 214–228. <https://doi.org/10.1007/s12010-012-9667-y>.
135. Zhou, W., Wang, Z., Alam, M.A., Xu, J., Zhu, S., Yuan, Z., Huo, S., Guo, Y., Qin, L., Ma, L., 2019. Repeated utilization of ionic liquid to extract lipid from algal biomass. *Int. J. Polym. Sci.* 2019, e9209210. <https://doi.org/10.1155/2019/9209210>
136. Zhou, Y., Liu, L., Li, M., Hu, C., 2022. Algal biomass valorisation to high-value chemicals and bioproducts: Recent advances, opportunities and challenges. *Bioresour. Technol.* 344, 126371. <https://doi.org/10.1016/j.biortech.2021.126371>.

877 Table. 1 Commercial market demand of various algal products.

Algal products	Organisms	Product name/Brand	Manufacture/s	Application	Market demand	References
Diatomaceous earth	Diatoms	Charcoal white	Coalgate India	Personal Care		
		Nature's Whitening toothpaste	Cali white USA	Personal Care		
		Detoxifying Sea Algae Mask	Prolixr Global Bees India	Cosmetic	US\$ 1048.46 million	(QYR17046401, 2022)
		Daily microfoliant face scrub	Dermalogica USA	Cosmetic		
		Filter Press	Dutch Filtration Netherlands	Filtration system		
		Celpure	ErtelAlsop USA	Filtration system		
		Astaxanthin	Now Bloomingdale	Food Healthcare		
Astaxanthin	<i>Haematococcus pluvialis</i>	Himalayan Organics	Vlado Sky	Healthcare		
		Naturally Sourced Astaxanthin	Enterprises India		US\$ 647 million	(FB 5254, 2021)
		Astaxanthin Collagen Gel	All-In-One DHC Japan	Cosmetic		
		Astaxanthin & Bilberry	Oriflame	Healthcare		

			Extract						
			Acai Clarifying Wash – Clear	UltraLuxe USA			Cosmetic		
Fatty acids, DHA, PUFA	<i>Schizochytrium</i> sp.	Ovegha		Unived India			Healthcare	US\$ 1.86 billion	(IMARC, 2022)
Whole biomass	<i>Spirulina platensis</i>	Spirulina capsule		Sunova Organic India			Healthcare	US\$ 393.6 million	(A03875, 2021)
			Acigon	Sanofi Pharma India			Aventis GERD, acidity	US\$ 343 billion	(Maia-20389119, 2022)
Alginates	Sargassum	Alginate salt		Qingdao Biology Development Co.,Ltd. China			Hyzlin Thickening agent		
Carrageenans	<i>Eucheuma cottonii</i>	Carrageenans		FoodChem China			Thickening agent	US\$ 761.2 millions	(Global Carrageenan Market Research Report 2020)
Agarose	Red seaweed	SeaKem		Lonza Switzerland			Base gel preparation	US\$ 101.9 million	(QYR-18331892, 2021)

879 **Table. 2 Advantages and disadvantages of biomass pretreatment methods.**

Treatment method	Merits	Demerits	References
Microwave assisted treatment	<ul style="list-style-type: none"> • Rapid and high rate of localized heating • Excellent control of the operation 	<ul style="list-style-type: none"> • Overheating and uneven distribution of heat in the sample • High cost of operation and energy intensive 	(Priecel and Lopez-Sanchez, 2019)
Ultrasonication	<ul style="list-style-type: none"> • Economical and clean technology with the least use of solvent • Can transfer high energy rapidly 	<ul style="list-style-type: none"> • Heat transfer is not uniform • Low yield and scale-up is a big challenge • Not suitable for complex substrate 	(Carreira-Casais et al., 2021)
Acid hydrolysis	<ul style="list-style-type: none"> • Effective in the hydrolysis of cellulose • Efficiency can be improved when operated with a steam blast and easy to scale up 	<ul style="list-style-type: none"> • Generated inhibitors like HMF, furfurals, and phenolics • High concentrations can be corrosive 	(Nazari et al., 2018)
Alkali treatment	<ul style="list-style-type: none"> • Alkali act on lignin from the biomass • Easy scale up • Hydrolysis of de-lignified biomass offered higher sugar recovery 	<ul style="list-style-type: none"> • High concentrations can be corrosive • Recovery of alkali is not possible • Also extract the hemicellulose fraction • At higher pH, bio-molecules undergo decarboxylation rather than dehydration 	(Bhatia et al., 2020)
Ozonation	<ul style="list-style-type: none"> • Remove lignin from biomass • No toxic byproducts generated 	<ul style="list-style-type: none"> • For sugar recovery, biomass must be treated further 	(Aftab et al., 2019)

	<ul style="list-style-type: none"> Operated under mild temperature and pressure 	<ul style="list-style-type: none"> High cost of operation Need a large amount of ozone 	
Ionic liquids	<ul style="list-style-type: none"> Higher dissolution rate High thermal stability Operated at low temperature 	<ul style="list-style-type: none"> Low efficiency of treatment High pollution rate Scale-up feasibility is a challenge 	(Hou et al., 2017;)
Biological method	<ul style="list-style-type: none"> Low energy operation Target specific compounds Microbes can consume sugars along with biomass hydrolysis 	<ul style="list-style-type: none"> Slow process rate hence high treatment time Not feasible for commercial applications Time consuming 	(Sindhu et al., 2016)
AFEX	<ul style="list-style-type: none"> Cost effective and simple as no liquid/water stream involved Less energy intensive, offered high yield and easy to scale 	<ul style="list-style-type: none"> Not suitable for high lignin content Requires high solid loading, pressures as well as high ammonia loadings Ammonia is toxic and its recycling is challenging 	(Peral, 2016)
CO ₂ explosion	<ul style="list-style-type: none"> Low cost of operation Non-toxicity, and non-flammability 	<ul style="list-style-type: none"> Operated at very high pressure 	(Gu et al., 2013)
Hydrothermal	<ul style="list-style-type: none"> Wet biomass can be used Effective and high rate of hydrolysis Less time consuming and easy to scale up 	<ul style="list-style-type: none"> Energy inefficient operated at high T (>400 °C) and P (>15 MPa) High nitrogen and oxygen content make products unstable 	(Chen et al., 2016)

881 Table. 3 Valorization of algal biomass into bioenergy.

Product	Algae	Pretreatment method	Microorganism used	Fermentation condition	Comments	Yield	References
Ethanol	Wastewater biomass (<i>C. dorsoventralis</i> , <i>emersonii</i> , <i>proboscideum</i> , <i>obliquus</i> , <i>Micractinium</i> sp., <i>Desmodesmus</i> sp., and <i>Chlorella</i> sp.).	algal (C. Set B: Dried biomass Set C: 1M H ₂ SO ₄ at 121 °C for 15 min followed by enzymatic treatment	<i>Clostridium phytofermentens</i> DSM1183	Batch culture	Acid treatment followed by enzymatic treatment improved the sugar recovery and ethanol yield	4.6 g/L	(Fathima et al., 2016)
	<i>Nannochloris</i>	2% H ₂ SO ₄ at 155 °C for 15 min	<i>S. cerevisiae</i> D5A	Batch culture	Salt addition has no impact on sugar utilization rates or ethanol production	0.19 g/g biomass	(Knoshaug et al., 2018)
Butanol	<i>C. vulgaris</i> JSC-6	1% NaOH followed by 3% H ₂ SO ₄	<i>Clostridium acetobutylicum</i> ATCC824	Batch culture	High nitrogen content in algal biomass suppressed the butanol production	13.1 g/L	(Wang et al., 2016)
	<i>C. vulgaris</i>	2% H ₂ SO ₄ at 121	<i>C.</i>	Batch culture	No detoxification is	8.05 g/L	(Gao et al.,

2,3 butanediol	<i>Golenkinia</i> sp.	°C for 20 min of <i>saccharobutylicum</i> defatted biomass (DSM 13864) (solvent/ ionic liquid extraction) and detoxified with L-493 resin	1.5 N H ₂ SO ₄	GalP expressing, Δ mgsA <i>Klebsiella</i> <i>oxytoca</i>	Batch culture	required for ionic liquid and solvent extracted biomass	(Acid hydrolysis) 4.99 g/L (ionic liquid)	(Park et al., 2017)
						Multisugar utilization with a faster process rate were observed compared to wild type	2.76 g/L	
Biohydrogen	<i>Ulva reticulate</i>	Acidic - hydrogen peroxide (H ₂ O ₂) induced microwave pretreatment	Digested sludge		Batch culture	Microwave improved liquefaction of biomass by thermal effect	92.5 mL H ₂ /g COD	(Dinesh Kumar et al., 2019)
	<i>Chaetomorpha antennina</i>	surfactants (ammonium dodecyl sulfate— ADS) aided microwave	Methanogenic bacteria		Batch culture	The addition of surfactant improves the solubilization of organic matter during microwave treatment	74.5 mL/g COD	(Kumar et al., 2019)

	<i>U. reticulata</i>	disintegration Chemo-mechanical pretreatment (CMP)	Methanogens	Batch culture	Extraction of volatile fatty acids was almost double than MP only and thus better for bio-H ₂ production	63 mL/g COD	(M. D. Kumar et al., 2018)
	<i>A. platensis</i> and <i>L. digitata</i>	Acid hydrolysis	Anaerobic sludge	Batch culture	The optimum C/N ratio was 26.2 for optimum H ₂ production	85 mL/g VS	(Xia et al., 2016)
Biomethane	<i>C. protothecoides</i>	Defatted and enzymatic hydrolyzed biomass	Anaerobic fermentative algal bacteria	Batch culture	Almost complete utilization of nutrients into multiple products including diesel, methane, and fertilizer	196 ± 4 Nm ³ CH ₄ /t VS	(Monlau et al., 2021)
	<i>N. gaditana</i>	Lipid extracted biomass under mesophilic and	Anaerobic inoculums	Batch culture	Deoiling affects the structure integrity without cell lysis and	360 mL CH ₄ /g VS	(Capson-Tojo et al., 2017)

Biogas	<i>C. protothecoides</i>	thermophilic conditions. Defatted enzymatic hydrolyzed biomass	and algal	Anaerobic fermentative bacteria	Batch culture	improve hydrolysis Almost complete utilization of nutrients and conversion into multiple products including diesel, methane, and fertilizer	1.7 ± 0.1 NL/days	(Monlau et al., 2021)
	<i>Ulva</i> sp.	Solid fermentation (SSF)	state	<i>Aspergillus fumigatus</i>	Batch culture	SSF offered a higher biogas yield than acid/alkali treatment	153 ± 3 mL CH ₄ g/Vs	(Ben Yahmed et al., 2017)

882

883


884 **Table. 4 Valorization of algal biomass into biochemicals.**

Products	Algae	Pretreatment method	Microorganism used	Fermentation condition	Comments	Yield	Product
Lactic acid	De-oiled algal cake	0.4 % (w/v) pepsin, 1200 U α -amylase, 5 U cellulase	<i>Lactobacillus casei</i>	37 °C at 200 rpm, pH 6.5 for 24 h	Triple digestion with pepsin, cellulose, and amylase improved digestion	11.17 g/L	(Overbeck et al., 2016)
	Dried <i>Gracilaria</i> sp. <i>Sargassum siliquosum</i> , and <i>U. lactuca</i>	0.4 N HCl, 121 °C for 60 min cellulase treatment	<i>Lactobacillus acidophilus</i> BCRC 10695 and <i>L. plantarum</i> BCRC 12327	30 °C for 48 h.	Agitation reduced the LA production	19.32 g/L	(Lin et al., 2020)
	<i>Ulva</i> sp.	Acid hydrolysis with H ₂ SO ₄	<i>Lactobacillus</i> sp. and <i>Weissella</i> sp	Batch culture	Lactic acid production was higher in red algae over green and brown	0.85 g/g	(Nagarajan et al., 2022)
Succinic acid (SA)	<i>S. latissima</i>	Enzymatic hydrolysis	<i>Actinobacillus succinogenes</i> 130Z	Anaerobically 37 °C at 200 rpm, pH- 6.8 up to 48h.	Seasonal variation affected the SA production from biomass	0.92 g/g	(Marinho et al., 2016)
	Defatted	Acid hydrolysis	<i>A. succinogenes</i>	Batch culture	Direct transesterification	0.67g/g	(Sorokina et

	<i>Micractinium</i> sp. IC-44	with 2% H ₂ SO ₄	130Z	150 rpm at 37 °C for 48 h	of biomass with fermentable [BMIM][HSO ₄] offered a sugar higher FAME yield	al., 2020)
	<i>Desmodesmus</i> sp.	2% H ₂ SO ₄ hydrolysed algae, heated at 155 °C for 15 min	<i>Actinobacillus succinogenes</i> ATCC130Z	37 °C at 150 rpm,	Oxalic acid used for 0.3 g/g (Knoshaug et al., 2018)	
Pyruvic acid	<i>U. reticulata</i>	0.5 M H ₂ SO ₄ , 120 °C for 90 min + 70 IU/g Viscozyme L	<i>Halomonas</i> sp. BL6	32 °C, pH- 9.0 for 72 h	Ulve hydrolysate supported microbial growth as well as pyruvate production in comparison to pure glucose	(Anh et al., 2020)
Butyric acid	<i>G. amansii</i>	180 mM H ₂ SO ₄ at 150 °C for 5 min+ 100 g/L Viscozyme L at 45 °C for 48 h at 150 rpm	<i>Clostridium acetobutylicum</i> KCTC1790	Anaerobically 37 °C at 150 rpm, pH- 6.3 for 216 h	3% AC treatment removes HMF with the least effect on sugars	(Ra et al., 2017)
	<i>Chlorella</i> sp.	Acidogenic conditions	Anaerobic mixed cultures	Anaerobically 35 °C at 150 rpm, pH- 7.0 for 150 h in	Hydrogen production was higher without endo-nutrients	(Usmanbaha et al., 2019)


batch cultures											
Carotenoid	<i>L. japonica</i>	0.3 N H ₂ SO ₄ 120 °C for 20 min	<i>Paracoccus</i> LL1	sp.	Fed culture	batch	Acid exhibited	treated high	biomass disorder	2.3 g/L	(Muhammad et al., 2020)
with ridges and fractures											
PHA	<i>L. japonica</i>	0.3N H ₂ SO ₄ 120 °C for 20 min	<i>Paracoccus</i> LL1	sp.	Fed culture	batch	Acid exhibited	treated high	biomass disorder in	4.98 g/L	(Muhammad et al., 2020)
the cell wall structure											
	<i>G. amansii</i>	94 mM treated with H ₂ SO ₄	<i>Bacillus</i> <i>megaterium</i> KCTC2194		pH Batch culture	stat Fed	No hydrolysis	need or	of enzymatic inhibitor	8.2 g/L	(Alkotaini et al., 2016)
removal.											
Algal biodiesel waste residue	-	-	<i>Halomonas</i> <i>daqingensis</i>		Batch culture		Thermal temperature	degradation 290 °C		0.236 g/L	(Dubey and Mishra, 2021)

886 **Fig. 1 Schematic presentation of algal biomass pretreatment and product production.**

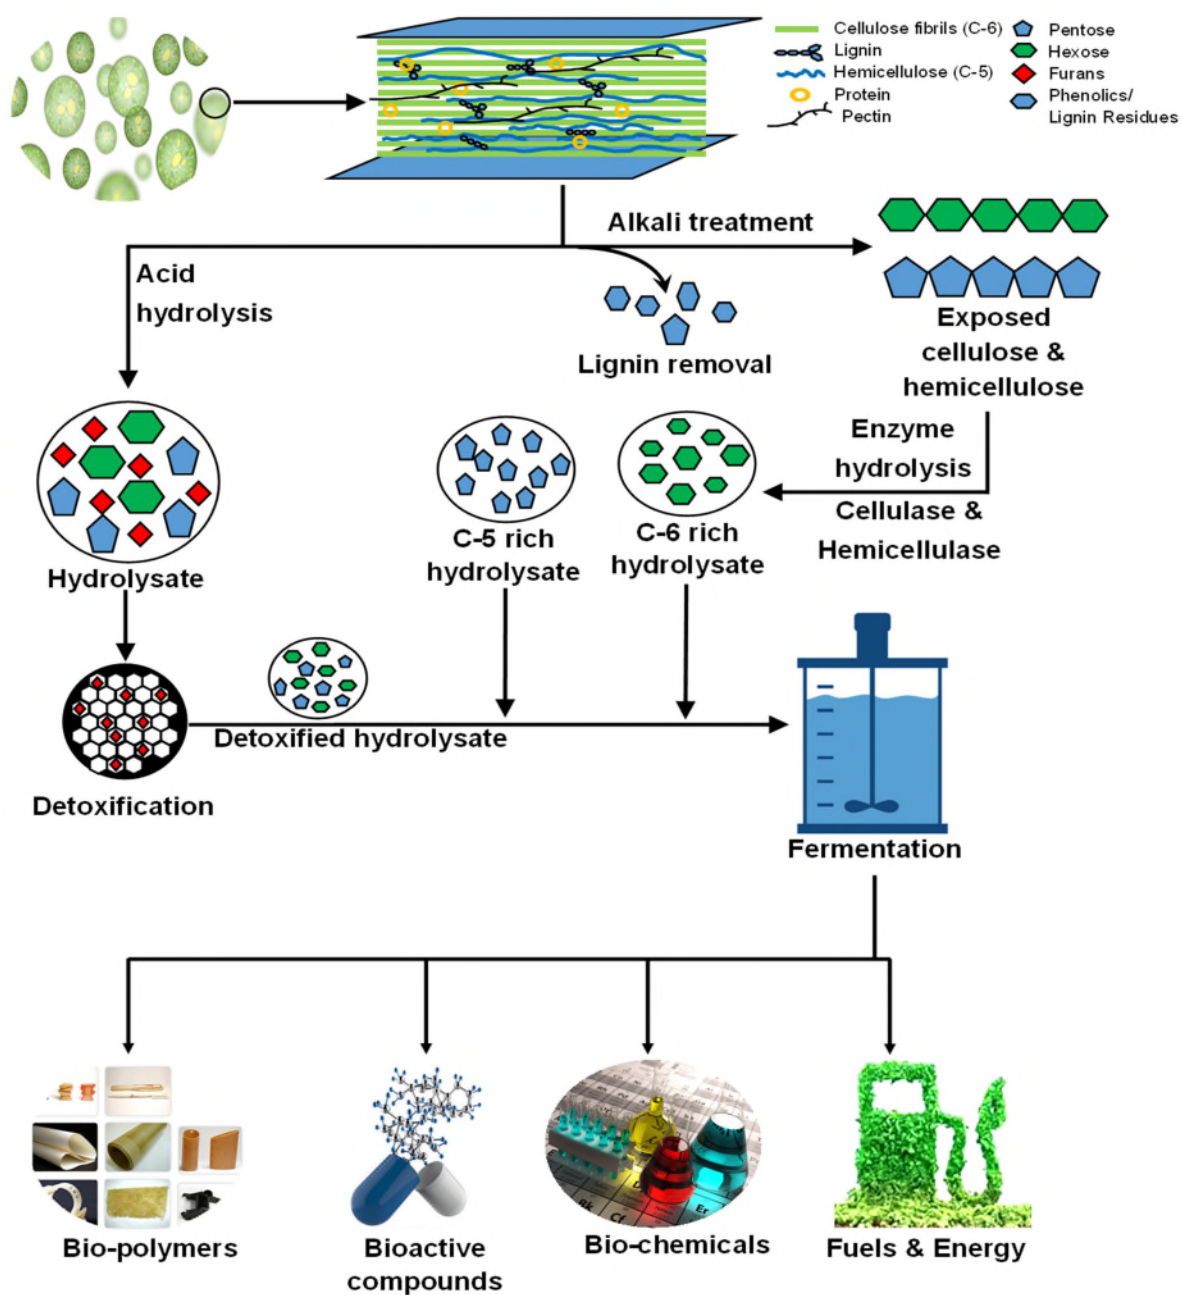

887

888

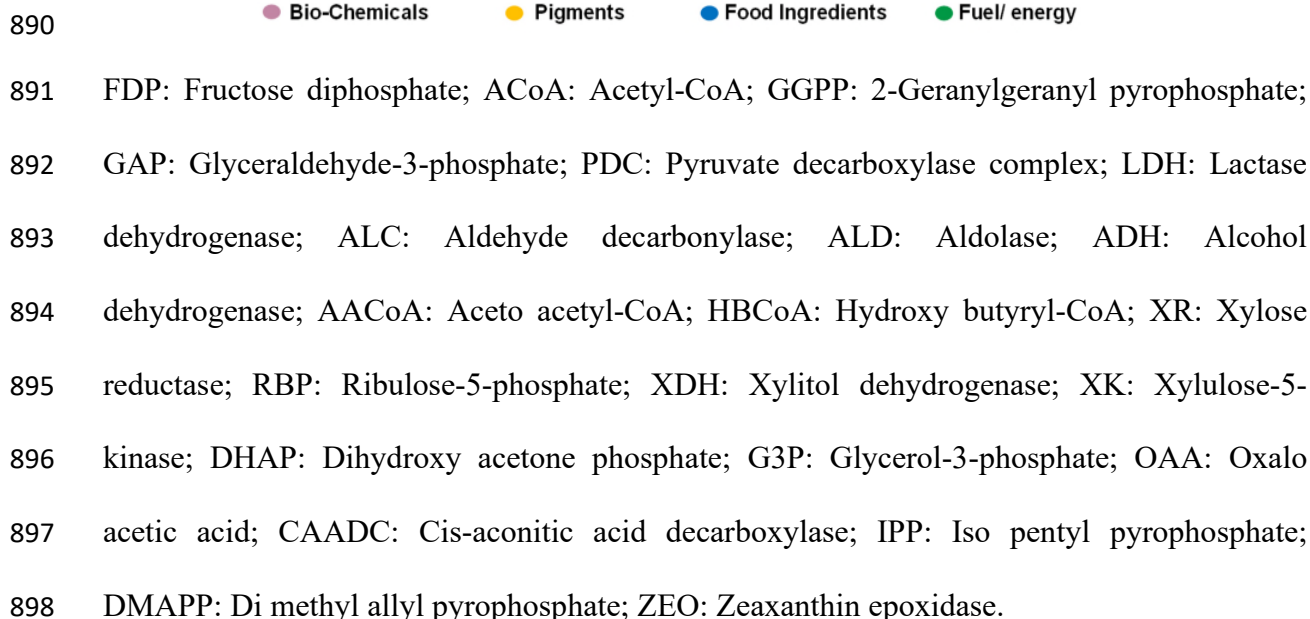

891 FDP: Fructose diphosphate; ACoA: Acetyl-CoA; GGPP: 2-Geranylgeranyl pyrophosphate;
892 GAP: Glyceraldehyde-3-phosphate; PDC: Pyruvate decarboxylase complex; LDH: Lactase
893 dehydrogenase; ALC: Aldehyde decarbonylase; ALD: Aldolase; ADH: Alcohol
894 dehydrogenase; AACoA: Aceto acetyl-CoA; HBCoA: Hydroxy butyryl-CoA; XR: Xylose
895 reductase; RBP: Ribulose-5-phosphate; XDH: Xylitol dehydrogenase; XK: Xylulose-5-
896 kinase; DHAP: Dihydroxy acetone phosphate; G3P: Glycerol-3-phosphate; OAA: Oxalo
897 acetic acid; CAADC: Cis-aconitic acid decarboxylase; IPP: Iso pentyl pyrophosphate;
898 DMAPP: Di methyl allyl pyrophosphate; ZEO: Zeaxanthin epoxidase.

Credit author statement

900

901

902 **Shashi Kant Bhatia:** Conceptualization, Writing - Review & Editing. **Vishal Ahuja:**
903 Writing - Review & Editing. **Neha Chandel:** Writing - Review & Editing. **Ranjit Gurav:**
904 Writing - Original Draft. **Ravi Kant Bhatia:** Writing - Review & Editing, **Muthuswamy**
905 **Govarthanan:** Writing - Original Draft. **Vinay Kumar Tyagi:** Writing - Original Draft.
906 **Vinod Kumar:** Writing - Original Draft. **Arivalagan Pugazendhi:** Conceptualization,
907 Review & Editing, **J Rajesh Banu:** Conceptualization, Review & Editing. **Yung-Hun Yang:**
908 Conceptualization, Writing - Review & Editing.

909



DSPACE

<https://dspace.org/>

Advances in algal biomass pretreatment and its valorisation into biochemical and bioenergy by the microbial processes

Bhatia, Shashi Kant; Ahuja, Vishal; Chandel, Neha; Gurav, Ranjit; Bhatia, Ravi Kant ...

2022-06-09

Elsevier

<https://doi.org/10.1016/j.biortech.2022.127437>

Bhatia SK, Ahuja V, Chandel N, et al., (2022) Advances in algal biomass pretreatment and its valorisation into biochemical and bioenergy by the microbial processes. Bioresource Technology, Volume 358, August 2022, Article number 127437