

Towards the Design and Optimisation of Future Compact Aero-Engines: Intake/FanCowl Trade-off Investigation

Fernando Tejero^{1*}, David G. MacManus¹, Jesus Matesanz-Garcia¹,
Avery Swarthout¹ and Christopher Sheaf²

¹*School of Aerospace, Transport and Manufacturing, Cranfield University, MK43 0AL, Bedfordshire, United Kingdom*

²*Rolls-Royce plc, DE24 8BJ, Derby, United Kingdom*

**Corresponding author: f.tejero@cranfield.ac.uk*

Abstract

Purpose - Relative to in-service aero-engines, the bypass ratio of future civil architectures may increase further. If traditional design rules are applied to these new configurations and the housing components are scaled then it is expected that the overall weight, nacelle drag and the effects of aircraft integration will increase. For this reason, the next generation of civil turbofan engines may use compact nacelles to maximise the benefits from the new engine cycles. This paper presents a multi-level design and optimisation process for future civil aero-engines.

Design/methodology/approach An initial set of multi-point, multi-objective optimisations for axisymmetric configurations are carried out to identify the trade-off between intake and fanCowl bulk parameters of highlight radius and nacelle length on nacelle drag. Having identified the likely optimal part of the design space, a set of computationally expensive optimisations for 3D non-axisymmetric configurations are performed. The process includes cruise- and windmilling-type operating conditions to ensure aerodynamic robustness of the downselected configurations.

Findings - Relative to a conventional aero-engine nacelle, the developed process yielded a compact aero-engine configuration with mid-cruise drag reduction of approximately 1.6% of the nominal standard net thrust

Originality - The multi-point, multi-objective optimisation are carried out with a mixture of regression and classification functions to ensure aerodynamic robustness of the downselected configurations. The developed computational approach enables the optimisation of future civil aero-engine nacelles that target a reduction of the overall fuel consumption.

Keywords: Multi-objective optimization, UHBPR, aero-engine nacelle, robust design

Nomenclature

Abbreviations

AoA	Angle of Attack
CDI	Circumferential Distortion Index
CFD	Computational Fluid Dynamics
CST	Class Shape Transformation
GCI	Grid Convergence Index
iCST	Intuitive Class Shape Transformation
iM	increased Mach number
LHS	Latin Hypercube Sampling
MFCR	Mass Flow Capture Ratio
MOO	Multi-Objective Optimisation
NSGA-II	Non-dominated Sorting Genetic Algorithm II
OMOPSO	Optimized Multi-Objective Particle Swarm Optimization
RANS	Reynolds-Averaged Navier Stokes
UHBPR	Ultra-High Bypass Ratio

Greek Symbols

β	Boat-tail angle
θ_{scarf}	Intake scarf angle

Roman Symbols

C_D	Drag coefficient
D	Nacelle drag
f	Non-dimensional factor
F_N	Net thrust
L	Length
M	Mach number
r	radius

Subscripts


∞	Freestream
DR	Drag rise
hi	Highlight
if	Initial Forebody
int	Intake
is	Isentropic
max	Maximum radius
nac	Nacelle
ref	Reference
sep	Separation
te	Trailing Edge

1. Introduction

It is envisaged that the next generation of turbofan engines will operate at low specific thrust and large bypass ratios to enhance the overall propulsive efficiency (Daggett 2002, Daggett et al. 2003). As such, the fan diameter may increase to accommodate the specifications of the new cycles (Birch 2000, Cumpsty 2010). If traditional design rules are applied and the housing components are scaled to accommodate the larger engines, the nacelle wetted area and weight penalties might counterbalance the expected benefits from these new architectures (Goulos et al. 2021, Tejero et al. 2022). Therefore, future civil aero-engines may require compact nacelles (Marx 2015). Relative to current configurations that use normalised nacelle lengths (L_{nac}/r_{hi}) of around $L_{nac}/r_{hi} = 3.8$ (Tejero, Goulos, MacManus & Sheaf 2020), previous studies define as compact nacelle the designs with L_{nac}/r_{hi} of approximately 3.0 (Tejero, Robinson, MacManus & Sheaf 2019)

The expected trend is that intakes will have a reduced non-dimensional highlight radius (r_{hi}/r_{fan}) and length (L_{int}/r_{fan}), and it is likely that the fan cowling length (L_{nac}/r_{hi}) and trailing edge radius (r_{te}/r_{hi}) will also be reduced (Figure 1). Although non-compact intakes with large r_{hi}/r_{fan} values can meet the aerodynamic requirements for the intake range of operability, they can result in an increase in nacelle drag (Peters et al. 2015, Millot et al. 2020). On the other hand, short fan cowls with low L_{nac}/r_{hi} might lead to unfeasible intake configurations. For this new nacelle design challenge there is very limited information in the open literature and, as such, trade-off studies to quantify intake/fan cowling compactness on the nacelle drag are required.

Albert and Bestle (Albert & Bestle 2013) carried out a combined intake/fan cowling optimisation for a 2D axisymmetric configuration. The optimisation process considered cruise ($M = 0.78$) and quasi-static ($M = 0.05$) conditions, and for both operating conditions the



Other investigations considered the nacelle drag as a function of fancowl bulk pa-

rameters, e.g. L_{nac}/r_{hi} and r_{te}/r_{hi} (Figure 1), for ultra-high bypass ratio (UHBPR) aero-engine nacelles. These new engines will operate at reduced fan pressure ratio with respect to conventional architectures, and aim to reduce the engine specific fuel consumption (SFC) and improve its propulsive efficiency. Previous studies have defined UHBPR engines as powerplants with a bypass ratio above 14, and have concluded that they are a potential podded under-wing propulsion system with an expected entry-into-service year in 2035 (Bijewitz et al. 2014). Whilst previous nacelle studies are of relevance to initially identify the possible limits of the feasible design space for compact configurations, the effect of intake bulk dimensions, such as r_{hi}/r_{fan} or L_{int}/r_{fan} , were neglected. Tejero, Robinson, MacManus & Sheaf (2019) developed a multi-point, multi-objective optimisation tool for the design of UHBPR aero-engine nacelles. The method was used for a range of nacelle lengths ($2.4 < L_{nac}/r_{hi} < 3.0$) and trailing edge radii ($0.90 < r_{te}/r_{hi} < 1.0$). A set of MOOs were carried out and the effect of both parameters on nacelle drag was quantified. The process was coupled with an established industrial thrust drag book-keeping method to extract the drag (Study Group MIDA 1979). Across the design space for future civil aero-engines, the nacelle drag varied by 40%. For compact architectures with $r_{te}/r_{hi} = 0.9$, it was found that small changes on L_{nac}/r_{hi} have a large impact on mid-cruise drag. Schreiner et al. (2020) further developed the framework and considered windmilling-type conditions during the design process. The study was also based on 2D axisymmetric configurations and highlighted the larger sensitivity of compact aero-engine nacelles to off-design requirements with respect to conventional architectures. It was concluded that although the nacelle cruise drag could be reduced by about 15% by shortening the nacelle length from $L_{nac}/r_{hi} = 4.3$ to 3.1, this benefit reduced to about 10% once windmilling consideration were accounted to ensure aerodynamic robustness.

There is very limited information in the open literature about multi-point, multi-objective optimisation of 3D non-axisymmetric configurations due to the associated large computational cost. It has been a common practice to design a set of axisymmetric aerolines and combine them to generate the 3D non-axisymmetric geometry by including the intake scarf and droop angle requirements (Tejero, MacManus & Sheaf 2020) (Figure 1). However, for compact civil aero-engines in which the inherent non-linearity of transonic flow aerodynamics will arise with respect to conventional configurations, it might be required to perform 3D non-axisymmetric optimisations at an early stage of the design process. The previous studies for 3D non-axisymmetric architectures are mainly based on optimisation processes driven by low order models. Fang et al. (2016) carried out a MOO for a 3D non-axisymmetric nacelle with $L_{nac}/r_{hi} \approx 3.5$. The nacelles were defined with Class Shape Transformation (CST) curves and 20 degrees of freedom. The Non-dominated Sorting Genetic Algorithm II (NSGA-II) genetic algorithm (Deb et al. 2002) was employed for the optimisation in which a surrogate model based on the Kriging interpolation method (Simpson et al. 2001) was used to drive the process. Two different transonic conditions at $M_\infty = 0.80$ with angles of attack (AoA) of 0° and 4° were considered. Overall, for the relatively large design space considered with twenty design variables, the initial design space exploration and following generations consisted of only 32 configurations due to the large computational cost associated with the 3D RANS solutions. Relative to a baseline geometry, the method identified an optimal nacelle with

4% drag reduction at $\text{AoA} = 4^\circ$ and similar drag at $\text{AoA} = 0^\circ$. Zhong & Li (2017) investigated laminar flow for nacelle applications. The study was based on RANS with the transition SST $\gamma - Re_\theta$ model and used a Kriging interpolation surrogate model to drive the design process. It was focused on transonic conditions at $M_\infty = 0.78$ in which the 3D non-axisymmetric nacelles were defined with 18 design variables. With respect to a reference geometry, the method provided an aero-engine nacelle with a 7% larger laminar area.

This work extends the nacelle design method developed by Tejero, MacManus & Sheaf (2019, 2020), Tejero et al. (2021) for the multi-point, multi-objective optimisation of ultra high bypass ratio (UHBPR) aero-engine nacelles. The method has been extended to now also include the capability to evaluate the nacelle drag with separate-jet exhausts for UHBPR architectures. Previous studies for 3D non-axisymmetric aero-engine nacelles were usually based on single configurations with fixed parameters of L_{nac}/r_{hi} and r_{hi}/r_{fan} . Within the context of future civil aero-engines, it is required to quantify the effect of both bulk dimensions on the nacelle drag characteristics. However, this may be computationally expensive due to the large number of CFD simulations and multi-point, multi-objective optimisations required. To enable these investigations, information from quick and computationally affordable 2D axisymmetric optimisations may be used. The novelty of this paper is in the development of a multi-level, two-step process for the design of compact aero-engine nacelles. The first step is an initial design space exploration for 2D axisymmetric configurations to identify the feasible design space. A set of independent multi-point, multi-objectives optimisation are carried out for a range of intake and fan cowling bulk parameters. This study considers the effect of intake compactness (r_{hi}/r_{fan}) and fan cowling length (L_{nac}/r_{hi}) on the nacelle drag. For the second part of the process, the optimal regions of the 2D axisymmetric studies are identified and bespoke 3D non-axisymmetric MOOs are performed. The proposed optimisation method considers not only cruise-type conditions but also off-design windmilling requirements. With respect to previous work for nacelle design, the optimisation method encompasses both regression and classification metrics to ensure that the identified Pareto front configurations are aerodynamically feasible. The method is an enabling technology towards the design of future turbofan aero-engines that aim to minimise the fuel burn.

The article is structured as follows. The methodology is presented in Section 2, where describes the computational approach that includes the nacelle geometry definition, meshing details, numerical methods and validation, and optimisation settings. Section 3 summarizes the main results and discussions. It includes a series of multi-point, multi-objective optimisations for 2D axisymmetric aero-engine nacelles where the aerodynamic trade-offs on nacelle drag for the bulk-parameters of L_{nac}/r_{hi} and r_{hi}/r_{fan} are presented. Then, this is followed by a set of 3D non-axisymmetric optimisations within the proposed multi-level two-step process. Section 4 provides the main conclusions of this study.

2. Methodology

The numerical approach uses a parametric representation of the different aero-engine housing components (Christie et al. 2019) (Figure 1). The nacelle drag is evaluated with numerical simulations and extracted with an industrial thrust-drag bookkeeping method (Study Group MIDA 1979). Different conditions of the flight envelope are considered during the design process through a multi-point, multi-objective optimisation routine driven by the Optimized Multi-Objective Particle Swarm Optimization (OMOPSO) gradient-free algorithm (Sierra & C.A Coello Coello 2005, Sanchez-Moreno et al. 2022). A detailed description of the different modules were previously elaborated (Tejero, MacManus & Sheaf 2019, 2020, Tejero et al. 2021) and, as such, only a brief description is provided in this paper.

The intake (Christie et al. 2019), fan cowling (Tejero, Robinson, MacManus & Sheaf 2019) and separate-jet exhaust (Goulos et al. 2016) are defined using an intuitive Class-Shape Transformation parametrisation (Christie et al. 2017, Matesanz-Garcia et al. 2020). Each nacelle aero-line is controlled with 7 intuitive parameters: r_{hi} , L_{nac} , r_{te} , r_{if} , f_{max} , r_{max} and β_{nac} (Figure 1). Within the context of this work, a set of independent MOOs are carried out at fixed r_{hi} , L_{nac} and r_{te} . As such, the 2D axisymmetric optimisation have four degrees of freedom. The 3D non-axisymmetric configurations are controlled with 5 aero-lines and the intake scarf and droop angles (Tejero et al. 2021) (Figure 1). For this study the scarf and droop angles are also fixed and, therefore, a total of 20 degrees of freedom are used during the MOO of 3D non-axisymmetric aero-engine nacelles. The computational domain is generated with a multi-block structured mesh (G.Armstrong et al. 2015). A density-based solver is used to solve the compressible steady Favre-averaged Navier-Stokes equations (Hinze 1975) with a second order spatial discretization and the Green-Gauss node based scheme. The $k-\omega$ SST model (Menter 1994, Embuena et al. 2018) is applied as turbulence closure and the Sutherland's law is used for the calculation of the viscosity (Sutherland 1893). The first cell height is adjusted to have a y^+ of approximately 50 so that the near region walls within the boundary layers are approximated with the wall function model implemented in the $k-\omega$ SST closure. Pressure farfield boundary conditions are used to model the freestream. The Mach number is imposed together with the static pressure and temperature, which are calculated from the ISA model (ISO International Standard 2533-1975 1978) and the user-prescribed altitude. All the housing component surfaces, i.e. spinner, intake, fan cowling, bypass duct the core duct surfaces, are modelled as no-slip adiabatic walls. The flow conditions at the fan face are defined with a target massflow pressure outlet boundary condition, which is derived from the user-prescribed mass flow capture ratio (MFCR). The flow conditions at the bypass and core duct inlets are modelled as pressure inlets using prescribed total pressure and temperature values. The method is coupled with the OMOPSO algorithm (Sierra & C.A Coello Coello 2005, Li et al. 2018). All the multi-point, multi-objective optimisations start with a design space exploration based on a Latin Hypercube Sampling (LHS) (Helton & Davis 2003, Wansaseub et al. 2020). The process is driven with numerical simulations and the convergence criteria of the MOOs is based on the hypervolume indicator (Auger et al. 2012), which is one of the most used set-quality indicators for multi-objective optimisa-

tions (Guerreiro et al. 2022). This metric measures the n-dimensional hypervolume of the Pareto optimal set where n refers to the number of objective functions. The optimisations were classified as converged when the changes in the hypervolume reduced to below 1%.

For the 2D axisymmetric and 3D non-axisymmetric computational approaches, a grid sensitivity was carried out. It was based on a representative mid-cruise condition of future civil aero-engines ($M = 0.85$, $MFCR = 0.7$, $h = 10668\text{m}$) with a short nacelle of $L_{nac}/r_{hi} = 3.1$. Three different cell sizes were considered in which a reference one was selected and a halved and doubled resolution grid were created. The Grid Convergence Index (GCI) of the reference grid was calculated following Roache's method (Roache 1994). For the 2D axisymmetric approach and cell sizes 35k, 70k and 140k, a GCI of about 0.04% was achieved on nacelle drag normalised with the net thrust (Figure 2). For the 3D non-axisymmetric method with cell sizes of 0.5M, 1.0M and 2.0M provided a GCI of approximately 0.2% on nacelle drag normalised with the net thrust (Figure 3). Similar values of GCI have been previously used in optimisation studies for aero-engine nacelle applications (Tejero, Robinson, MacManus & Sheaf 2019, Tejero et al. 2021). For both numerical approaches the farfield is located at $80r_{max}$. This selection was based on domain sensitivity studies for 2D and 3D configurations (Tejero, Robinson, MacManus & Sheaf 2019, Tejero et al. 2021) in which four different domain sizes ($40r_{max}$, $60r_{max}$, $80r_{max}$ and $100r_{max}$) were considered. Across this range the cruise nacelle drag increased monotonically with a 0.10% reduction between the $80r_{max}$ and $100r_{max}$ configurations. As such, the $80r_{max}$ domain size is employed in this investigation.

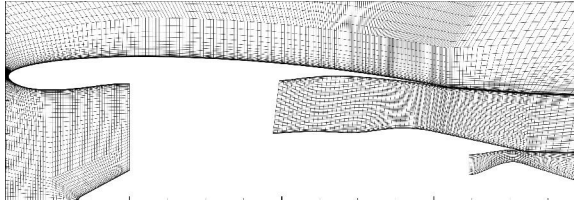


FIGURE 2: Computational mesh for the 2D axisymmetric numerical model

The numerical methods have been validated with two different nacelle configurations. The 2D axisymmetric numerical approach was compared with a design based on an axisymmetric geometry with a cylindrical centerbody, a simple circular arc for the forebody, and a straight line for the afterbody (Robinson et al. 2018). This geometry is referred as Nacelle-1. Conversely, the predictive capability of the 3D numerical method was evaluated against a more modern configuration with no centrebody and a continuously curved geometry from leading to trailing edge (Robinson et al. 2018). This design is referred as Nacelle-2. For both configurations (Nacelle-1 and Nacelle-2), the nacelle drag for a set of different Mach number was evaluated at a representative cruise $MFCR = 0.7$. While for the Nacelle-1 the incidence angle was set to 0° due to the 2D axisymmetric nature of the simulations, the Nacelle-2 3D numerical approach was tested for an incidence angle of 2° . For a nominal Mach number of $M = 0.85$, relative to the experimental data the normalised cruise drag is overpredicted by 0.1% and 1.1% for the 2D and 3D numerical approaches, respectively (Figures 4 and 5). The drag rise Mach number (M_{DR}) (Tejero, Robinson,

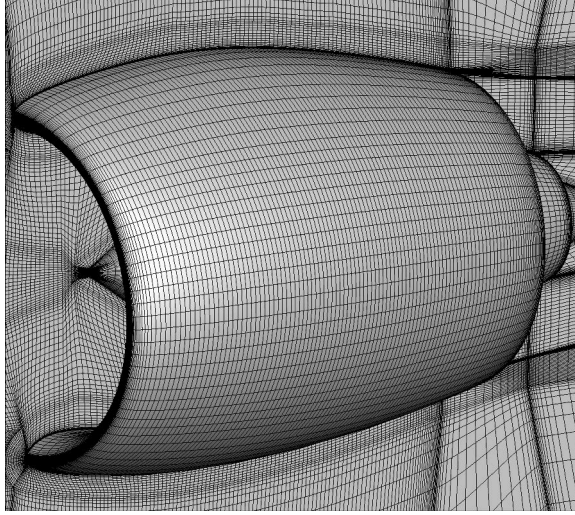


FIGURE 3: Computational mesh for the 3D numerical model

MacManus & Sheaf 2019) was predicted within -0.003 and +0.002 for the Nacelle-1 and Nacelle-2 configurations, respectively. To test the effect of reducing the massflow capture ratio in a windmilling scenario, the nacelle drag for a set of MFCR at constant $M = 0.85$ was performed for the Nacelle-1 design (Figure 6). Within the range of MFCR = 0.5 and 0.4, the nacelle drag was underpredicted by about 4%.

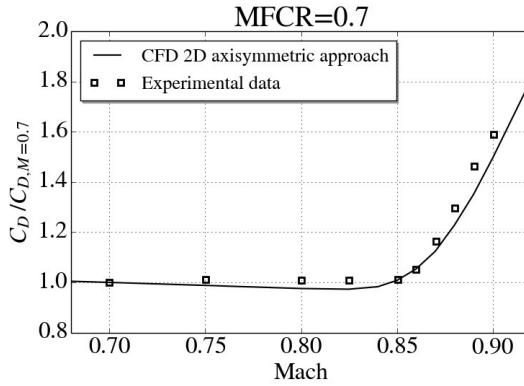


FIGURE 4: Comparison of nacelle drag as a function of Mach number for the 2D axisymmetric nacelle configuration

3. Results and analysis

This work develops a multi-level optimisation approach for compact aero-engines nacelles. The process is used to map out the new UHBPR nacelle design challenge and quan-

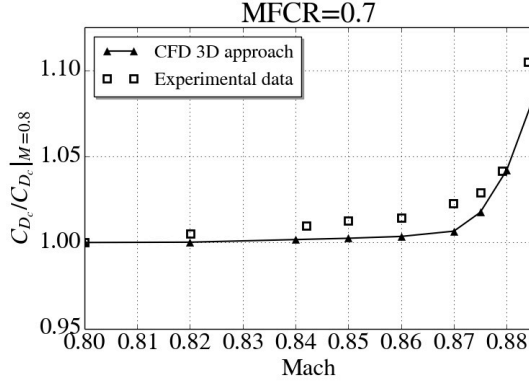


FIGURE 5: Comparison of nacelle drag as a function of Mach number for the 3D nacelle configuration

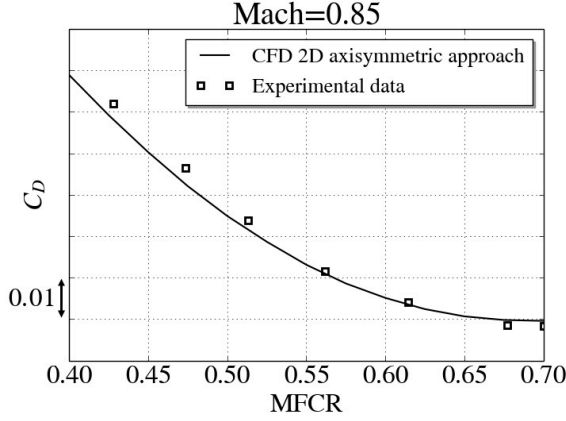


FIGURE 6: Comparison of nacelle drag as a function of massflow capture ratio for the 2D axisymmetric nacelle configuration

tify the intake/fanowl trade-off on nacelle drag. For this investigation, two main bulk parameters were considered: r_{hi}/r_{fan} to quantify the intake compactness and L_{nac}/r_{hi} to assess the impact of shortening the fanowl length. The process was initialised with a set of multi-point, multi-objective optimisation for 2D axisymmetric configurations. The baseline geometry is the optimised design for a conventional configuration with $L_{nac}/r_{hi} = 3.6$ and a nominal r_{hi}/r_{fan} . Overall, 16 independent MOOs were carried out for a full factorial combination of 4 different L_{nac}/r_{hi} and 4 different r_{hi}/r_{fan} values. The nacelle lengths were $L_{nac}/r_{hi} = 2.85, 3.1, 3.35$ and 3.6 and the r_{hi}/r_{fan} values were defined as a reduction relative to the nominal intake compactness with $\Delta r_{hi}/r_{fan} = 0\%, -1.25\%, -2.5\%$ and -3.75% . For the optimal regions of the design space, additional 3D non-axisymmetric MOOs were performed to determine the final designs.

The design and optimisations were undertaken with representative separate-jet ex-

hausts (Goulos et al. 2016). The aero-engine operates with a bypass ratio above 15 and a nominal standard net thrust (F_N) of about 60kN (Goulos et al. 2016) at mid-cruise conditions. The massflow through the engine was set to have a mass flow capture ratio of $MFCR \approx 0.7$ (Tejero, Robinson, MacManus & Sheaf 2019) at mid-cruise conditions and $\Delta r_{hi}/r_{fan} = -3.75\%$. As such, the MFCR decreases as the intake is less compact, i.e. larger r_{hi}/r_{fan} .

3.1. 2D axisymmetric studies

Three flight conditions are used to drive the 2D axisymmetric optimisation routine (Table 1) in the first step of the multi-level design approach. Whilst the mid-cruise drag has a large impact on the overall engine fuel burn, the other two (iM and diversion) are considered to ensure aerodynamic robustness at off-design conditions. They aim to quantify the sensitivity of the nacelle aerodynamics to perturbations on Mach number (iM) and to large changes on the massflow capture ratio (windmilling diversion). The mid-cruise drag (D_{cruise}) and increased Mach number drag (D_{iM}) are considered as regression objective functions (Regr. in Table 1) in which their values are minimised during the MOO process. The windmilling diversion scenario is a combined regression and classification (Regr./Class. in Table 1) objective function. An acceptability threshold on the maximum length of the local boundary layer separation (L_{sep}) was defined for this off-design condition. An acceptability level of $L_{sep}/L_{nac} < 0.05$ was set for the optimisation. The nacelle diversion drag ($D_{diversion}$) of the designs that fulfill this criteria is minimised and the configuration that exceed it are rejected from the optimisation process. This is to ensure that the MOO is not driven to regions of the design space that are very sensitivity to wind-milling off-design conditions. Overall, around 5,500 CFD evaluations are performed in the optimisation routine.

Name	Mach	MFCR	Type
<i>cruise</i>	0.85	0.70	Regr.
<i>iM</i>	0.87	0.70	Regr.
<i>diversion</i>	0.65	< 0.5	Regr./Class.

TABLE 1

Operating conditions for the 2D axisymmetric MOOs. The MFCR value is for the $\Delta r_{hi}/r_{fan} = -3.75\%$ configuration

An example of the Pareto front from the 2D axisymmetric multi-point, multi-objective optimisation of the reference aero-engine architecture ($L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$) is presented in Figure 7. It presents the results for the non-dominant nacelle designs for a 2D projection in the D_{cruise} - $D_{diversion}$ space and colored with D_{iM} . It highlights the trade-off between nacelle cruise and diversion drag, and demonstrates the importance of including this flight condition in a nacelle optimisation process. Otherwise, the design process would be driven to parts of the design space with low D_{cruise} but that are not aerodynamically feasible due to the large penalties at off-design.

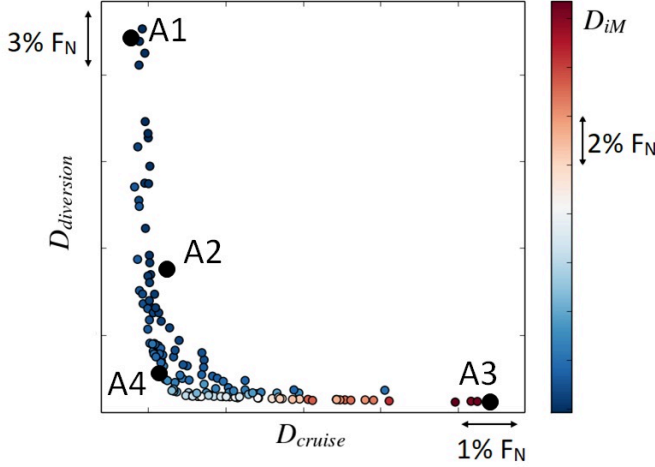


FIGURE 7: Pareto front for the reference 2D axisymmetric aero-engine nacelle with $L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$

To provide an initial insight of the transonic flow aerodynamics of aero-engine nacelles four configurations were downselected. They are the configurations with the minimum D_{cruise} , minimum D_{im} , minimum $D_{diversion}$ and a trade-off design, and are referred as A1, A2, A3 and A4, respectively (Figure 7). Figure 8 presents the isentropic Mach number along the fanCowl at mid-cruise conditions for the 4 aero-engine nacelles. There are differences on the initial acceleration around the nacelle lip between the designs. While A1, A2 and A4 have a similar axial location of the peak M_{is} at $X/L_{nac} \approx 0.01$, the design A3 has a change on the flow topology with a continuous acceleration along the nacelle forebody to terminate in a shock wave at $X/L_{nac} \approx 0.41$. Relative to the designs A1 (minimum D_{cruise}) and A4 (trade-off design) that have the same peak M_{is} , the shape A2 (minimum D_{im}) has a reduction on peak M_{is} of about 0.08. While the design A1 has a smooth flow deceleration along the profile, the designs A2 and A4 have a double shock structure and the design A3 (minimum $D_{diversion}$) has a single strong shock. These changes in the aerodynamics are accompanied by variations on mid-cruise drag. Relative to the minimum cruise drag configuration, A1, the nacelle drag increases by approximately 6.0%, 75.0% and 5.0% for the architectures A2, A3 and A4, respectively.

Having demonstrated the capability of the 2D axisymmetric method for multi-point, multi-objective optimisations, an independent MOO for the full factorial combination of cases with $L_{nac}/r_{hi} = 2.85, 3.1, 3.35$ and 3.6 and $\Delta r_{hi}/r_{fan} = 0\%, -1.25\%, -2.5\%$ and -3.75% , was performed. For each optimisation a Pareto front was derived from which a nacelle configuration could be downselected. For the reference configuration with $L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$ the downselection criteria was based on the minimum achievable mid-cruise drag with $D_{cruise} < 1.1 \cdot D_{im}$, in which for the windmilling diversion case the threshold of acceptable local boundary layer separation along the nacelle, i.e. $L_{sep}/L_{nac} < 0.05$, is met. For the rest of configurations, the downselection criteria was based on the minimum achievable D_{cruise} , that have D_{im} and $D_{diversion}$

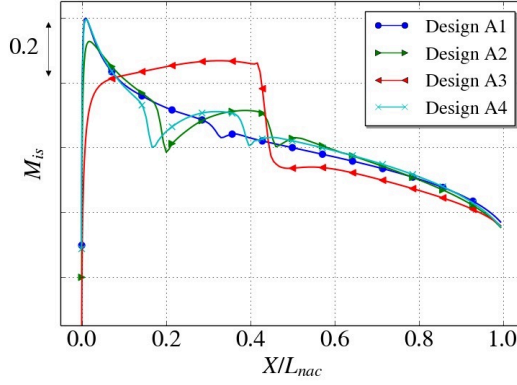


FIGURE 8: Isentropic Mach number distribution for downselected nacelles of the reference 2D axisymmetric MOO

lower than the associated drag values of the reference nacelle. Besides, it was also ensured that the configurations met the threshold in flow separation of $L_{sep}/L_{nac} < 0.05$ for the diversion scenario. Figure 9 presents the mid-cruise nacelle drag changes normalised with the nominal standard net thrust across the design space. It highlights the large impact of r_{hi}/r_{fan} . For example, for a fixed $L_{nac}/r_{hi} = 3.1$ which is representative of a compact aero-engine nacelle (Tejero, MacManus & Sheaf 2019), the normalised drag reduces by 1.6% when the intake highlight is moved inboards from $\Delta r_{hi}/r_{fan} = 0\%$ to $\Delta r_{hi}/r_{fan} = -3.75\%$ (Figure 9). This is caused by the sensitivity of short fancowls to MFCR (Tejero, Robinson, MacManus & Sheaf 2019). Because the massflow through the engine is the same for both configurations ($\Delta r_{hi}/r_{fan} = 0\%$ and $\Delta r_{hi}/r_{fan} = -3.75\%$), the effective MFCR reduces when r_{hi}/r_{fan} increases. On the other hand, for a fixed $\Delta r_{hi}/r_{fan} = -3.75\%$, the normalised drag varies by 0.6% across the range of nacelle lengths considered, in which the minimum value is at $L_{nac}/r_{hi} = 3.1$. Although a further reduction to $L_{nac}/r_{hi} = 2.85$ reduces the wetted area, the design has a stronger shock wave and a concomitant increase in wave drag. This results in a normalised drag penalty of 0.6% with respect to the aerodynamically optimal at $L_{nac}/r_{hi} = 3.1$. Conversely, increasing the L_{nac}/r_{hi} to 3.6 provides a normalised drag penalty of 0.5% (Figure 9).

Across the design space, the optimal aero-engine nacelle was at $L_{nac}/r_{hi} = 3.1$ and $\Delta r_{hi}/r_{fan} = -3.75\%$. Relative to the baseline architecture with $L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$, the normalised cruise drag is reduced by 1.6%. This initial 2D axisymmetric study has demonstrated the potential benefits of compact nacelle for future civil aero-engines and has quantified the impact of the bulk parameters L_{nac}/r_{hi} and r_{hi}/r_{fan} on nacelle drag (Figure 9). It is important to note that the minimum nacelle drag was achieved for the most compact intake considered ($\Delta r_{hi}/r_{fan} = -3.75\%$) and a normalised nacelle length of $L_{nac}/r_{hi} = 3.1$ (Figure 9). This investigation is focused on the nacelle drag characteristics as a function of r_{hi}/r_{fan} and L_{nac}/r_{hi} , which is a multi-

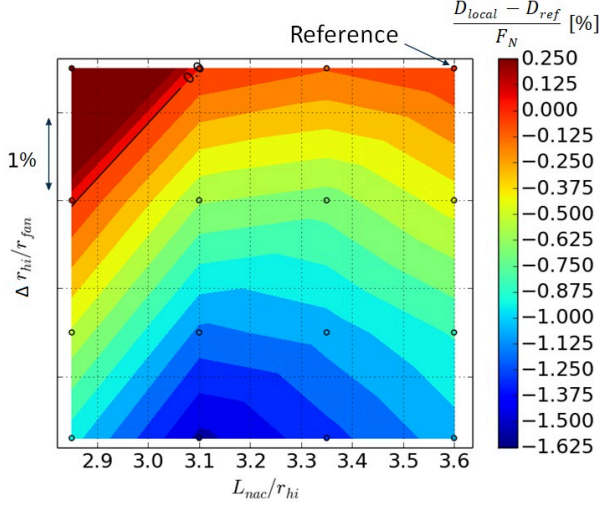


FIGURE 9: Mid-cruise normalised drag changes with net thrust $((D_{local} - D_{ref})/F_N)$ across the r_{hi}/r_{fan} - L_{nac}/r_{hi} design space considered. D_{ref} refers to the nacelle drag for the reference nacelle with $L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$

disciplinary task, and design constraints usually must be met for the intake and nacelle housing components. Whilst the findings obtained in the 2D axisymmetric optimisations suggest to further reduce $\Delta r_{hi}/r_{fan}$, this was not performed due to the envisaged aerodynamic unfeasibility of such configurations from an intake operability point of view. With respect to the reference geometry, the intake compactness in terms of r_{hi}/r_{fan} was reduced by approximately 3.5%. This is a relatively large intake design space and is within the range for civil aero-engine intakes that Peters et al. (Peters et al. 2015) suggested as representative for future civil ultra-short configurations with low fan pressure ratio propulsors.

3.2. 3D non-axisymmetric studies

The first step of the multi-level optimisation process has demonstrated the large impact of intake compactness (r_{hi}/r_{fan}) on nacelle cruise drag (Figure 9). For the two most compact intake configurations considered ($\Delta r_{hi}/r_{fan} = -2.5\%$ and -3.75%), the optimal nacelle length is $L_{nac}/r_{hi} = 3.1$. As such, an investigation for 3D non-axisymmetric architectures around this part of the design part has been carried out. Overall, four independent 3D MOOs were performed to understand the effect of r_{hi}/r_{fan} on short nacelles. For a fixed $L_{nac}/r_{hi} = 3.1$, three different intakes were considered: $\Delta r_{hi}/r_{fan} = -2.0\%$, -3.0% and -3.75% . A MOO for the reference geometry with $L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$ was conducted to establish a 3D baseline aero-engine nacelle.

The multi-point, multi-objective optimisation process is driven with four different operating conditions (Table 2). The first three ones (cruise, iM and diversion) are similar to the 2D axisymmetric MOOs in which the only difference is that the angle of attack (AoA) was set to 4.5° . This is to mimic a similar effective incidence of an installed configura-

tion. The 3D MOOs also include a windmilling end-of-runway (EoR) high angle of attack scenario with $AoA = 20^\circ$ (Hoelmer et al. 1987). The nacelle drag for this flight condition is not minimised during the optimisation but classified based on local boundary layer separation (L_{sep}). As for the windmilling diversion case, the acceptability threshold was defined as $L_{sep}/L_{nac} < 0.05$. This is to ensure that the designs that progress through the generations of the MOO are aerodynamically robust. Within this context, the concept of aerodynamic robustness for the windmilling cases refers to designs that are not expected to have large regions of boundary layer separation when the operating conditions of Mach number, massflow capture ratio or angle of attack are slightly changed. The criteria of maximum flow separation of $L_{sep}/L_{nac} < 0.05$ for the nominal windmilling scenarios (Table 2) aims to drive the multi-point, multi-objective optimisation to regions of the design space with an acceptable aerodynamic performance. Overall, around 10,000 CFD evaluations are performed in the optimisation routine.

Name	Mach	MFCR	AoA	Type
<i>cruise</i>	0.85	0.70	4.5	Regr.
<i>Mach</i>	0.87	0.70	4.5	Regr.
<i>diversion</i>	0.65	< 0.5	4.5	Regr./Class.
<i>EoR</i>	0.25	< 0.5	20.0	Class.

TABLE 2

Operating conditions for the 3D non-axisymmetric MOOs. The MFCR value is for the $\Delta r_{hi}/r_{fan} = -3.75\%$ configuration

Having computed the four independent 3D MOOs, a set of Pareto optimal designs were determined. To aid with the comparison of the optimal nacelle configurations for the four 3D optimisations, a comparison of the Pareto fronts only on the D_{cruise} - $D_{diversion}$ space is shown in Figure 10. For the three configurations with $L_{nac}/r_{hi} = 3.1$ there are designs that reduce both the mid-cruise drag and diversion with respect to the optimal designs from the reference geometry ($L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$). It highlights the benefits of compact aero-engine nacelles with respect to the current in-service architecture.

A trade-off nacelle was downselected from each of the MOOs and further investigated. They are referred to B1, B2, B3 and B4 for the $\Delta r_{hi}/r_{fan} = -3.75\%$, -3.0% and -2.0% at fixed $L_{nac}/r_{hi} = 3.1$ and $\Delta r_{hi}/r_{fan} = 0\%$ at $L_{nac}/r_{hi} = 3.6$, respectively (Figure 10). For the B4 design, the downselection criteria was based on the minimum achievable mid-cruise drag that satisfies $D_{cruise} < 1.1 \cdot D_{iM}$ and the threshold of acceptable local boundary layer separation along the nacelle of $L_{sep}/L_{nac} < 0.05$ is met for the windmilling diversion and windmilling end-of-runway high angle of attack scenario (Table 2). For the other configurations, i.e. B1, B2 and B3, the downselection criteria was based on the minimum achievable mid-cruise drag in which the drag for an increased Mach number (D_{iM}) and windmilling diversion ($D_{diversion}$) was lower than for the B4 design, whilst the flow separation threshold of $L_{sep}/L_{nac} < 0.05$ was also fulfilled for

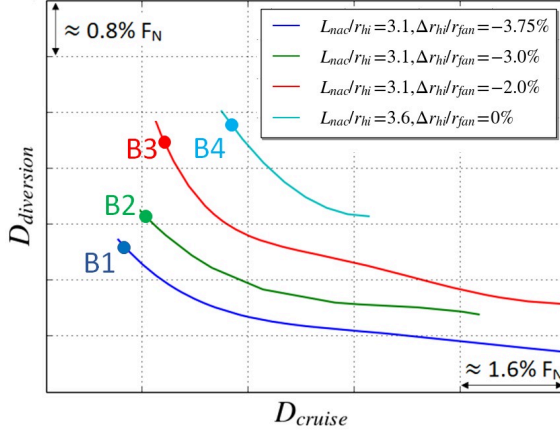


FIGURE 10: Projection into the D_{cruise} - $D_{diversion}$ space of the Pareto fronts for the 3D configurations

both windmilling conditions. For example, for the most compact nacelle considered in this study, i.e. B1 ($\Delta r_{hi}/r_{fan} = -3.75\%$), the normalised mid-cruise drag with respect to the net thrust can be reduced by up to 1.6% with respect to the B4 design. A similar value was obtained with the 2D axisymmetric MOO studies (Figure 9). The benefit identified for the B1 design reduces to approximately 1.2% and 1.0% when the intake highlight is moved outboard to $\Delta r_{hi}/r_{fan} = -3.0\%$, -2.0% , respectively (Figure 10). This outcome demonstrates that the intake compactness is a key design variable to achieve low values of nacelle drag for short configurations (L_{nac}/r_{hi}) that are expected in future civil aero-engine nacelles (Tejero, MacManus & Sheaf 2019). This study quantifies the impact of intake compactness on nacelle drag. However it is important to note that the feasibility of these configurations to meet the off-design intake requirements should be considered within a complete aero-engine nacelle design process (Peters et al. 2015). Nevertheless, this work provides for the first time an initial step in quantifying the nacelle drag as a function of the intake bulk parameter r_{hi}/r_{fan} within the envisaged design space for UHBPR aero-engine nacelles.

To provide a better insight of the flow physics of compact configurations, the isentropic Mach number distribution for the optimal nacelle B1 ($L_{nac}/r_{hi} = 3.1$ and $\Delta r_{hi}/r_{fan} = -3.75\%$) and the baseline geometry B4 ($L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$) are presented in Figure 11. Both configurations have a stronger initial acceleration around the nacelle lip at the top-line ($\psi = 0^\circ$) and the top-control line ($\psi = 45^\circ$) than for the other lines. The peak M_{is} for the compact geometry (B1) is 0.02 larger with respect to the reference one (B4). For both housing component styles there is an initial shock wave on the nacelle forebody, which is followed by a re-acceleration and a second weaker shock around the nacelle crest. Both shock structures are found in all cross-sections and the strength mitigates azimuthally from the top-line ($\psi = 0^\circ$) to the bottom-line ($\psi = 180^\circ$) (Figure 11). Relative to the B1 design, similar flow physics were found for the compact B2 and B3 geometries.

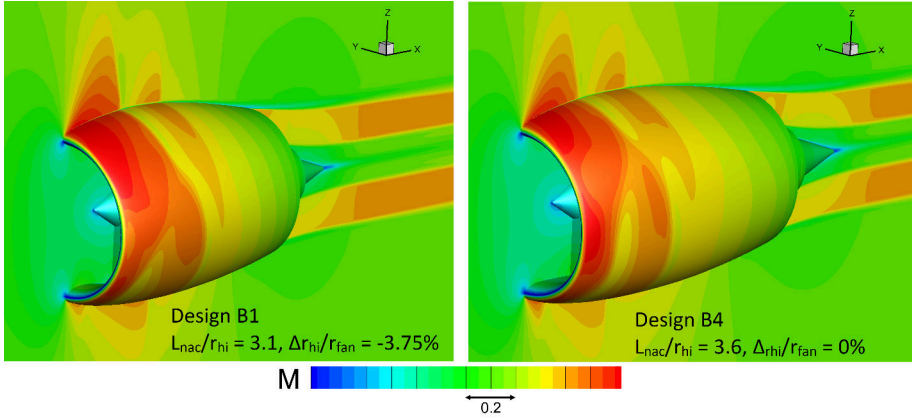


FIGURE 11: Mach number comparison for the downselected compact design B1 and the baseline architecture B4

For the downselected aero-engine nacelles derived from the four 3D MOOs (B1, B2, B3 and B4), the nacelle drag sensitivity to Mach number and MFCR was investigated. This is to quantify the aerodynamic performance across a wide range of operating conditions that might be encountered throughout the flight envelope. For the Mach number variations and relative to the conventional nacelle (B4) with $L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$, the most compact architecture B1 present benefits for all flight Mach number. Whilst for the cruise Mach number of 0.85, the normalised drag benefit is 1.6%, this reduces to 1.3% and 0.6% at $M = 0.87$ and 0.88 , respectively. For the B2 and B3 designs there are drag benefits with respect to the reference B4 for Mach numbers between $M = 0.80$ and 0.87 (Figure 12). However both designs (B2 and B3) have a normalised nacelle drag penalty of about 1.5% at $M = 0.88$ relative to B4. This is due to the greater sensitivity of both compact architectures (B2 and B3) to Mach number caused by operating at lower mid-cruise MFCR than the B1 design. For the massflow capture ratio variations, all the short fan cowlings have drag benefits at relatively high MFCR with respect to the reference $L_{nac}/r_{hi} = 3.6$ and $\Delta r_{hi}/r_{fan} = 0\%$ configuration (Figure 13). However, the benefits erode for low MFCR values due to the large sensitivity of short fan cowl to low massflow capture ratios (Schreiner et al. 2020).

4. Conclusions

This paper has presented a multi-level two-step process for the design and optimisation of compact civil aero-engine nacelles. It starts with multi-point, multi-objective optimisations of 2D axisymmetric configurations to initially identify the potential optimal parts of the design space. For selected configurations, bespoke 3D non-axisymmetric optimisations are performed. Different operating points of the flight envelope are considered to ensure aerodynamic robustness. They include flight conditions of the cruise segment as well as off-design windmilling scenarios. The optimisation process is driven with regression and classification objective functions to ensure that the identified configurations are

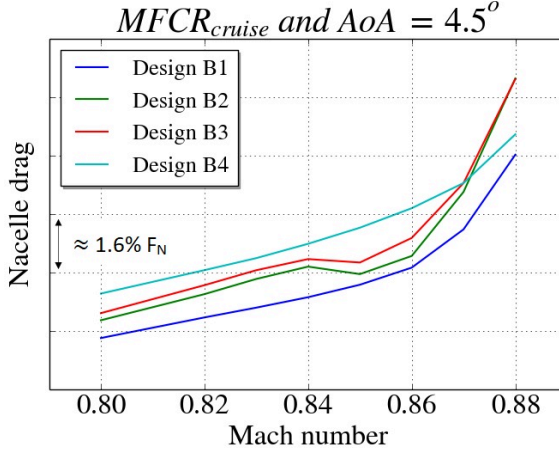


FIGURE 12: Comparison of nacelle drag as a function of Mach number for the downselected 3D nacelles

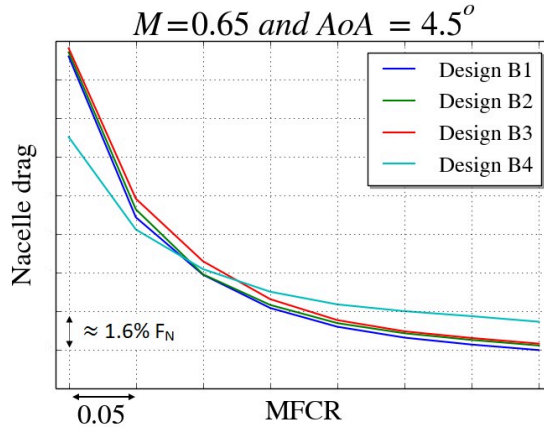


FIGURE 13: Comparison of nacelle drag as a function of massflow capture ratio for the downselected 3D nacelles

aerodynamically feasible. The developed method has been used for intake/fanCowl trade-off studies, in which the effects of intake compactness and fanCowl length on the nacelle drag have been quantified. The notable influence of intake compactness ($\Delta r_{hi}/r_{fan}$) on the nacelle drag has been demonstrated. This bulk parameter has also a large impact on the intake range of operability and, as such, it is important to assess its viability for future civil aero-engines. Therefore, future studies should consider both housing components, i.e. intake and nacelle, within an integrated aero-engine design process. Although this study has focused on the nacelle, the developed method establishes the first step in quantifying the nacelle drag as part of an intake design procedure for ultra-high bypass ratio architectures. Relative to a more conventional aero-engine nacelle, the developed process has yielded a compact nacelle configuration with approximately a mid-cruise nacelle drag

reduction of 1.6% of the nominal standard net thrust.

Acknowledgments

This work was partially funded by the INNOVATE UK FANFARE project. It included the tools, methods development and 2D design studies. Data supporting this study are included within the article and/or supporting materials.

This project has received funding from the Clean Sky-2 Joint Undertaking (JU) under grant agreement No-101007598 – ODIN Project. The JU receives support from the European Union's Horizon 2020 research and innovation programme and the Clean Sky 2 JU members other than the Union. This funding covered the 3D design studies.

References

- Albert, M. & Bestle, D. (2013), Aerodynamic Design Optimization of Nacelle and Intake, in 'Proceedings of ASME Turbo Expo 2013: Turbine Technical Conference and Exposition', number GT2013-94857, American Society of Mechanical Engineers.
- Auger, A., Bader, J., Brockhoff, D. & Zitzler, E. (2012), 'Hypervolume-Based Multiobjective Optimization: Theoretical Foundations and Practical Implications', *Theoretical Computer Science* **425**, 75–103.
- Bijewitz, J., Seitz, A., Hornung, M. & Bauhaus, E. L. (2014), Architectural Comparison of Advanced Ultra-High Bypass Ratio Turbofans for Medium to Long Range Application, in 'Deutscher Luft- und Raumfahrtkongress, DLR'.
- Birch, N. (2000), '2020 Vision: The Prospects for Large Civil Aircraft Propulsion', *The Aeronautical Journal* **104 (1038)**, 347–352.
- Christie, R., Heidebrecht, A. & MacManus, D. G. (2017), 'An Automated Approach to Nacelle Parameterisation Using Intuitive Class Shape Transformation Curves', *Journal of Engineering for Gas Turbines and Power* **139**(6), 062601–1 – 062601–9.
- Christie, R., Robinson, M., Tejero, F. & MacManus, D. (2019), 'The Use of Hybrid Intuitive Class Shape Transformation Curves in Aerodynamic Design', *Aerospace Science and Technology* **95**, 105473.
- Cumpsty, N. A. (2010), 'Preparing for the Future: Reducing Gas Turbine Environmental Impact—IGTI Scholar Lecture', *Journal of Turbomachinery* **132**, 041017.
- Daggett, D. (2002), Ultra-Efficient Engine Technology Systems Integration and Environmental Assessment, Technical Report CR-2002-211754, NASA.
- Daggett, D., Brown, S. & Kawat, R. (2003), Ultra-Efficient Engine Diameter Study, Technical Report CR-2003-212309, NASA.
- Deb, K., Pratap, A., Agarwal, S. & Meyarivan, T. (2002), 'A Fast and Elitist Multiobjective Genetic Algorithm: NSGA-II', *IEEE Transactions on Evolutionary Computation* **6**, (2), 182 – 197.

- Embuena, F. T., Doerffer, P., Flaszynski, P. & Szulc, O. (2018), 'Passive Flow Control Application for Rotorcraft in Transonic Conditions', *International Journal of Numerical Methods for Heat & Fluid Flow* **28**(5), 1080–1095.
- Fang, X., Zhang, Y., Li, S., & Chen, H. (2016), Transonic Nacelle Aerodynamic Optimization Based on Hybrid Genetic Algorithm, in '17th AIAA/ISSMO Multidisciplinary Analysis and Optimization Conference, AIAA AVIATION Forum, AIAA Paper Number 2016-3833'.
- G.Armstrong, C., Fogg, H., C.M & Robinson, T. T. (2015), 'Common Themes in Multi-block Structured Quad/Hex Mesh Generation', *Procedia Engineering* **124**, 70–82.
- Goulos, I., Otter, J., Tejero, F., Rebassa, J. H. & MacManus, D. (2021), 'Civil Turbofan Propulsion Aerodynamics: Thrust-Drag Accounting and Impact of Engine Installation Position', *Aerospace Science and Technology* **111**, 106533.
- Goulos, I., Stankowski, T., Otter, J., MacManus, D., Grech, N. & Sheaf, C. (2016), 'Aerodynamic Design of Separate-Jet Exhausts for Future Civil Aero-Engine, Part 1: Parametric Geometry Definition and CFD Approach', *Journal of Engineering for Gas Turbines and Power* **138**(8).
- Guerreiro, A., Fonseca, C. & Paquete, L. (2022), 'The Hypervolume indicator: Computational Problems and Algorithms', *ACM Computing Surveys* **54**, 1–42.
- Helton, J. C. & Davis, F. J. (2003), 'Latin Hypercube Sampling and the Propagation of Uncertainty in Analyses of Complex Systems', *Engineering and System Safety* **81**, 23–69.
- Hinze, J. (1975), Turbulence, in 'McGraw-Hill Publishing Co., New York'.
- Hoelmer, W., Younghans, J. L. & Reynal, J. (1987), 'Effect of Reynolds Number on Upper Cowl Flow Separation', *Journal of Aircraft* **24** (3), 161 – 169.
- ISO International Standard 2533-1975 (1978), Standard Atmosphere First Edition, Technical report, ISO, Geneva, Switzerland.
- Kulfan, B. (2010), 'Recent Extensions and Applications of the 'CST' Universal Parametric Geometry Representation Method', *Aeronautical Journal* **114**(1153), 157–176.
- Li, L., Bai, J., Guo, T., He, X. & Fu, Z. (2018), 'Aerodynamic Design of the Supersonic Aircraft Wing-Shape and Wing-Twist Optimization', *International Journal of Aeronautical and Space Sciences* **19**, 340–353.
- Marx, J. (2015), Installation Features of Advances, Very High Bypass Turbofan Propulsion Systems, in 'AIAA/AHS/ASEE Aircraft Design, Systems and Operations Conference, AIAA Paper 2015-3778'.
- Matesanz-Garcia, J., Christie, R., Tejero, F., MacManus, D. & Heidebrecht, A. (2020), An Automated Approach for the Aerodynamic Design of Close-Coupled Propulsion/Airframe Configurations, in 'Aerospace Europe Conference 2020'.

- Menter, F. R. (1994), 'Two-Equation Eddy-Viscosity Turbulence Models for Engineering Applications', *AIAA Journal* **32**(8), 1598–1605.
- Millot, G., Scholz, O., Ouhamou, S., Becquet, M. & Magnabal, S. (2020), 'Development of a 3D CFD Aerodynamic Optimization Tool and Application to Engine Air Intake Design', *International Journal of Numerical Methods for Heat & Fluid Flow* **30**(9), 4219–4239.
- Peters, A., Spakovszky, Z. S., Lord, W. & Rose, B. (2015), 'Ultrashort Nacelles for Low Fan Pressure Ratio Propulsors', *Journal of Turbomachinery* **137**(2).
- Roache, P. (1994), 'A Method for Uniform Reporting of Grid Refinement Studies', *Journal of Fluids Engineering* **116** (3), 405–413.
- Robinson, M., MacManus, D. & Sheaf, C. (2018), 'Aspects of Aero-Engine Nacelle Drag', *Proceedings of the Institution of Mechanical Engineers, Part G: Journal of Aerospace Engineering* **233**(5), 1667–1682.
- Rosin, P. & West, G. (1995), 'Curve Segmentation and Representation by Superellipses', *IEE Proceedings - Vision, Image and Signal Processing* **142**, 280 – 288.
- Sanchez-Moreno, F., MacManus, D., Tejero, F., J.Matesanz-Garcia & Sheaf, C. (2022), Robustness of Optimisation Algorithms for Transonic Aerodynamic Design, in 'Proceedings of 9th European Conference for Aeronautics and Space Sciences, EUCASS-3AF'.
- Schoenberg, I. J. (1964), 'Spline Functions and the Problem of Graduation', *Proceedings of the National Academy of Sciences of the United States of America* **52**(4), 947–950.
- Schreiner, B. D. J., Tejero, F., MacManus, D. & Sheaf, C. (2020), Robust aerodynamic design of nacelles for future civil aero-engines, in 'Proceedings of ASME Turbo Expo 2020: Turbomachinery Technical Conference and Exposition, GT2020-14470'.
- Sierra, M. & C.A Coello Coello, C. (2005), Improving PSO-Based Multi-objective Optimization Using Crowding, Mutation and ϵ -Dominance, in 'Evolutionary Multi-Criterion Optimization', Springer Berlin Heidelberg, pp. 505–519.
- Simpson, T., Mauery, T. M., Korte, J. J. & Mistree, F. (2001), 'Kriging Models for Global Approximation in Simulation-Based Multidisciplinary Design Optimization', *AIAA Journal* **39** (12), 2233–2241.
- Study Group MIDA (1979), Guide to In-Flight Thrust Measurement of Turbojets and Fan Engines, in 'Technical Report AGARD-AG-237, Advisory Group for Aerospace Research and Development'.
- Sutherland, W. (1893), 'The Viscosity of Gases and Molecular Force', *Philosophical Magazine* **5**(35), 507–531.

- Tejero, F., Christie, R., MacManus, D. & Sheaf, C. (2021), ‘Non-axisymmetric aero-engine nacelle design by surrogate-based methods’, *Aerospace Science and Technology* **117**, 106890.
- Tejero, F., Goulos, I., MacManus, D. & Sheaf, C. (2020), Effects of Aircraft Integration on Compact Nacelle Aerodynamics, in ‘AIAA SciTech 2020 Forum and Exposition, AIAA Paper 2020-2225’.
- Tejero, F., MacManus, D., Hueso-Rebassa, J., Sanchez-Moreno, F., Goulos, I. & Sheaf, C. (2022), ‘Aerodynamic Optimisation of Future Civil Aero-Engines by Dimensionality Reduction and Multi-Fidelity Techniques’, *International Journal of Numerical Methods for Heat & Fluid Flow*.
- Tejero, F., MacManus, D. & Sheaf, C. (2019), ‘Surrogate-Based Aerodynamic Optimisation of Compact Nacelle Aero-Engines’, *Aerospace Science and Technology* **93**, 105207.
- Tejero, F., MacManus, D. & Sheaf, C. (2020), Impact of Droop and Scarf on the Aerodynamic Performance of Compact Aero-Engine Nacelles, in ‘AIAA SciTech 2020 Forum and Exposition, AIAA Paper 2020-1522’.
- Tejero, F., Robinson, M., MacManus, D. & Sheaf, C. (2019), ‘Multi-Objective Optimization of Short Nacelles for High Bypass Ratio Engines’, *Aerospace Science and Technology* **91**, 410–421.
- Toubin, H., Dim, I. S. E. & Meheut, M. (2014), Multipoint Aerodynamic High Fidelity Shape Optimization of an Isolated Engine Nacelle, in ‘AIAA SciTech Forum 52nd Aerospace Sciences Meeting, AIAA Paper Number 014-0903’, Virginia Beach, VA, USA.
- Wansaseub, K., Slesongsom, S., Panagant, N., Pholdee, N. & Bureerat, S. (2020), ‘Surrogate-Assisted Reliability Optimisation of an Aircraft Wing with Static and Dynamic Aeroelastic Constraints’, *International Journal of Aeronautical and Space Sciences* **21**, 723–732.
- Zhang, Q. & Li, H. (2007), ‘MOEA/D: A Multiobjective Evolutionary Algorithm Based on Decomposition’, *IEEE Transactions on Evolutionary Computatio* **11** (6), 712–731.
- Zhong, Y. & Li, S. (2017), A 3D Shape Design and Optimization Method for Natural Laminar Flow Nacelle, in ‘Proceedings of ASME Turbo Expo 2017: Turbomachinery Technical Conference and Exposition, Paper Number GT2017-64379’, Vol. 1, pp. 825–830.



DSPACE

<https://dspace.org/>

Towards the design and optimisation of future compact aero-engines: intake/fan cowling trade-off investigation

Tejero, Fernando; MacManus, David G.; Matesanz García, Jesús; Swarthout, Avery E.; Sheaf, Christopher T.

2022-12-09

Emerald

<https://doi.org/10.1108/HFF-06-2022-0366>

Tejero F, MacManus DG, Matesanz-Garcia J, et al., (2023) Towards the design and optimisation of future compact aero-engines: intake/fan cowling trade-off investigation. International Journal of Numerical Methods for Heat and Fluid Flow, Volume 33, Issue 4, April 2023, pp. 1319-1335