

Understanding the impact of crop and food production on the water environment - Using sugar as a model

Tim Hess^a, Maite Aldaya^b, John Fawell^a, Helen Franceschini^c, Eric Ober^d, Ruediger Schaub^e, Jochen Schulze-Aurich^f

^a Cranfield University, Cranfield Water Science Institute, Bedford, MK43 0AL, UK

^b Complutense University of Madrid, Geol Fac, Dept Geodynam, E-28040 Madrid, Spain

^c Unilever, Colworth House, Bedfordshire, MK44 1LQ, UK

^d Rothamsted Research, Plant Biology and Crop Sciences, Harpenden, Hertfordshire, AL5 2JQ, UK

^e Bayer CropScience AG, 40789 Monheim, Germany

^f Syngenta Crop Protection AG, P.O. Box CH-4002 Basel, Switzerland

ABSTRACT

The availability of fresh water and the quality of aquatic ecosystems are important global concerns, and agriculture plays a major role. Consumers and manufacturers are increasingly sensitive to sustainability issues related to processed food products and drinks. The present study examines the production of sugar from the growing cycle through to processing to the factory gate, and identifies the potential impacts on water scarcity and quality and the ways in which the impact of water use can be minimised. We have reviewed the production phases and processing steps, and how calculations of water use can be complicated, or in some cases how assessments can be relatively straightforward. Finally, we outline several ways that growers and sugar processors are improving the efficiency of water use and reducing environmental impact, and where further advances can be made. This provides a template for the assessment of other crops.

Keywords: Footprint, Impact, Sugar, Water

INTRODUCTION

The impact that the production of crops and processing of raw materials into food products and drinks has on the water environment is under increasing scrutiny by consumers, producers, and environmental groups. The relevance of water management in the agricultural sector, which is responsible for 70% of global water withdrawals, is widely recognised.¹ There are pressures on the water environment arising from water withdrawal and pollution, while the

lack of water for agriculture, domestic and other uses can adversely impact on social requirements, in part through effects on the economy at a local to a global scale. The challenge of meeting the increasing global demand for food could result in significantly increased environmental impacts, however adoption of technologies to increase production and reduce environmental impacts may allow “sustainable intensification”.²

The impacts of water use in the supply-chain have often been overlooked but are increasingly subject to scrutiny by government, business and society. Consequently, food and drink companies are changing the way they address water and are increasingly seeking to promote sustainable water management outside their fence-lines to reduce and mitigate water-related risks and impacts from raw material production through processing to the final product particularly in processed food and drink manufacture.

The present study examines sugar from both cane and beet from the growing cycle through to processing to the factory gate, and identifies how much water is consumed and polluted and the ways in which the impact of water use can be minimised. Sugar provides a useful model crop to investigate water sustainability in crop and food production. Sugar is a major food ingredient, used in a range of processed foods and global sugar production is estimated at 175 million metric tonnes.³ It is grown on over 30 million hectares⁴ in a range of climatic zones which include both rain-fed and irrigated crops. Approximately 85% is derived from sugar cane, grown primarily in the tropics and subtropics, while the rest comes from sugar beet primarily in temperate regions. Water use is fundamental to both the growing and processing stages and sugar production is a major user of global freshwater resources.⁵ Although there are important differences in how the crops are grown and how the sugar is extracted from plant tissues in the factory which have an impact on the volumes of water used (consumed and polluted) to produce sugar, there are significant opportunities to reduce water-related risks in both the growing and processing stages.

WATER CONSUMPTION IN SUGAR PRODUCTION

In order to understand the impact of water used in sugar production on the freshwater environment, it is important to make two distinctions, firstly between freshwater that is withdrawn from surface or groundwater resources (“blue water”), and rainfall that is stored in

the soil and used for the growth of plants (“green water”).⁶ This differentiation is important as green water can only be used for growing crops or other vegetation whereas blue water use is in competition with other industrial, domestic and environmental uses. Reducing blue water consumption will make more water available for other uses. Secondly, it is also important to differentiate between water withdrawal and consumption. Some water may be withdrawn from a waterbody, used, and returned to the environment in good condition, with negligible impact on water availability. Water is considered to be “consumed” if it does not return, in the short term, to the waterbody from which it was withdrawn.

In the agricultural phase, both green and blue water are consumed in varying proportions by evapotranspiration according to the climate of the growing region and agricultural practices. In addition, the agricultural phase “inherits” the indirect, or “virtual” water associated with inputs (such as agrochemicals, fertilizers and energy). Some of the water used in the processing phase is blue water, which is lost as steam released to the atmosphere, and some is recovered, re-used treated, and returned to the environment. Virtual water inputs in the processing stage include the indirect water from the production stage and water associated with external energy generation (Figure 1) however, these are generally small in comparison to other water uses and are often ignored.^{7,8}

In any crop, the vast majority of water ‘used’ by the crop is drawn from the soil by the roots and evaporated into the atmosphere through the leaves (evapotranspiration). Only a small proportion remains in the tissues of the crop plants. The quantity of water required to grow a crop of sugar beet or sugar cane depends on the soil and climatic conditions, the timing and duration of the growing season, whether or not the crop grows under water-replete or water deficit conditions and other agricultural practices. As it is not feasible to measure evapotranspiration directly and partition this between blue and green water, the consumptive use of water in the agricultural phase is generally estimated using water balance modelling techniques.

The water requirement for growing sugar can differ considerably, ranging from 4 000 m³ ha⁻¹ for a sugar beet crop grown for eight months in relatively cool, temperate, rain-fed

conditions such as the UK;^{9,10} to 18 000 m³ ha⁻¹ for a 12-month ratoon cane crop grown in irrigated, tropical conditions such as South Africa¹¹ or Australia.¹²

The biomass accumulation of sugar cane and sugar beet is a linear function of the amount of solar energy absorbed and the water consumed by the crop.^{13,14} The slope of this latter relationship is the water use efficiency (WUE), which in agronomic terms is the yield obtained per unit water transpired. WUE can be affected by environmental, genetic and management factors. There are numerous values reported for the WUE of cane and beet crops¹⁰ and the WUE for an individual crop depends greatly on the environmental conditions in which the crop is grown. For sugar beet, examples of WUE values range from 1.2 g sugar kg water⁻¹ for an irrigated crop grown under hot, arid conditions in California, USA¹⁵, to 3.6 g sugar kg water⁻¹ typical of the cooler, humid conditions in the UK.¹³ Typical values for WUE in sugarcane range from 0.9 g sugar kg water⁻¹ for a water-limited crop¹⁶ to 1.5 sugar kg water⁻¹ for irrigated crops.^{14,17}

According to theory, plants with a C4 photosynthetic pathway (e.g. cane) have greater intrinsic WUE than plants exhibiting C3-type photosynthesis (e.g. beet)¹⁸ and C3 crops often show greater rates of water loss than C4 crops when grown in the same environment.¹⁹ Few, if any experiments have compared the WUE of sugar beet and sugarcane within the same experiment. However, tall crops such as sugar cane, which cause greater ‘stirring’ of the atmosphere than sugar beet, can lead to greater water loss from the crop surface. Therefore, crop canopy architecture and the growing environment may have a greater influence on total water consumption than photosynthetic strategy. Even though a C4 cane plant may have greater intrinsic WUE than a C3 beet, long-season plants grown in hot, dry conditions will inevitably tend to use more water than a short-season temperate crop.

Insufficient water is the largest single factor that limits crop productivity worldwide,²⁰ and sugar crops are no exception. Lack of adequate moisture can reduce yields even before plants appear wilted or stressed. In many temperate countries beet is a rain-fed crop, or receives supplementary irrigation in dry years and about half the global sugar cane crop is grown without irrigation.²¹ In rain-fed conditions, the blue water consumption associated with growing the crop

is negligible (comprising water used in crop spraying, general farm operations and indirect virtual water embodied in inputs).

The impact of food crops on water availability for other uses will depend on whether the crop is entirely rain-fed (green water) or requires additional water through irrigation (blue water). Although even rain-fed crops can affect local water balance, green water cannot be transferred to other uses, apart from agricultural uses. It is only available through access to and occupation of land and, as such, generally has a low opportunity cost,²² except when replacing high value ecosystems. Therefore, in most cases only the blue water consumption is relevant to environmental impacts. Where the crop is irrigated, the blue water consumption may be considerable. Mekonnen and Hoekstra²³ estimated the country-average blue water consumption per ton of crop between 0 to 350 m³ t⁻¹ for beet and 5 to 230 m³ t⁻¹ for cane, whilst the global averages (weighted by production) were 26 and 57 m³ t⁻¹ crop for beet and cane respectively.

Water is important to sugar processing. In some sugar beet factories, beet roots are washed and moved by water flume to the slicer for making cossettes, which are then hot-water extracted. Cane is also washed to remove soil before shredding and crushing. The extracted raw juice is clarified and filtered, and this ‘thin juice’ is then heated and evaporated to remove more water to create ‘thick juice’. The final heating and evaporation leads to the formation of sugar crystals, which are centrifuged out of solution and collected. The extracted crystals are given a final wash with clean water to remove any discoloration. The volume of freshwater withdrawn per ton of sugar produced depends on the degree of recycling of water within the facility²⁴ and the refining process²⁵ and can vary widely from one facility to another. For example, Ramjeawon²⁴ **Error! Bookmark not defined.** found that freshwater input ranged from 1.8 to 12.6 m³ t⁻¹ cane for six facilities in Mauritius. However, a large volume of water is contained in the fresh beet and cane which is removed during processing, so the net water consumption can be small or even negative. Cid Quintas²⁶ estimated the water consumption of a cane mill in Swaziland to be 0.9 m³ t⁻¹ sugar, whereas Nieto-Sandoval²⁷ showed that a cane facility in Tanzania produced a net excess of 4 m³ t⁻¹ sugar. Similarly, DeLorey²⁸ showed that, without recycling, a sugar beet facility in Idaho (USA) excess water produced by the facility was more than 10 times the freshwater input. Thaler et al.²⁹ estimated that 8% of the total water

consumption in European sugar production (beet) was in the processing phase. In terms of total volumes of water consumed therefore, the processing phase is almost negligible compared to the agricultural phase⁵.

The net water consumption can be expressed as a volume of water per unit output. In addition to sugar, there are several co-products - including bagasse, filter cake and molasses from cane and beet pulp - that have an economic value. Therefore the total water consumption must be allocated between the products according to their relative mass or values.³⁰ In this way, the total water consumption per unit of output ($\text{m}^3 \text{ t}^{-1}$) - sometimes referred to as the volumetric water footprint - can be estimated. Gerbens-Leenes and Hoekstra³¹ estimated the global average (blue) water consumption at 730 and 450 $\text{m}^3 \text{ t}^{-1}$ sugar for cane and beet respectively however, such figures conceal considerable local variability. Thaler et al.²⁹ for example, estimated the average blue water consumption of 59 sugar beet growing regions in Europe at 37 $\text{m}^3 \text{ t}^{-1}$ sugar.

The blue water consumed comes from different sources; from different locations around the world and at different times (seasons) and the total water consumption does not distinguish between the impacts associated with these different sources. For example, 1 m^3 of water withdrawn from a water-stressed catchment is likely to have a significantly higher impact on other water users than an equivalent volume taken from a catchment where water is abundant. It is therefore critical that the blue water consumption is put into the context of water availability in the place of withdrawal. Gerbens-Leenes and Hoekstra⁵ compared the blue water consumption for sugar beet and cane with water resource availability in the region of production. They identified three “hotspots” where large scale sugar production is taking place in river basins experiencing water stress; The Dnieper basin (Ukraine, beet) and the Indus and Ganges basins (India and Pakistan, cane).

Whereas “hotspot” mapping is essentially a qualitative process, the blue water consumption can be weighted according to quantitative assessments of the vulnerability of the water source to withdrawal. Such characterization factors have been based on human water requirements, water resources or environmental requirements³²⁻³⁴ which results in a range of indicators, developed with different scopes, which may or may not provide a consistent picture of water vulnerability. These indicators have been increasingly used in life cycle analyses

(LCA) of food crops and guidelines are being developed for the application of LCA to assessing impacts on water.³⁵

WATER QUALITY IMPACTS

Although discharge of wastewater, and management of agricultural nutrients, is closely regulated in many sugar producing regions, cultivation and processing of sugar crops has been shown to have had an adverse impact on water quality and aquatic ecosystems in a number of locations around the world, including Brazil³⁶, Swaziland³⁷ and India.³⁸ In the extreme case of Gorakhpur district of Nepal for example, discharge of improperly treated water from two sugar factories and a distillery into a stream rendered the stream's water unfit for drinking, bathing or irrigation.³⁹ Reports of pollution from beet sugar-processing effluents in Europe also include impacts on coastal ecosystems.⁴⁰

In relation to cultivation, the main considerations arise from runoff and leaching, which can lead to pollution of ground- and surface water with nutrients (notably nitrates and phosphates), agrochemicals, and sediments⁴⁰. Johnson et al.⁴¹ conclude that downstream impacts of any form of agriculture are largely governed by the periodicity, volume and intensity of rainfall. Although based on observations in Australian cane growing areas, this probably holds true for most other (particularly tropical) regions.

In relation to processing of sugar crops, the main consideration is pollution arising from the discharge of effluents from cane mills and beet factories. These effluents tend to be relatively rich in organic matter, including carbohydrates, when compared with those from other sources. Consequently, sugar processing effluents can represent pollutants with very high biological/chemical oxygen demands (BOD/COD), but other potential pollutants include suspended solids, heavy metals, oil/grease and cleaning agents.²⁴ In addition the pH and temperature of receiving waters can be affected with potential impacts on aquatic ecosystems. Hence, most factories treat water before discharge into water courses.

Accounting for water quality and related impacts on water resources is arguably even more complex and problematic than for water quantity due to many factors. These include: the various different types of pollutants coming from industrial facilities and agriculture; the interactions among pollutants; the status of the receiving water body; the variety of ways water

quality can be compromised. The various approaches to account for the resulting impacts to ecosystems and communities include: use of physico-chemical measurements,²⁵ environmental risk assessment; the “grey water footprint” approach,⁴² and LCA approaches.⁴³

The “grey water footprint” is the volume of freshwater that is required to assimilate the load of pollutants based on existing ambient water quality standards⁴² and is complementary to the traditional emission/effluent standards. Estimates of the impact in the growing phase of sugar production have concentrated on the leaching of nitrogen, which Gerbens-Leenes and Hoekstra³¹ estimated represents an additional 4% - 10% of the total (blue and green) water consumption of sugar crops. However, the grey water footprint is a theoretical volume that can only be calculated if the ambient water quality standard is known for a particular pollutant as well as its natural concentration in the receiving water

LCA indicators or measures for assessing potential impacts on water quality include ecotoxicity, eutrophication and acidification, which can cover the whole life cycle of a product or ingredient such as sugar, and provide a potential (midpoint) indicator of impact.^{30,44,45}

MITIGATING THE IMPACT OF WATER USE

It is important that all stages and their water use are properly considered to determine how the impact can be reduced. There are significant opportunities to reduce the negative impacts of the sugar crop cultivation which could also provide economic benefits for farmers through cost savings from more efficient resource use without necessarily implying reduced productivity and profits.

The volume of water consumed per unit output of sugar can be reduced by (i) increasing the output per unit of water or (ii) reducing the non-productive water losses.

(i) Increased output per unit of water consumed. At the biological level, because of the linear relationship between water consumption and dry matter production, a shift in WUE is difficult to achieve. Thus, within a particular environment, in well-managed crops that are performing near the biological optimum, improvements in WUE will probably be small. There is evidence that small but significant differences in WUE exist between sugar cane and beet varieties,^{46,47} although more work is needed to enable breeders to identify and select water efficient types in their breeding programmes. Careful management of irrigation has the potential

to save water in water stressed areas by matching the timing of irrigation to plant requirements. Controlled deficit irrigation at certain growth stages has been shown to increase irrigation water use efficiency in both beet⁴⁸⁻⁵⁰ and cane crops.⁵¹

In many farming situations, there are factors present that depress yield below potential and more than half of the variation in estimates of water use per ton sugar among countries presented by Mekonnen and Hoekstra²³ can be explained by differences in average yield - those with the highest yield per hectare have the lowest water use per ton and *vice versa*. Good management of soil, nutrients, pests and diseases can therefore have positive effects on WUE.

(ii) Reducing the non-productive water losses. Considering the denominator of the WUE ratio, water often can be managed in a way that reduces consumption without diminishing yield or farm profits. Crops that are slow to develop because of nutrient deficiencies, or when poor establishment leads to crop stands that are too sparse, greater soil surface is exposed to evaporation.^{52,53} This water loss does not benefit the growth of the crop, but nevertheless is counted as removal from the system.

Where crops are irrigated, water savings can be made by techniques including: improved methods of irrigation that deliver water to the roots of the plant with the minimum of loss and irrigation water delivery systems that reduce leaks and surface evaporation from canals and furrows.⁵⁴ The use of drip irrigation systems in place of furrow irrigation has been shown to deliver increased irrigation water use efficiency⁵⁵ and water savings of 40 – 50%.⁵⁶ The combination of drip irrigation with controlled deficit irrigation was shown to result in 25% water savings compared to sprinkler irrigation in irrigated sugar beet in Italy.⁵⁷

Improved soil management, in conservation agriculture, such as using mulch cover or minimum or no tillage techniques, can reduce the need for supplementary irrigation by encouraging deep rooting and increasing the water holding capacity of the soil, reducing water losses through soil evaporation and making more soil water available to the crop.⁵⁸

Water Quality

The leaching of nutrients can be minimised by good husbandry and reduced quantities of fertilizers applied. Increasingly sugar beet and cane growers are matching fertiliser applications to crop and soil characteristics, resulting in reduced application and leaching,⁵⁹

driven by high prices, environmental regulations and the impact of high nitrogen levels on processing quality.⁶⁰ In the EU27, the average fertilizer N-supply for sugar beet⁶¹ is 120 kg ha⁻¹ but there is scope to reduce this by using precision fertiliser placement techniques,⁶² which may allow for reductions of 10-20%.

Various measures can be taken and forms of treatment used to reduce the quantity and pollution potential of sugar-mill effluent without changing the water-treatment technology.⁶³ Water that is minimally contaminated from a late stage in the process may be re-used for an earlier stage that does not require such high quality or used for irrigation of the growing crop, reducing water withdrawals as well as the volume of effluent. Such measures are attractive, provided that large discharges of low concentration effluents are not simply replaced by smaller discharges of more concentrated effluents⁴⁰. Some companies have invested heavily in optimising use and re-use of water within factories⁶⁴ and using treated waste water for irrigation of crops surrounding the factory. Lacoste and Ribera⁶⁵ showed how sugar beet factories in Europe had decreased water consumption by one-third between 2001 and 2008 by improving factory water re-use and Žbontar Zver and Glavič⁶⁶ demonstrated how the water consumption of a sugar beet factory could be reduced by 69% by the use of water minimisation options. However, it is critical that the quality of the water does not result in adverse impacts on product quality or damage to the crop. For example, irrigation with cane effluent at high concentrations was found to suppress germination of peas.⁶⁷ Therefore water re-use is easier if wastewater streams with different water qualities are kept separate.

A range of techniques is available for treating sugar mill effluents, including the treatment of mill sludge with micro-organisms that accelerate the rate of decomposition⁶⁸ and constructed wetlands.⁶⁹ Treatment in an open fermentation chamber decreased wastewater COD by 82% in three days in a Polish sugar beet factory.³⁹ Zero pollution has been achieved in some Indian sugar mills by totally recycling treated effluents as make-up water for cooling towers and spray ponds.³⁹

DISCUSSION AND CONCLUSIONS

Although sugar production from beet has remained static, global production of sugar from cane has increased steadily over the past 50 years.⁴ Rising population, changing dietary

289 preferences and increasing use of sugar for ethanol production will mean that global demand for
290 sugar is likely to continue to increase and there will be a need to produce more sugar whilst
291 reducing the environmental impacts of production. Recent international initiatives point at the
292 need for decoupling economic growth from water use and environmental impacts.³⁴ The case
293 study of sugar in this paper provides some evidence of the need for and feasibility of decoupling
294 from a practical perspective.

295 The cultivation and processing of cane and beet to produce sugar can impact the local
296 water environment through depletion of water resources and degradation of water quality. The
297 largest potential impact on water resources is associated with the growing stage especially
298 where the crop is irrigated in river basins that experience high water scarcity. The net volume of
299 blue water consumed in the production of agricultural inputs, the processing of sugar and
300 transport is very small in comparison (<0.5% on average), but varies according to the
301 processing technology used and the degree of recycling. In some cases sugar processing
302 facilities may even be net water producers where the volume of water extracted from the crop
303 exceeds the loss of water due to evaporation.

304 There is significant potential to increase the productivity of water use in sugar crop
305 production by increasing the productivity of the crop. Plant breeding for water use efficiency
306 and drought tolerance can increase yield without increasing water use, whilst good agricultural
307 practices – including soil, water and nutrient management as well as pest and disease control –
308 can help to close the gap between actual and potential yields; reduce the water use per unit of
309 output; and reduce crop losses. The WUE of cane and beet are conservative and, due to the
310 climatic requirements of the two crops, they generally cannot be substituted in the same region,
311 however, the WUE could be increased (by plant breeding) and good irrigation water
312 management can reduce the non-productive water losses and therefore the volume of water
313 withdrawn per unit of production. Comparisons of total water consumption are potentially
314 misleading and it is important to separate green water consumption (with little impact) and blue
315 water consumption. Even so, the greatest impact on water resources is not necessarily associated
316 with the greatest blue water consumption, and local water scarcity and potential impacts on
317 livelihoods must be considered.

Both the growing of the crop and processing can have significant impacts on water quality. Currently there are several methods and approaches to assess the impact on water quality that yield different results. The assumption of a fixed percentage of nitrogen that is lost to leaching,³¹ for example, can lead to overestimation of the impacts in the agricultural stage.⁵⁹ Further efforts are needed to provide comparability and the link between different scales, as shown by the differences between the accounting methodologies, life-cycle and footprint assessments.³⁴ In the agricultural stage, potential impacts are diffuse in nature and difficult to manage, although the high level of management of nutrients in commercial agriculture can minimise the potential loss of nutrients to aquatic ecosystems. Discharge of wastewater from processing facilities is a point-source and can be managed by reducing wastewater volumes (by increased recycling within the facility) in combination with waste water treatment.

This paper has illustrated how the impact of cultivation and processing of food ingredients on the water environment can vary enormously depending on plant type, cultivation practices, climate and the local water resource status. In some places, where production is rainfed or sufficient water resources are available for irrigation, and good crop husbandry and processing technologies prevent discharge of contaminated water, production may be benign in relation to aquatic ecosystems. In others, it may be making a major contribution to local water scarcity and degradation, however, adoption of agricultural, water management and industrial technologies can mitigate these impacts.

ACKNOWLEDGEMENTS

This work was conducted by an expert group of the European branch of the International Life Sciences Institute (ILSI Europe). The authors would like to thank Prof. Dragan Savic (University of Exeter), who was a member of this expert group for his contribution to this work. The authors would like to thank and Dr Robert Hodgson (Booker Tate Ltd) for reviewing the manuscript. This publication was coordinated by Dr Alessandro Chiodini, Scientific Project Manager at ILSI Europe. The expert group received funding from the ILSI Europe Environment and Health Task Force. Industry members of this task force are listed on the ILSI Europe website at www.ils.eu. For further information about ILSI Europe,

please email info@ilsieurope.be or call +32 2 771 00 14. The opinions expressed herein and the conclusions of this publication are those of the authors and do not necessarily represent the views of ILSI Europe nor those of its member companies.

DECLARATION OF INTEREST

The authors declare no conflict of interest.

REFERENCES

1. Comprehensive Assessment of Water Management in Agriculture, *Water for Food, Water for Life: A Comprehensive Assessment of Water Management in Agriculture*. London: Earthscan, and Colombo: International Water Management Institute (2007)
2. Tilman, D, Balzer, C, Hill, J and Befort, BL, Global food demand and the sustainable intensification of agriculture. *Proceedings of the National Academy of Sciences of the United States of America*. **21**: 201116437 (2011)
3. USDA, *Sugar: World Markets and Trade*, US Department of Agriculture, Foreign Agricultural Service November 2012
<http://www.fas.usda.gov/psdonline/circulars/sugar.pdf> accessed 14 March 2013 (2013)
4. FAO, *Food and Agricultural Organization Statistical Database*. Retrieved 14 March (2013)
5. Gerbens-Leenes, PW and Hoekstra, AY, The water footprint of sweeteners and bio-ethanol, *Environment International*, **40**: 202-211 (2012)
6. Falkenmark, M Land-water linkages: A synopsis. In: TH Mather, ed. *FAO Land and Water Bulletin No. 1. Land and water integration and river basin management*. Food and Agriculture Organisation: Rome, Italy, pp15-16. (1995)
7. Erkin, AE, Aldaya, MM and Hoekstra, AY, Corporate Water Footprint Accounting and Impact Assessment. The Case of the Water Footprint of a Sugar-Containing Carbonated Beverage, *Water Resource Management*, **25**: 721–741 (2011)
8. Jefferies, D, Muñoz, I, Hodges, J, King, VJ, Aldaya, M, Erkin, A., Milà I Canals, L and Hoekstra, AY, Water footprint and life cycle assessment as approaches to assess

- potential impacts of products on water consumption. Key learning points from pilot studies on tea and margarine. *Journal of Cleaner Production*, **33**: 155-166 (2012)
9. Dunham, RJ and Brown, K, Water requirements of sugar beet. *Irrigation News* **12**: 61-72 (1987)
 10. Morillo-Velarde, R, Ober E, Water use and irrigation. In: Draycott A, editor. *Sugar Beet*. Oxford Blackwell Publishing; pp. 221-55 (2006)
 11. Thompson, G, Water use by sugarcane. *South African Sugar Journal* **60**: 593-635 (1976)
 12. Robertson, MJ, Inman-Barber MG, Muchow, RC, Opportunities for improving the use of limited water by the sugarcane crop. In: Keating, B.A., Wilson, J.R. (Eds). *Intensive Sugarcane Production: Meeting the challenges beyond 2000*. Wallingford, UK: CAB International, pp. 287-304. (1997)
 13. Werker, AR and Jaggard, KW, Dependence of sugar beet yield on light interception and evapotranspiration. *Agricultural and Forest Meteorology* **89**: 229-240 (1998)
 14. Carr, MKV, and Knox, JW, The water relations and irrigation requirements of sugar cane (*Saccharum officinarum*): a review. *Experimental Agriculture*. **47**: 1-25 (2011)
 15. Ghariani, S, *Impact of variable irrigation water supply on yield-determining parameters and seasonal water-use efficiency of sugar beets*. PhD thesis, University of California, Davis. (1981)
 16. Inman-Bamber, NG, Lakshmanan, P and Park, S. Sugarcane for water-limited environments: Theoretical assessment of suitable traits. *Field Crops Research* **134**: 95-104 (2012)
 17. Cock, J, Sugar cane growth and development. *International Sugar Journal* **105**: 540-552 (2003)
 18. Pearcy, RW and Ehleringer, J, Comparative ecophysiology of C3 and C4 plants. *Plant, Cell & Environment* **7**: 1-13 (1984)
 19. McGinn, SM and King, KM Simultaneous measurements of heat, water vapour and CO2 fluxes above alfalfa and maize. *Agricultural and Forest Meteorology* **49**: 331-49 (1990)

20. Boyer, J, Plant productivity and environment. *Science* **218**, 443-8 (1982).
21. Portmann, F, Siebert, S, Bauer, C and Döll, P Global dataset of monthly growing areas of 26 irrigated crops: version 1.0. Frankfurt Hydrology Paper 6, Institute of Physical Geography, University of Frankfurt (Main), Germany (2008)
22. Ridoutt BG & Pfister S, A revised approach to water footprinting to make transparent the impacts of consumption and production on freshwater scarcity, *Global Environmental Change*, **20**: 113–120 (2009)
23. Mekonnen, MM and Hoekstra, AY, The green, blue and grey water footprint of crops and derived crop products, *Hydrology and Earth System Sciences*, **15**: 1577-1600 (2011)
24. Ramjeawon, T, Cleaner production in Mauritian cane-sugar factories. *Journal of Cleaner Production*, **8**: 503-510 (2000)
25. Ingaramo, A, Heluane, H, Colombo, M, Cesca, M, Water and wastewater eco-efficiency indicators for the sugar cane industry. *Journal of Cleaner Production* **17**: 487-495 (2009)
26. Cid Quintas, P, *Calculation of the water footprint of the sugar produced in Swaziland*. MSc thesis. Cranfield University, UK. (2010)
27. Nieto-Sandoval Alcazar, JA, *Water footprint critical assessment at TPC sugar estate (Tanzania)*. MSc thesis. Cranfield University, UK (2010)
28. DeLorey, DC, Water Footprinting Sugar Beet Processing. 35th General Meeting of American Society of Sugar Beet Technologists. Florida. 27 Feb 2009. [http://assbt-proceedings.org/OPS/DeLorey_Factory.pdf] (2009)
29. Thaler S, Zessner M, De Lis FB, Kreuzinger N, and Fehring R, Considerations on methodological challenges for water footprint calculations. *Water Sci Technol*. **65**: 1258-64 (2012)
30. Renouf, MA, Pagan, RJ and Wegener, MK, Life cycle assessment of Australian sugarcane products with a focus on cane processing. *International Journal of Life Cycle Assessment* **16**: 125-137 (2011)

31. Gerbens-Leenes, PW and Hoekstra, AY, *The Water Footprint of sweeteners and bio-ethanol from sugar cane, sugar beet and maize*, Value of Water Research Report Series, No. 38, UNESCO-IHE, Delft, The Netherlands. (2009)
32. Brown, A and Matlock, MD *A review of water scarcity indices and methodologies*. White Paper #106. April 2011. The Sustainability Consortium (2011)
33. White, C, *Understanding water scarcity: Definitions and measurements*, GWF Discussion Paper 1217, Global Water Forum, Canberra, Australia. Available online at: <http://www.globalwaterforum.org/2012/05/07/understanding-water-scarcitydefinitions-and-measurements/>. Accessed 26/09/2012. (2012)
34. UNEP *Measuring water use in a green economy*. A Report of the Working Group on Water Efficiency to the International Resource Panel. United Nations Environment Programme, 2012. Available at http://www.unep.org/resourcepanel/Portals/24102/Measuring_Water.pdf Accessed 26/09/2012.
35. ISO, *ISO/DIS 14046 Environmental management -- Water footprint -- Principles, requirements and guidelines*. Draft International Standard. International Organization for Standardization, Geneva, Switzerland (2013)
36. Gunkel, G, Kosmol, J, Sobral, M, Rohn, H, Montenegro, S and Aureliano, J, Sugar cane industry as a source of water pollution - Case study on the situation in Ipojuca river, Pernambuco, Brazil. *Water, Air, and Soil Pollution*, **180**: 261-269 (2007).
37. Mhlanga, BFN, Ndlovu, LS and Senzanje, A, Impacts of irrigation return flows on the quality of the receiving waters: A case of sugarcane irrigated fields at the Royal Swaziland Sugar Corporation (RSSC) in the Mbuluzi River Basin (Swaziland). *Physics and Chemistry of the Earth*, **31**: 804-813 (2006).
38. Pawar, NJ, Pondhe, GM and Patil, SF, Groundwater pollution due to sugar-mill effluent, at Sonai, Maharashtra, India. *Environmental Geology*, **34**: 151-158 (1998).
39. WWF, *Sugar and the environment: Encouraging better management practices in sugar production*. World Wildlife Fund. 36 pp. (2004)
40. Cheesman, OD, *Environmental Impacts of Sugar Production: the Cultivation and Processing of Sugarcane and Sugar Beet*. CAB International, Wallingford, UK. (2004)

41. Johnson, LB, Richards, C, Host, GE and Arthur, JW, Landscape influences on water chemistry in Midwestern stream ecosystems. *Freshwater Biol.* **37**: 193–208 (1997)
42. Hoekstra, AY, Chapagain, AK, Aldaya, MM and Mekonnen, MM, *The water footprint assessment manual: Setting the global standard*, Earthscan, London, UK (2011)
43. Pfister, S, Koehler, A and Hellweg, S, Assessing the environmental impacts of freshwater consumption in LCA. *Environmental Science & Technology* **43**: 4098–4104 (2009)
44. Renouf, MA, Pagan, RJ and Wegener, MK, Life cycle assessment of Australian sugarcane products with a focus on sugarcane growing. *International Journal of Life Cycle Assessment* **15**: 927-930 (2010)
45. Ramjeawon, T, Life cycle assessment of cane-sugar on the island of Mauritius. *International Journal of Life Cycle Assessment* **9**:254-260 (2004)
46. Rajabi, A, Ober, ES, Griffiths, H, Genotypic variation for water use efficiency, carbon isotope discrimination, and potential surrogate measures in sugar beet. *Field Crops Research* **112**: 172-81 (2009)
47. Olivier, F and Singles, A, Water use efficiency of irrigated sugarcane as affected by row spacing and variety. *Proc. S. Afr. Sug. Technol. Assoc.* **7**: 347-51 (2003)
48. Fabeiro, C, Martín de Santa Olalla, F, López, R Domínguez, A, Production and quality of the sugar beet (*Beta vulgaris* L.) cultivated under controlled deficit irrigation conditions in a semi-arid climate, *Agricultural Water Management* **62**: 215-227 (2003)
49. Morillo-Velarde, R, Regulated deficit irrigation in autumn sown sugar beet. *International Sugar Journal* **109**: 245-250 (2007)
50. Dean Yonts, C, Development of season long deficit irrigation strategies for sugarbeet. *International Sugar Journal* **113**: 728-731. (2011)
51. Wiedenfeld, B, and Enciso, J, Sugarcane responses to irrigation and nitrogen in semiarid South Texas. *Agronomy Journal* **100**: 665-671 (2008)
52. Ballif, JL and Dutil, P, Lysimeter studies in undisturbed chalky soil .1. drainage, evaporation and role of plant cover - results 1973-1980. *Agronomie* **3**: 857-866 (1983)

53. Abbott, CL, and Ah Koon, PD, Contrasting soil-moisture environments beneath sugar-cane drip irrigated during the day, and at night. *Agricultural Water Management* **22**: 271-279 (1992)
54. Hess, TM and Knox, JW, Water savings in irrigated agriculture – a framework for assessing technology and management options to reduce water losses. *Outlook on Agriculture* **42**: 85–91 (2013).
55. Hassanli, AM, Ahmadi-rad, S and Beecham, S, Evaluation of the influence of irrigation methods and water quality on sugar beet yield and water use efficiency. *Agricultural Water Management* **97**: 357-362 (2010)
56. Shekinah, DE, Gupta, C, Sundara, B and Rakkiyappan, P, Effect of drip irrigation, planting methods and fertigation on yield, quality and water use efficiency of sugarcane (saccharum species hybrid) *International Journal of Agricultural and Statistical Sciences* **8**: 691-696 (2012)
57. Tognetti, R, Palladino, M, Minnocci, A, Delfine, S and Alvino, A, The response of sugar beet to drip and low-pressure sprinkler irrigation in southern Italy. *Agricultural Water Management* **60**: 135-155 (2003)
58. Gascho, GJ, Water-sugarcane relationships. *Sugar Journal* **48**: 11-17 (1985)
59. Nähle, C and Kunz M, Water Footprint: A critical review using sugar production as an example. *Sugar Industry*. **137**: 159-168 (2012)
60. Anderson, FN and Peterson, GA, Effect of Incrementing Nitrogen Application on Sucrose Yield of Sugarbeet. *Agronomy Journal* **80**: 709-712 (1988)
61. Klenk, I, Landquist, B and de Imana, OR, The product carbon footprint of EU beet sugar. *Sugar Industry* **137**: 169-177 (2012)
62. IIRB, *Sugar Beet in Europe: An environmentally friendly crop for sustainable plant production systems*. International Institute for Beet Research. (2004)
63. Urbaniec, K and Wernik, J, Identification of opportunities to save water in a beet sugar factory. *Zuckerindustrie* **127**: 439-443 (2002)

64. Dilek FB, Yetis U, and Gökçay CF, Water savings and sludge minimization in a beet-sugar factory through re-design of the wastewater treatment facility. *Journal of Cleaner Production* **11**: 327-31 (2003)
65. Lacoste, E and Ribera, M-C, *The EU Beet and Sugar Sector: a model of environmental sustainability*. Report by the International Confederation of European Beet Growers and Comité Européen des Fabricants de Sucre (2010)
66. ŽbontarZver, L and Glavič, P, Water minimization in process industries: case study in beet sugar plant. *Resources Conservation and Recycling*. **43**:133-145 (2005)
67. Tewari, DD, ArchanaTripathi, Tewari, MP and Srivastava, RR Effect of sugar factory effluents on seed germination and seedling growth of Pisumsativum (var. Arkel & Asauji) in Balrampur District. *Flora and Fauna (Jhansi)* **6**: 31-32 (2000)
68. Abraham, J and Nanda, S, Treatment of sugar mill effluents with cyanobacteria. *Journal of Pure and Applied Microbiology* **4**: 791-795 (2010)
69. Bojcevska, H and Tonderski, K, Impact of loads, season, and plant species on the performance of a tropical constructed wetland polishing effluent from sugar factory stabilization ponds. *Ecological Engineering* **29**: 66-76 (2007).

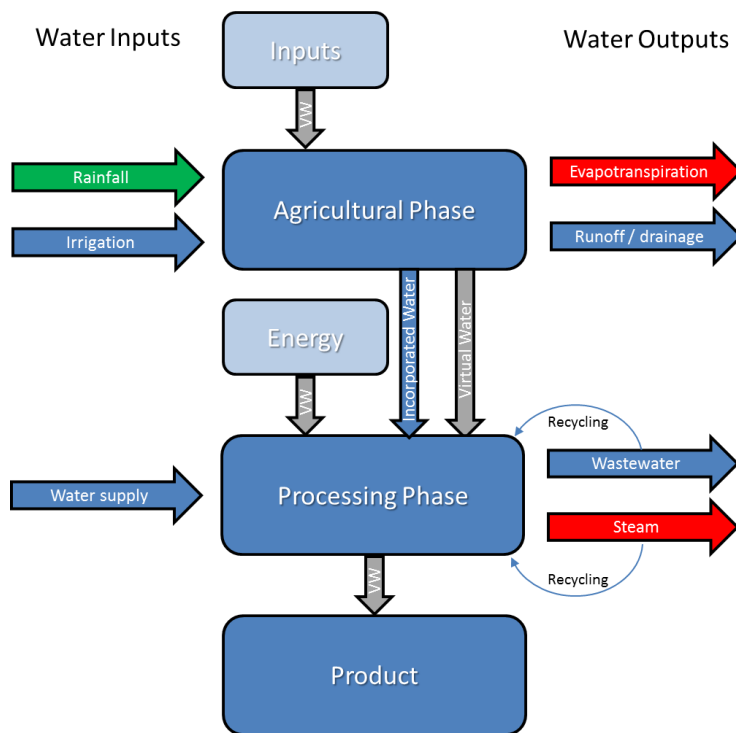


Figure 1 Water use in the sugar supply chain, differentiating between green and blue water inputs, virtual water flows (shown in grey) and water consumption (shown in red).



DSPACE

<https://dspace.org/>

Understanding the impact of crop and food production on the water environment using sugar as a model

Hess, Tim M.; Aldaya, Maite; Fawell, John; Franceschini, Helen; Ober, Eric ...

2013-09-19

Wiley

<http://dx.doi.org/10.1002/jsfa.6369>

Hess, T. M. et al. (2013) Understanding the impact of crop and food production on the water environment using sugar as a model, Vol. 94, Iss. 1, pp. 2-8