

Assessment of heat mitigation capacity of urban greenspaces with the use of InVEST Urban Cooling model, verified with day-time land surface temperature data

J.E. Zawadzka^{1*}, ¹, J.A. Harris¹, R. Corstanje¹

¹ Centre for Environmental and Agricultural Informatics, School of Water, Energy and Environment, Cranfield University, Bedfordshire, UK, MK43 0AL

*Corresponding author: joanna.zawadzka@cranfield.ac.uk

Highlights

InVEST Urban Cooling model was validated with day-time land surface temperature data

Heat mitigation index adequately approximates LST at 30m resolution

The index is sensitive to cooling distance and spatial resolution of the analysis

InVEST Urban Cooling model can support decisions at masterplan level

Keywords

InVEST Urban Cooling model, urban heat island, temperature regulation, heat mitigation, land surface temperature

Introduction

Urban areas are affected by the urban heat island (UHI) effect, whereby ambient temperatures of towns and cities are generally warmer than in the surrounding rural environments (Oke, 1976). The UHI effect is associated with detrimental effects on human health (e.g. Heaviside, Macintyre, & Vardoulakis, 2017; Heaviside, Vardoulakis, & Cai, 2016), increased energy consumption for air conditioning (Santamouris, Cartalis, Synnefa, & Kolokotsa, 2015), increased occupational heat stress (Casanueva et al., 2020; Kjellstrom, Freyberg, Lemke, Otto, & Briggs, 2018), and changes to ecological cycles (Yow, 2007). Moreover, maintaining thermal comfort of urban inhabitants within public spaces has been proven essential for stimulation of physical activity and public life within cities (Elliott, Eon, & Breadsell, 2020). The incidence of heatwaves is expected to rise in frequency and intensity this century (Perkins, Alexander, & Nairn, 2012; Wouters et al., 2017), which, together with the anticipated growth of urban inhabitants to 68% of global population by year 2050 (United Nations, 2019), highlight the need for rapid implementation of heat mitigation measures across cities in order to avoid or reduce their negative impacts.

The urban thermal environment is often described in the context of the formation of the UHI or surface urban heat islands (SUHI). The UHI is a phenomenon originally conceived as occurring at night, moderated through radiative fluxes of sensible and latent heat, the former characteristic of the urban built environment and associated with increased air temperatures and the latter – of vegetated surfaces, associated with cooling properties (Lin, Gou, Lau, & Qin, 2017; Oke, 1988). The formation and intensity of the UHI effect is governed by complex interactions between multiple factors that include decreased long-wave radiation loss from and multiple reflections of short-wave radiation between buildings, increased storage of sensible heat in the urban fabric, decreased evapotranspiration due to low vegetation coverage as compared to rural areas, anthropogenic heat sources, and air pollution (Oke, Johnson, Steyn,

& Watson, 1991). The SUHI relates to the temperature of the urban land surface and is associated with the UHI through modulation of air temperature at the lowest layers of the atmosphere (Voogt & Oke, 2003), however, with differences induced through air advection (Wang, Yao, & Shu, 2020), and being more prominent during the day (Roth, Oke, & Emery, 1989).

In urban planning, excess heat mitigation is primarily concerned with regulation of microclimates at pedestrian or building scales (Erell, 2008) that could be related to the street or site (micro-scale) levels (Norton et al., 2015). Whilst pedestrian scales mostly relate to the creation of outdoor spaces providing thermal comfort to humans, building scales focus on measures leading to energy conservation in buildings. Multiple typologies of (S)UHI mitigation methods exist (Aleksandrowicz, Vuckovic, Kiesel, & Mahdavi, 2017; Kleerekoper, van Esch, & Salcedo, 2012; Meng, 2017; Sung, 2013), and include introduction of strategically distributed vegetation and water bodies across the landscape, termed green and blue infrastructure (European Commission, 2013; Gunawardena, Wells, & Kershaw, 2017), which reduce surface and air temperatures through shading, evapotranspiration, and evaporation. These effects are detectable at a distance away, both in the case of air as well as surface temperatures (Aram, Higuera García, Solgi, & Mansournia, 2019), with distances dependant on specific morphologies of the neighbourhoods, among other factors. Incorporation of green infrastructure as a (S)UHI mitigation measure into urban plans generates an opportunity to introduce ecosystem services, i.e. benefits humans derive from nature (Millennium Ecosystem Assessment, 2005), other than local temperature regulation into the urban landscapes, which requires assessment of benefits derived from them, both in biophysical and economic terms (Cortinovis & Geneletti, 2019).

Biophysical assessments of heat mitigation capacity of vegetation can be carried out through air temperature measurements (Bowler, Buyung-Ali, Knight, & Pullin, 2010), analysis of

remotely sensed land surface temperature (LST) imagery (Zhou et al., 2019), or simulations of urban thermal environment (Tsoka, Tsikaloudaki, Theodosiou, & Bikas, 2020) – approaches that require substantial academic expertise that is rarely available in many planning departments (Bherwani, Singh, & Kumar, 2020; Norton et al., 2015). An example of a recently developed model dedicated to a simplified assessment of the UHI mitigation capacity of vegetation, which has a potential to bridge this gap, is the Urban Cooling model available from a wider suite of ecosystem services modelling tools called InVEST (Integrated Valuation of Ecosystem Services and Trade-offs) developed by the Natural Capital Project (Sharp et al. 2020). InVEST comprises a suite of spatially-explicit ecosystem services models covering terrestrial, freshwater, marine and coastal ecosystems that are aimed at the assessment of synergies and trade-offs between different management options of natural resources leading to the determination of areas where investment can enhance both human development and environmental conservation.

The Urban Cooling model calculates the heat mitigation index (HMI) based on evapotranspiration from vegetation, cooling distance of large urban parks, and albedo assigned to a land cover (LC) map, which is then used to estimate average cooling capacity on air temperature and monetary value associated with the vegetative cooling, and as such is the key model output determining the accuracy of subsequent evaluations. Consequently, the goal of this study was to validate the representativeness of the HMI returned by the InVEST 3.8.7 Urban Cooling model of urban thermal environment as depicted by LST imagery captured on a warm summer day, at spatial resolutions relevant to micro- and broad-scale assessments: 2 and 30m. We therefore hypothesised that the HMI generated by the InVEST 3.8.7 Urban Cooling model can be used as a substitute for LST mapping in assessment of the cooling capacity of urban greenspaces under an assumption that low HMI values should correspond to highest temperatures in the LST image with the opposite being true for the high values of HMI.

We next estimated the amount of change in LST due to gradual change in the HMI for model outputs with the highest resemblance to the LST data as indicated by the highest value of R^2 . Our analysis was carried out using an example of three sub-urban towns collectively characterised with a high variety of urban form, and is one of the first studies aiming at validation of the InVEST 3.8.7 Urban Cooling model.

Materials and Methods

Study Area

The study area comprises three towns located in a relatively close proximity in England: Milton Keynes ($52^{\circ}0'N$, $0^{\circ}47'W$, appr. 122 km²), Bedford ($52^{\circ}8'N$, $0^{\circ}27'W$, appr. 60 km²), and Luton/Dunstable ($51^{\circ}52'N$, $0^{\circ}25'W$, appr. 86 km²) (Figure 1) with population of 229,941, 106,940, and 258,018 (Office for National Statistics, 2013) respectively and a temperate oceanic climate according to the Köppen–Geiger climate classification system with the highest monthly average air temperatures of approximately 22 °C in July and lowest temperatures of approximately 1 °C observed in February, and the average annual precipitation of 598, 657, and 712 mm for Bedford, Milton Keynes and Luton respectively. The three towns are characterised with contrasting histories: modern-day garden-city, medieval, and industrial, respectively, collectively representing a wide range of urban form patterns representative of British towns (Grafius et al. 2016) and allowing for evaluation of Urban Cooling model's performance in towns with various morphologies. Milton Keynes is a recently designed Garden City abundant in parks, greenspaces and water bodies, characterised by a grid of dual-carriageways dissecting the town into clearly defined neighbourhoods. Bedford is a medieval market town characterised with densely built-up city centre with several parks and residential areas located at the outskirts. Luton, on the other hand, is an industrial-era town characterised with a modern densely built-up city centre and residential areas composed of terraced housing.

The differing histories and urban form patterns of the three towns reflect on their land cover distribution (Table 1). Major differences in LC composition of the towns, as assessed from the high-resolution land cover maps available in this study and described in more detail in Section 2.2.2, comprise the lowest abundance of greenspaces and the highest of impervious areas in Luton, and the largest extent of greenspaces and water bodies in Milton Keynes.

Table 1 Land cover composition and patch size (mean and standard deviation) of main land cover types within Bedford (BD), Luton (LT) and Milton Keynes (MK) summarised for the built-up area extents of the towns from the land cover maps available in this study.

LC		LC area [% of total town area]			Patch size [m ²]					
		BD	LT	MK	BD		LT		MK	
					Mean	Std.	Mean	Std.	Mean	Std.
Buildings	B	18.8	16.1	12.1	160	529	154	918	178	896
Grass - Short <0.5m	G	28.4	21.3	28.5	49	823	48	1108	68	1327
Shrub/Tall Grass/Hedge (0.5 - 2m)	SGH	9.9	7.7	7.7	13	24	13	26	14	37
Broadleaf Trees >2m tall	Tb	24.7	18.0	22.7	49	462	52	935	69	1174
Coniferous Trees >2m tall	Tc	0.3	N/A	4.0	84	255	N/A	N/A	55	267
Paved	P	35.6	36.8	34.1	122	7648	156	45672	124	44987
Water	W	1.2	0.1	3.0	283	2115	96	432	640	9899

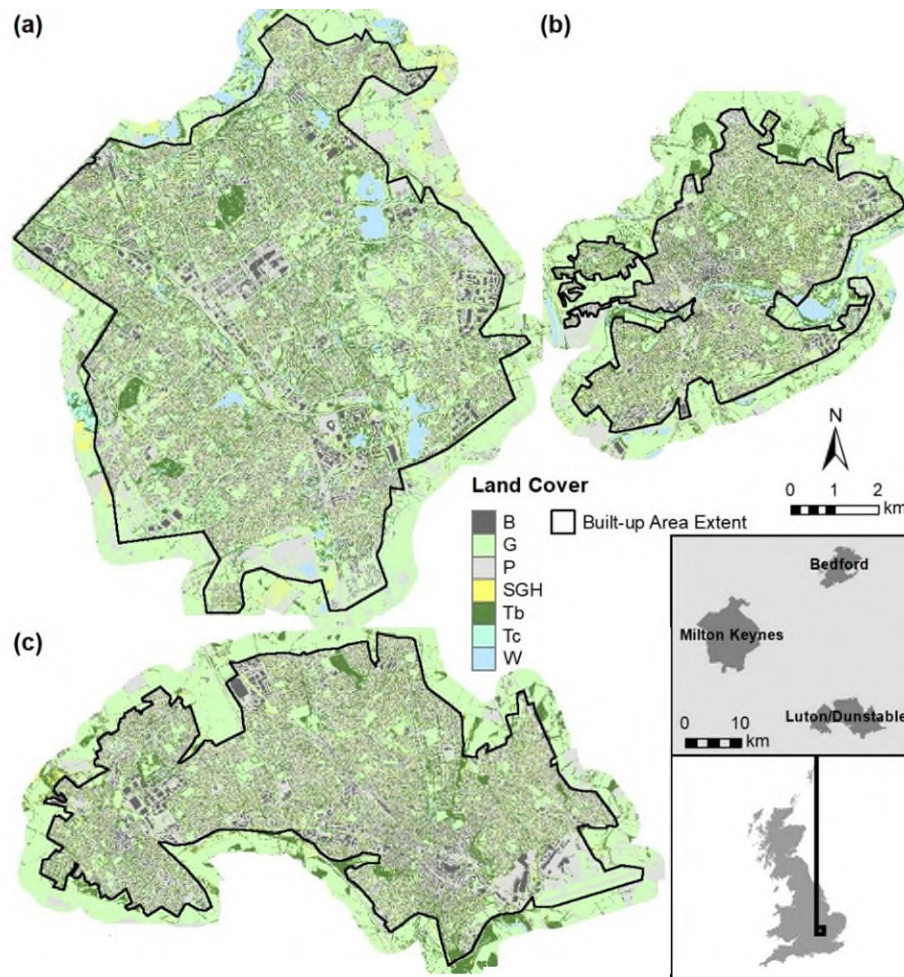


Figure 1 Land cover in (a) – Milton Keynes, (b) – Bedford, (c) – Luton/Dunstable. The insert depicts location of the towns within Great Britain. B – buildings, G – grass, P – paved, SGH – short trees/tall grass/hedge, Tb – broadleaf trees, Tc – coniferous trees, W – water.

Materials and Methods

The following sections explain the main assumptions of the InVEST 3.8.7 Urban Cooling model leading to the generation of raster maps of the heat mitigation index (HMI) as well as steps undertaken to assess the strength of the relationship between the HMI and land surface temperature data available for the three towns. The map of the HMI is the key output of the model from which tabular estimates of average cooling capacity, average air temperature and air temperature anomaly together with the value of the heat reduction services by urban green infrastructure are derived by the model.

InVEST Urban Cooling model

The InVEST 3.8.7 Urban Cooling model generates maps of the heat mitigation index (HMI) that estimates the cooling capacity of urban greenspaces on all LC classes present in the study area by taking into account the cooling capacity of larger urban parks extending beyond their boundaries (InVEST 3.8.7 User Guide). The functionality of the model is based on and expands upon the methodology for the estimation of cooling capacity of urban green infrastructure, encompassing LC features such as grass, trees, green walls/roofs and water, in the planning context proposed by Zardo et al. (2017).

In the Urban Cooling model, cooling capacity (CC) is calculated as a weighted function of shading (S), evapotranspiration index (ETI) and albedo (A) (Equation 1), the latter constituting an extension to the method presented by Zardo et al. (2017). Albedo expresses the proportion of solar radiation reflected by land surface, and is therefore representative of the amount of solar heat than can be absorbed by surface materials, with lower absorption, i.e. higher albedo, associated with lower land surface temperature (Phelan et al., 2015).

Equation 1

$$CC = 0.6 \cdot S + 0.2 \cdot ETI + 0.2 \cdot A,$$

Where: CC – cooling capacity index, ranging from 0 to 1, with 0 as no cooling capacity, and 1 maximum cooling capacity within the study area, S – capacity of trees to provide shading, set to 1 for trees taller than 2 metres or 0 for trees below the 2 metre cut-off, ETI – evapotranspiration index, calculated from Equation 2, A – albedo, ranging from 0 to 1, with 1 indicating maximum reflectance of solar radiation, and 0 – maximum absorption.

ETI is the normalised value of evapotranspiration across the study area calculated as actual evapotranspiration (ET_a) divided by the maximum value of ET_0 within the study area (ET_{max}) (Equation 3). ET_a is calculated as potential evapotranspiration ET_0 modified by the value of

crop coefficient K_c determining the fraction of ET_0 evaporated by specific type of land cover (Equation 3).

Equation 2

$$ETI = \frac{ET_a}{ET_{max}}$$

Equation 3

$$ET_a = ET_0 \cdot K_c$$

Potential evapotranspiration ET_0 was calculated from the modified Hargreaves equation (Equation 4) (Droogers & Allen, 2002).

Equation 4

$$ET_0 = 0.0013 \cdot 0.408 \cdot RA \cdot (T_{avg} + 17) \cdot (TD - 0.0123 \cdot P)^{0.76},$$

Where: ET_0 – reference evapotranspiration, [mm d^{-1}], RA – extra-terrestrial radiation, estimated as $41.6 \text{ MJ m}^{-2}\text{d}^{-1}$, equivalent to RA of the 15th day of June at 52°N in Allen et al.(1998), P – Precipitation [mm], T_{avg} – the average of the daily minimum and daily maximum temperatures [$^\circ\text{C}$], TD – the difference between daily maximum and mean daily minimum temperatures [$^\circ\text{C}$].

The HMI is equivalent to cooling capacity derived for each grid cell of the land cover map submitted to the model based on several conditions. These conditions distinguish between grid cell location within a large greenspace (over 2ha in size), location within a cooling distance away from large greenspaces, and location outside of the cooling zone of influence, indicated by the cooling distance, of large greenspaces on temperature (Equation 5).

182

183 Equation 5

$$184 \quad HMI_i = \begin{cases} CC_i & \text{if } CC_i \geq CC_{Park_i} \text{ or } GA_i < 2ha \\ CC_{Park_i} & \text{otherwise} \end{cases},$$

185 Where: HMI_i – heat mitigation index value at grid cell i , CC_i – cooling capacity of grid cell i ,
 186 calculated from Equation 1, CC_{Park_i} – cooling capacity calculated as distance weighted average
 187 of the CC values from green spaces (Equation 7), GA_i – the amount of green areas within a
 188 search distance d_{cool} around each pixel (Equation 6).

189 Equation 6

$$190 \quad GA_i = cell_{area} \cdot \sum_{\substack{j \in d \text{ radius} \\ \text{from } i}} g_j,$$

191 where: GA_i – the amount of greenspaces around grid cell i within a radius defined by cooling
 192 distance d_{cool} , $cell_{area}$ – area of grid cells j within the input raster land cover map, expressed in
 193 hectares, g_j – a switch assuming the value of 1 if a grid cell located within the cooling distance
 194 radius represents greenspaces, otherwise set to 0.

195 Equation 7

$$196 \quad CC_{Park_i} = \sum_{\substack{j \in d \text{ radius} \\ \text{from } i}} g_j \cdot CC_j \cdot e^{\left(\frac{-d(i,j)}{d_{cool}}\right)},$$

197 Where: CC_{Park_i} – cooling capacity assigned to areas located within the cooling distance radius
 198 d_{cool} from large greenspaces ($>2h$ in size), calculated as the weighted average of the distance
 199 between cells i and j , $d(i,j)$ – distance between cells i and j located within the cooling distance
 200 radius.

The Urban Cooling model can also be used to estimate night-time heat mitigation for buildings, air temperature anomalies as well as economic value of heat mitigation by urban greenspaces, however, these functions are derivative from the HMI and are not covered in this study.

Model parameterisation and data sources

The primary input required by the InVEST 3.8.7 Urban Cooling model is a land use/land cover map, classes of which are attributed with parameters required for the calculation of the HMI. In this study, a 2m spatial resolution LC map in a raster format was used. The map was collated for the purpose of previous studies (Grafius, Corstanje, Siriwardena, Plummer, & Harris, 2017; Grafius et al., 2016, 2019) from three datasets: NDVI-derived locations of grass and trees generated from colour-infrared aerial photography at 0.5m spatial resolution available from LandMap Spatial Discovery project (<http://learningzone.rspsoc.org.uk/>) and captured between 2007 and 2010, footprints of buildings and paved areas captured by a large-scale topographic map (Ordnance Survey MasterMap with the latest updates applied in December 2011), and feature heights acquired from a LiDAR data survey of the three towns in 2012. The parameters assigned to each LC class include potential evapotranspiration ET_0 , evapotranspiration coefficient (K_c), albedo, cooling distance away from large greenspaces, as well as greenspace and shading switches (ble 2). Precipitation and temperature data needed for the ET_0 estimation were obtained from the HadUK-Grid Gridded Climate Observations on a 1km grid over the UK (MetOffice, 2019) for 8 June 2013 and calculated as a mean value for each town. Evapotranspiration coefficients assigned to the main LC classes present in the study area were approximated from existing guidance on crop evapotranspiration calculation (Allen et al., 1998) whose use is advised by the InVEST User Guide. In all cases, mid-season values of K_c were selected, which aligned well with well-developed vegetation in the three towns in early June. K_c for grass, coniferous trees and water could directly be estimated from the guidance as values for turf grass, coniferous trees and temperate climate water bodies respectively. The

guidance did not include the evapotranspiration coefficient for broadleaved trees and therefore it was approximated by K_c for apple orchards without ground cover, which was deemed appropriate due to the very high resolution of the LC map available in this study capable of depicting single trees without their surrounding land cover. Buildings and paved areas were assigned a very small value of K_c (0.001) to avoid creation of empty grid cells in the intermediary outputs of the model – a setting recommended for other models included in the InVEST tool, such as the Seasonal Water Yield model. Albedo values for each LC class were estimated from the list of typical values in Taha et al. (1988), assuming highest absorption of solar radiation by water followed by paved areas due to dark colour of asphalt roads, and lowest for buildings, with vegetated areas taking intermediary values. Following the methodology for cooling capacity estimation presented by Zardo et al. (2017) that included evaporative cooling of water bodies as well as vegetation, the greenspace switch was assigned not only to grassed and treed LC classes but also water, resulting with model runs capturing cooling capacity of vegetation only (V) or water and vegetation (W&V) (Figure 2). Three cooling distances away from large greenspaces were considered: 100m, 200m, and 300m, which approximated distances reported in literature regarding the cooling capacity of urban parks, ranging between 20 and 440m (Aram et al., 2019; Vaz Monteiro, Doick, Handley, & Peace, 2016).

ble 2 Key parameters assigned to each land cover class within the study area submitted to the model as the biophysical table.*Separate runs of the model were carried out where water was treated as the greenspace to include its evaporative cooling capacity in the calculation of the HMIx for each town.

LC	Description	Shade	K_c	Albedo	Greenspace
B	Buildings	0	0.001	0.25	0
G	Grass - Short <0.5m	0	0.95	0.16	1

SGH	Shrub/Tall Grass/Hedge (0.5 - 2m)	0	0.95	0.18	1
Tb	Broadleaf Trees >2m tall	1	0.95	0.2	1
Tc	Coniferous Trees >2m tall	1	1	0.15	1
P	Paved	0	0.001	0.14	0
W	Water	0	0.6525	0.09	0 or 1*

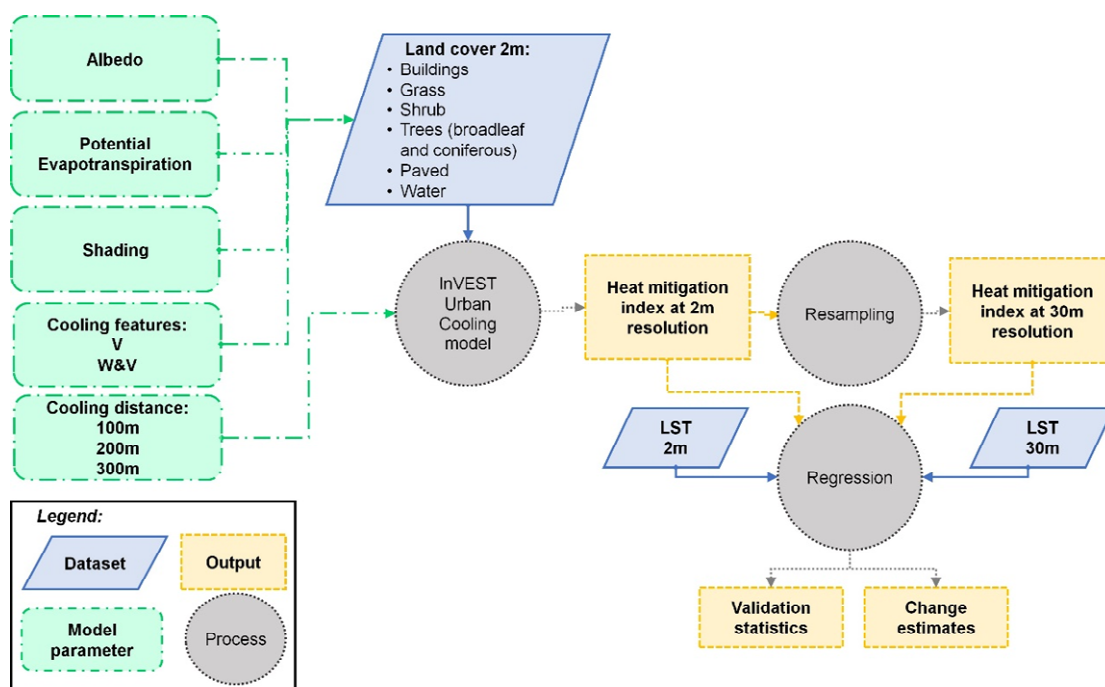


Figure 2 Schematic of the methodology undertaken to assess the representativeness of the heat mitigation index derived from land cover maps with different cooling distance and cooling features settings in relation to land surface temperature (LST). V – vegetation, W – water.

Additional settings required by the model included the air temperature reference value and the UHI magnitude, which were set to the minimum air temperature observed within a 10km radius away from each town and the difference between maximum air temperature value within each

town and the reference value, all captured from the HadUK-Grid Gridded Climate Observations on a 1km grid over the UK (MetOffice, 2019) dataset. Air mixing distance was kept as the default value of 2000m. Whilst these settings were required for the model to run, they did not affect the HMI values returned by the model that are subject of this study.

Verification of model outputs

The heat mitigation maps obtained from InVEST 3.8.7 Urban Cooling model were compared to LST data available for 8 June 2013 for the three towns. LST maps were available at two spatial resolutions: 2(4)m and 30(100)m, for simplicity referred to as 2 and 30m throughout the manuscript. The coarser resolution LST image was obtained from Landsat 8 thermal infra-red bands using split-window algorithm (Jimenez-Munoz, Sobrino, Skokovic, Mattar, & Cristobal, 2014). Its mixed spatial resolution stems from the fact that the Landsat 8 thermal infra-red data are captured at 100m resolution and are subsequently resampled to 30m resolution by the data provider (USGS). The finer resolution image was generated from the Landsat 8 LST map through a downscaling procedure (Reference removed for anonymity) whereby coarse resolution LST was related through a multivariate adaptive regression splines algorithm to spectral indices at 2 and 4m resolution to produce the fine resolution images across the three towns.

The comparison between the HMI and LST data was carried out with the use of the ordinary least squares (OLS) linear regression for the area encompassed within the built-up area boundary (Figure 1) that was manually digitised from aerial imagery used to generate the LC maps available in this study and representing a distinction between areas considered as urban and the rural background of fields and pastures. Whilst the HMI maps that were generated at 2m resolution by the model could directly be compared to the 2(4)m resolution LST images, the comparison to 30(100)m LST data required that the HMI datasets were resampled to match

the mixed spatial resolution of the satellite-derived LST maps. This was done through the reproduction of the post-processing procedure for the Landsat 8 TIR bands captured by the sensor at 100m resolution by first upscaling of the 2m HMI to 100m using a mean function within a 100m x100m focal moving window and subsequent resampling, using the cubic convolution method, to 30(100)m with GIS procedures implemented in ESRI ArcGIS 10.6. Resampling of the 2m resolution HMI maps to 30m resolution allowed for direct comparisons with 30(100)m resolution LST datasets using linear regression as both maps carried signals of thermal response of all land cover types present within the coarse-resolution pixels without the need for multiple regression accounting for each land cover type located within the pixels. Ultimately, twelve HMI maps were generated for each town, accommodating for three different cooling distances away from large vegetated patches: 100, 200, and 300m; two sets of cooling features: V or W&V; and two spatial resolutions of the outputs: 2 and 30m.

Results

Validation with LST data

City-wide assessment

Ordinary least squares regression analysis between spatially distributed values of the HMI index and LST revealed that the Urban Cooling model managed to reflect some portion of variation in thermal response of the land surface, however, the strength of the association depended on various factors considered in this study (

Table 3 and Figure 3). The largest differences in the coefficient of determination R^2 were observed for regressions at different spatial resolutions, with associations between datasets at 30m being at least twice as strong as at 2m in Bedford and Luton, however, very similar in Milton Keynes. Whilst the generally higher R^2 values at 30m resolution could be attributed to the introduction of a greater variance of values into the HMI maps during resampling from 2m to 30m resolution, the different behaviour in Milton Keynes could potentially be caused by the distinct morphology of this town, being designed as a Garden City and consequently containing distinctly larger patches of grass, trees and water than the remaining towns.

In all towns, the cooling distance of 100m resulted in higher R^2 values, however, inclusion of water bodies as cooling features had a varied effect on the strength of associations between the HMI and LST. The highest increase in R^2 values was observed in Milton Keynes, followed by Bedford, and no increase was observed in Luton, which can be explained by the decreasing proportion of water in LC of these cities, respectively. Whilst the changes in R^2 are only marginal at 2m resolution, they are distinct for data at 30m resolution, which could be attributed to the increased variance of HMI values resulting from the resampling.

The HMI values derived at 100m cooling distance were distinctly lower than for the distances of 200m or 300m tested here (Tables 1 and 2, Supplementary Materials). Although increasing HMI values with increasing cooling distances of large greenspaces is expected, the difference observed in our study stems also from the fact that the cooling distance parameter set within the model by the user is also used to determine the radius of a circular search window used to calculate the sum of the greenspace area to detect large greenspaces. Consequently, increasing cooling distance corresponded to a growing abundance of greenspaces classified as large, defined by size over 2ha, which in the case of the three towns considered here meant that all patches of grass or trees were classed as large for the 200 and 300m distances (Figure 3 Supplementary Materials). Nevertheless, large greenspaces determined by models run for the

100m cooling distance were realistically distributed across the three towns, assuring validity of the presented results.

The differences in the HMI due to various model parameterisation explored in this study are easily discernible visually (Figure 4 and Figures 1-3 in Supplementary Materials **Error! Reference source not found.**). Maps created for the 100m cooling distance away from large greenspaces depict lower HMI values in buildings and paved areas than maps generated with larger cooling distances displaying greater variability of HMI values within those LC classes. The sharper delineations of the HMI at 100m than 200 or 300m distances are resultant from the overestimation of the abundance of large greenspaces by the model (Figure 4 Supplementary Materials). Whilst maps at 2m resolution generated with 100m cooling distance showed very little variation in HMI values within areas covered by grey infrastructure as compared to the 2m resolution LST map, resampling to 30m resulted in a greater variability of the HMI values and an overall greater resemblance to the LST map at this resolution. HMI maps generated with 200m and 300m cooling distances appeared similar regardless of spatial resolution, however, depicting a lower contrast in HMI values between green, blue and grey LC with increasing cooling distance. Moreover, inclusion of cooling capacity of water bodies in the calculation of the HMI significantly increased their resemblance to LST maps at all cooling distances and spatial resolutions by increasing its values in areas corresponding to low LST of water bodies. Finally, portions of the HMI maps extending beyond the built-up area boundaries marking the area subjected to the regression analysis depicted high heat mitigation values, which corresponded well to the lower observed LST in maps at 30m resolution. Inclusion of the LC data margin extending beyond the built-up area boundary in the model runs allowed for quantification of cooling effects of the vegetation growing in the rural background of the towns.

Table 3 The outcomes of linear regression between HMI and LST data for three towns (Bedford – BD, Luton – LT and Milton Keynes – MK) between HM index and LST obtained at various spatial resolutions, cooling distances and cooling features (V – Vegetation, W&V – water and vegetation) settings. All coefficients were statistically significant at p value of 0.

Town	Cooling distance	Cooling features	Rsqr		adj Rsqr		Std Error		Intercept a		Coefficient b		Std Error a		Std Error b	
			2m	30m	2m	30m	2m	30m	2m	30m	2m	30m	2m	30m	2m	30m
BD	100m	V	0.24	0.48	0.24	0.48	1.75	2.29	31.45	32.28	-2.87	-7.29	0.00	0.02	0.00	0.03
		W&V	0.28	0.63	0.28	0.63	1.71	1.94	31.56	32.97	-3.08	-8.05	0.00	0.02	0.00	0.03
	200m	V	0.16	0.44	0.16	0.44	1.84	2.37	33.81	38.61	-5.48	-14.86	0.00	0.05	0.00	0.07
		W&V	0.18	0.59	0.18	0.59	1.81	2.03	34.21	40.59	-5.99	-17.11	0.00	0.04	0.00	0.06
	300m	V	0.12	0.46	0.12	0.46	1.88	2.34	33.88	41.54	-5.47	-19.11	0.00	0.06	0.01	0.09
		W&V	0.14	0.58	0.14	0.58	1.86	2.05	34.39	43.86	-6.13	-21.71	0.00	0.06	0.01	0.08
LT	100m	V	0.24	0.64	0.24	0.64	1.59	1.84	31.70	32.19	-2.81	-7.86	0.00	0.01	0.00	0.02
		W&V	0.25	0.64	0.25	0.64	1.58	1.83	31.70	32.20	-2.83	-7.85	0.00	0.01	0.00	0.02
	200m	V	0.19	0.63	0.19	0.63	1.64	1.87	33.42	37.87	-4.60	-14.66	0.00	0.03	0.00	0.04
		W&V	0.19	0.63	0.19	0.63	1.64	1.87	33.44	37.87	-4.63	-14.63	0.00	0.03	0.00	0.04
	300m	V	0.14	0.63	0.14	0.63	1.70	1.85	33.47	40.67	-4.54	-19.06	0.00	0.03	0.00	0.05
		W&V	0.14	0.63	0.14	0.63	1.70	1.85	33.50	40.69	-4.58	-19.06	0.00	0.03	0.00	0.05
MK	100m	V	0.31	0.30	0.31	0.30	1.57	2.33	29.05	29.25	-3.04	-5.65	0.00	0.01	0.00	0.02
		W&V	0.33	0.48	0.33	0.48	1.54	2.01	29.12	30.02	-3.09	-6.80	0.00	0.01	0.00	0.02
	200m	V	0.22	0.22	0.22	0.22	1.67	2.44	31.60	34.09	-6.06	-11.53	0.00	0.04	0.00	0.06
		W&V	0.24	0.44	0.24	0.44	1.64	2.07	31.93	37.18	-6.42	-15.69	0.00	0.03	0.00	0.05
	300m	V	0.18	0.26	0.18	0.26	1.71	2.39	31.79	37.56	-6.28	-16.83	0.00	0.05	0.00	0.08
		W&V	0.20	0.45	0.20	0.45	1.69	2.06	32.21	40.68	-6.76	-20.85	0.00	0.04	0.00	0.06

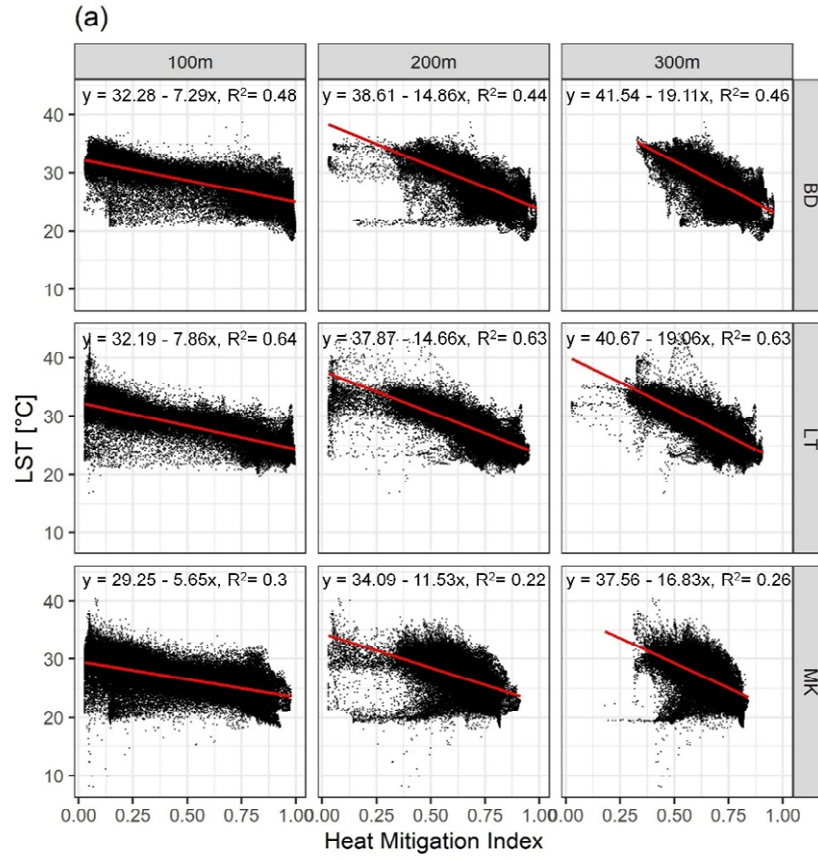
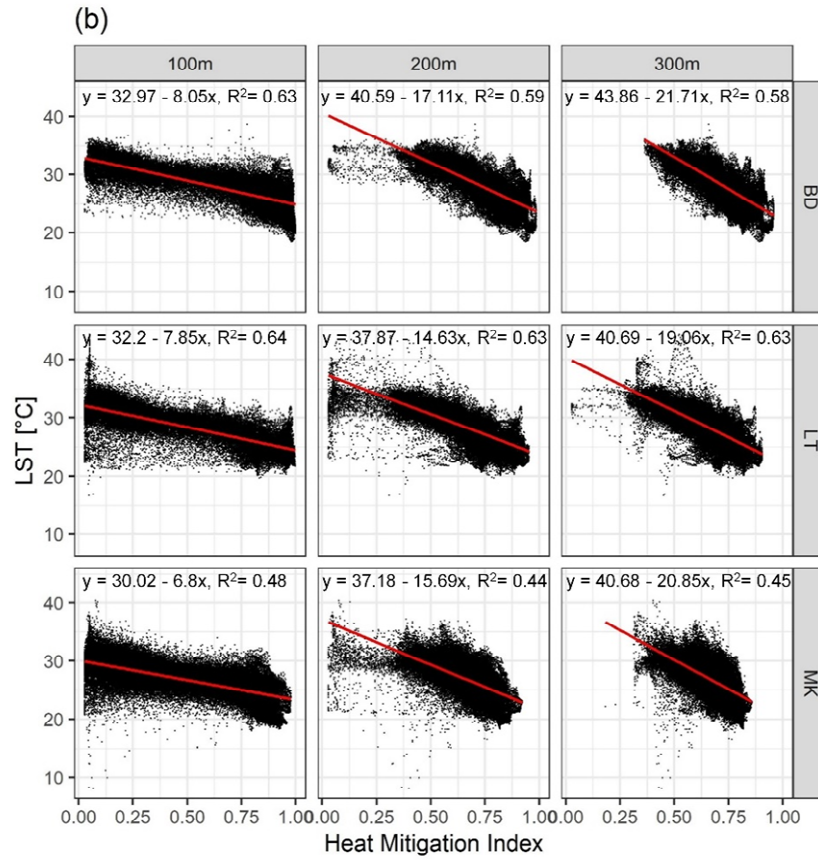


Figure 3 Results of OLS regression between the HMI and LST at 30m resolution for models (a) excluding and (b) including cooling capacity of water.

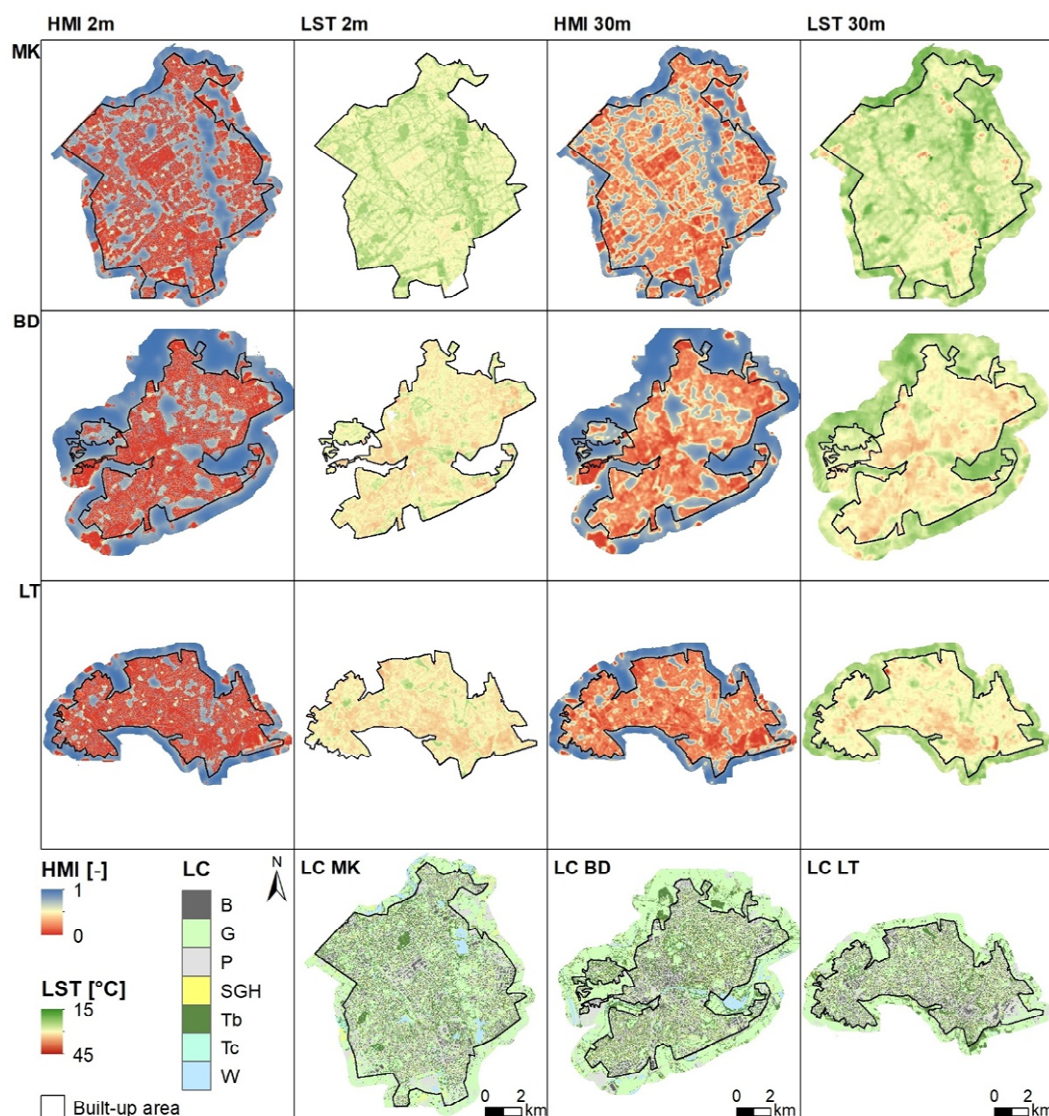


Figure 4 Heat mitigation index (HMI) maps at 2m and 30m resolution for Milton Keynes (MK), Bedford (BD) and Luton (LT) at 100m cooling distance and both vegetation and water set as cooling features. Land surface temperature (LST) at 2m and 30m resolution as well as 2m resolution land cover maps (LC) are shown for comparison and interpretation purposes. Whilst the regression between the HMI and LST maps was carried out for the extent of the built-up boundary only, the Urban Cooling model was run over the entire available extent of the LC

data, accounting for any thermal effects exerted by the rural background on the built-up area of the towns.

Assessment within individual LC types

Analysis of R^2 values obtained from the comparison between spatially distributed HMI and LST values, summarised by LC type (Figure 5 and Tables 3-5 Supplementary Materials) revealed more complex trends of associations than in the city-wide assessments. First of all, the strength of associations varied simultaneously with LC type and spatial resolution as comparisons at 2m resolution yielded higher R^2 values for buildings, paved and grass than for trees and water whilst the opposite was true for the 30m resolution, where HMI for trees appeared to have a stronger association with LST than that for buildings, paved and grass. Moreover, R^2 differed also with the cooling distance of large greenspaces with the highest R^2 for buildings and paved classes observed for distance of 200m at 2m spatial resolution as well as at 30m resolution for buildings in Luton, with the HMI for the remaining LC classes having the strongest relationship to LST at 100m cooling distance. Inclusion of cooling capacity of water into the assessment increased the strength of the relationship between HMI and LST in all LC classes at 30m resolution in Bedford and Milton Keynes and had no effect in Luton. At 2m resolution, small improvements in R^2 were observed in all LC classes apart from water in

Bedford and Milton Keynes.

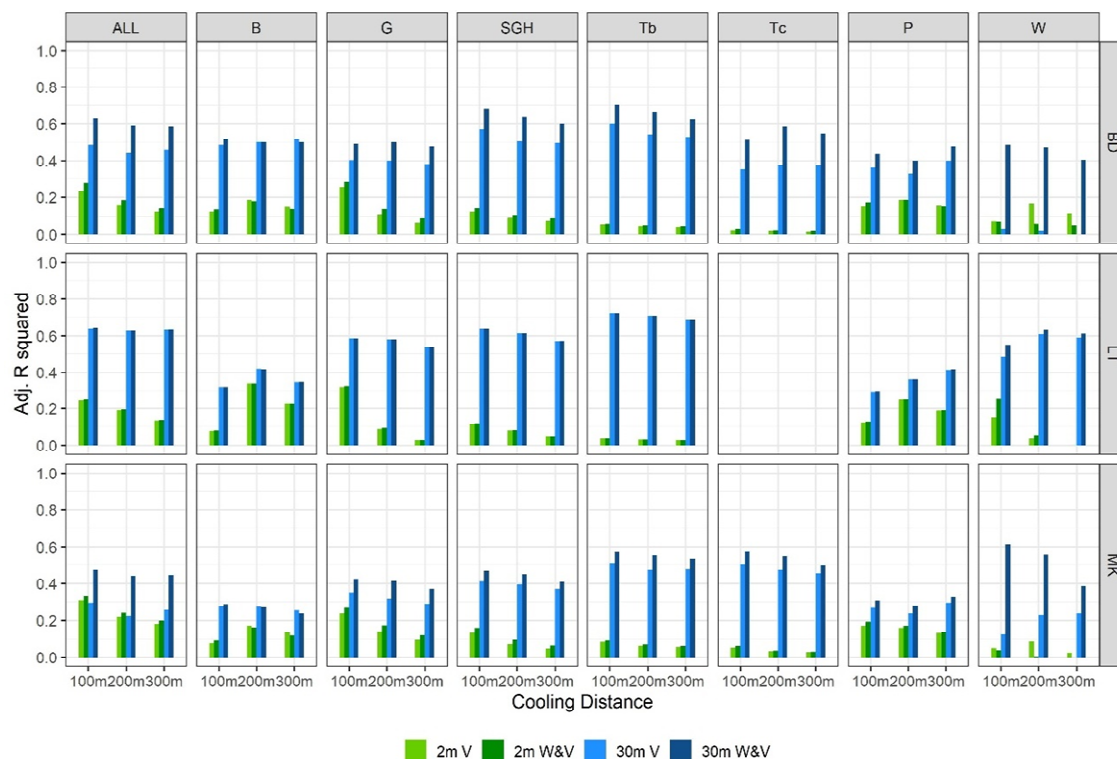


Figure 5 Adjusted R squared values obtained from ordinary least squares regression between HMI and LST values at 2m (green) and 30m (blue) resolutions with cooling features set as vegetation (V) or vegetation and water (W&V) and three different cooling distances of large greenspaces for ALL as well as individual land cover classes. B – buildings, G – grass, P – paved, SGH – short trees/tall grass/hedge, Tb – broadleaf trees, Tc – coniferous trees, W – water.

Changes of LST due to changes in the HMI

Validation of the HMI revealed that it most accurately represented LST after resampling to 30m resolution with model parameterisation including water as a cooling feature and when the 100m cooling distance away from large vegetated patches was considered. Consequently, linear regression equations obtained from the comparison for these parameters were used to calculate the amount of change in LST due to gradual change in the HMI for all three towns

and LC types (Table 4). On average, across all towns, the change in LST due to 0.1 change in the HMI was 0.76 °C, with the largest change of 0.96°C attributed to water, followed by trees (app.0.9 °C), and lowest amount of change occurring within paved (0.65°C). Differences in observed changes in LST could be attributed to the range of LST values observed within the LC types in each town, with lower ranges of LST yielding a smaller degree of change (Figure 4 Supplementary Materials).

Table 4 The amount of change in LST due to 0.1 change in the HMI for ALL and separate LC types in each town derived with inclusion of cooling capacity of water and cooling distance away from large greenspaces of 100m, resampled to 30m resolution. B – buildings, G – grass, P – paved, SGH – short trees/tall grass/hedge, Tb – broadleaf trees, Tc – coniferous trees, W – water.

Town	LC	Change in LST [°C]	Average change [°C]	Std [°C]
BD	ALL	0.81		
LT	ALL	0.78		
MK	ALL	0.68	0.76	0.07
BD	B	0.76		
LT	B	1.05		
MK	B	0.82	0.88	0.15
BD	G	0.81		
LT	G	0.75		
MK	G	0.61	0.72	0.10
BD	P	0.64		
LT	P	0.72		

MK	P	0.58	0.65	0.07
BD	SGH	0.82		
LT	SGH	0.79		
MK	SGH	0.66	0.76	0.08
BD	Tb	0.99		
LT	Tb	0.93		
MK	Tb	0.82	0.91	0.08
BD	Tc	0.99		
LT	Tc	-		
MK	Tc	0.81	0.90	0.12
BD	W	0.88		
LT	W	0.84		
MK	W	1.17	0.96	0.18

Discussion

The InVEST 3.8.7 Urban Cooling model is aimed at describing the cooling capacity of urban greenspaces on air temperature at their location as well as at a distance away and opens possibilities for testing thermal effects of diverse urban form patterns, such as for example in (Ronchi, Salata, & Arcidiacono, 2020), on excess heat mitigation without carrying out on-site measurements or complex analyses of remotely sensed thermal data, and, at the same time, enabling analysis of synergies and trade-offs between other ecosystem services supplied by these greenspaces. The model incorporates information on key properties of land surface that have been shown to determine air and surface temperatures, and these include evaporative cooling of vegetation, shading by tall trees, and albedo. Whilst consideration of these factors by the model yielded HMI that represented some trends in LST, as demonstrated by the inverse relationship in linear regression, there was 40 to 50% of variation in LST across the three towns, as determined by regression coefficients, that remained unexplained. It has to be noted here

that we only used an LST image representing a warm summer day conditions captured at approximately 11 a.m. and the strength of the relationship could be different for LST captured later during the day or a heatwave, when the surface temperature is expected to be higher. There are several further factors that could have influenced the strength of the observed relationship between LST and the HMI and these are discussed below.

Firstly, our approach focussed on the determination of the effects of the cooling distance and spatial resolution of the model outputs without calibration of the weights that are given to albedo, evapotranspiration and shading in the calculation of cooling capacity of urban greenspaces. Whilst InVEST Urban Cooling model calibration carried out by Bosch et al. (2020) over 100 permutations yielded weights that very closely approximated the model default values of 0.2, 0.2 and 0.6 respectively, these weights should be modified to account for specific climatic or weather conditions affecting a given study area. Evaporative cooling of vegetation in regions experiencing large precipitation, such as for example South East Asia, is of lesser importance and UHI mitigation strategies should focus on maximising shading and ventilation (Manoli et al., 2019). Conversely, the weight for evaporative cooling should be reduced under the expectation of water stress, induced by prolonged hot weather, causing plants to close their stomata, bringing transpiration to a halt (Wloczyk, Borg, Richter, & Miegel, 2011).

Inclusion of water as a cooling feature provided a small improvement in the strength of the relationship between HMI and LST data, especially in Milton Keynes characterised with a higher abundance of water bodies. The role of blue infrastructure in the reduction of the UHI effect is well recognised (Hathway & Sharples, 2012; Peng et al., 2020; Yu et al., 2020) and consequently inclusion of evaporation from water could be considered by the model user, especially when the objective of a study is to estimate air temperatures across a city under non-heat stress weather conditions rather than to quantify the ecosystem service of temperature regulation from vegetation only.

Cooling distance of large greenspaces was another factor that impacted HMI magnitudes and its strength of the relationships with the LST data. Whilst some of the observed differences in HMI driven from different cooling extents of large vegetated patches were expected, it is important to note that the model uses the cooling distance set by the user as the radius of the circular moving window within which the total area of greenspaces is calculated and assigned to each grid cell of the LC map submitted to the model. Consequently, the amount of greenspace considered as large (>2ha in size) will increase with the increasing cooling distance, resulting in an unrealistic representation of the HMI, which in the case of this study manifested in decreasing R^2 values for 200m and 300m cooling distances. Moreover, the minimum radius of a circle yielding an area of 2ha is approximately 80m, meaning that no greenspaces can be classified as large should the model be run for cooling distances below that value, reducing the interpretation of the heat mitigation index to the cooling capacity as presented in Equation 1 by limiting the heat mitigation capacity of greenspaces to their footprints only. Given that some authors identified the cooling distance of urban parks or water bodies to be less than 80m (Broadbent, Coutts, Tapper, Demuzere, & Beringer, 2018; Motazedian, Coutts, & Tapper, 2020), this could potentially weaken the accuracy of the model's air temperature estimates calculated based on the heat mitigation index. This instability of the model could be resolved in future releases by separating the cooling distance setting from the size of the search window within which to calculate the amount of greenspace, allowing for parameterisation of the model to better represent specific morphologies of different towns.

Whilst at 30m resolution surface temperature of greenspaces was generally well represented by the HMI, some improvement could be made for buildings and paved areas. This is especially important in the context of the Urban Cooling model's capacity to assess the economic value of vegetative cooling by considering energy savings due to decreased use of air conditioning requiring accurate heat mitigation estimates for buildings. The Urban Cooling model attempts

at representation temperature of grey infrastructure through the interplay of albedo and cooling capacity of large greenspaces at a distance away. Albedo, which corresponds to the amount of solar radiation reflected and therefore not absorbed by the land surface, manifests in the visible light spectrum as the brightness of colour, which can be captured through analysis of multispectral aerial or satellite remotely sensed data, allowing for diversification of its values within paved areas and buildings (Ejiagha et al., 2020; Hofierka, Gallay, Onáčillová, & Hofierka, 2020). Moreover, LST of urban land cover is affected not only by albedo, but also the spatial properties of individual land cover patches, as demonstrated by W. Zhou, Huang, & Cadenasso (2011), which is further confirmed by variable HMI magnitudes obtained in this study for towns with different morphologies. Adaptation of the input LC map for differences in albedo as well as spatial properties of land cover classes could offer a possibility for improvement in representation of their temperature by the HMI, however, these would involve a more sophisticated approach to data preparation requiring extensive expertise in spatial data analysis that may not be available for all model users (Norton et al., 2015). Additionally, Trlica, Hutrya, Schaaf, Erb, & Wang, (2017) have shown that clear relationships between albedo and LST can be obtained after averaging of 30m resolution data up to 500m, which corresponds well with the radius of the Gaussian filter kernel suggested by InVEST Urban Cooling model developers to derive air temperature from the HMI, and implying that greater diversification of albedo values submitted to the model might be spurious.

Another factor reducing the strength of the relationship between the HMI and LST could involve the fact that the Urban Cooling model does not make an account of shading provided by buildings – an effect that can provide significant cooling especially within urban canyons appropriately oriented to the direction of incoming solar radiation (Chen et al., 2020). Furthermore, the date stamps of LST imagery and land cover maps used in this study are somewhat offset in time, with the LST maps having been captured approximately one and a

half years later than the topographic maps from which the distribution of buildings and paved areas were derived. Whilst the time difference is not large, it could have resulted in some discrepancies between land cover and LST at the outskirts of the towns where new development is likely to take place.

The magnitudes of the HMI and the outcomes of the comparison to LST data were impacted by the spatial resolution of the datasets used in the assessment. Whilst associations between these HMI and LST at 2m resolution, corresponding to the spatial resolution of the input LC map, were modest to low, they gained in strength after resampling of the HMI to match the mixed 30m resolution of Landsat-8 derived LST map – an effect that was observed in both the city-wide and individual LC class assessments. This varied behaviour could be an indicator of an under-representation of the natural variation of LST by the HMI within each LC class in 2m resolution outputs, which was mitigated through the resampling procedure to 30m that captured responses from different LC classes into each coarser resolution grid cell through introduction of mixed pixels (Yow, 2007).

Furthermore, as demonstrated by higher comparability of coarse resolution HMI and LST datasets, the model outputs are more suitable for broader assessments that are equivalent to neighbourhood or city scales as suggested by Parsaee et al. (2019) and can therefore support decisions aimed at mitigation of the surface urban heat island at the master plan level. This is especially true given that the relationship between LST and air temperature in urban areas is weak at very fine resolutions of the LST data, with LST hotspots not necessarily coinciding with hotspots in air temperature (Coutts et al., 2016). This relationship, however, strengthened upon coarsening the spatial resolution of the LST images and supported the conclusion of this study of limited suitability of the HMI for micro-scale city planning.

Conclusions

In this study, the heat mitigation index generated by the InVEST 3.8.7 Urban Cooling model was validated by comparison to land surface temperature images captured on a warm summer day at two spatial resolutions: 2 and 30m in three sub-urban towns. The results suggested that the index is capable of depicting a portion of the thermal response of land surface, especially for towns with a denser built-up structure and at a coarser spatial resolution, making the model suitable for studies at the masterplan level. Future work should consider testing the model under different heat scenarios that may affect the evaporative capacity of the vegetation as well as the possibility of diversification of not only the weights for shading, evapotranspiration and albedo but also the input LC maps according to internal variability of these factors within each LC type. This study has also demonstrated that the inclusion of evaporation from water bodies in the cooling capacity calculations can improve the accuracy of the heat mitigation index computed by the model, especially in cities with higher abundance of water bodies, indicating that cooling capacity of water can be successfully represented by the model.

We found one important limitation of the model affecting the definition of large greenspaces and their cooling capacity estimates beyond their footprints, related to the entanglement of the cooling distance setting with the radius of the search window used to identify large greenspaces. Whilst the 100m cooling distance in this study returned heat mitigation index with the highest resemblance to land surface temperature data as well as a realistic representation of large greenspaces, the use of cooling distances lower than 80m or higher than 100m would result in under- and over-representation of large greenspaces and their cooling capacity, potentially leading to an erroneous estimation of the value of local temperature regulation ecosystem service by urban greenspaces or misidentification of urban form patterns conducive to cooler air temperatures in the cities. Consequently, authors should take extra care when selecting the cooling distances of large greenspaces to assure that the model represents their

abundance well within their study areas, ensuring high accuracy of the heat mitigation estimates returned by the model.

Acknowledgements

Removed for anonymity

References

Aleksandrowicz, O., Vuckovic, M., Kiesel, K., & Mahdavi, A. (2017). Current trends in urban heat island mitigation research: Observations based on a comprehensive research repository. *Urban Climate*, 21, 1–26. <https://doi.org/10.1016/j.uclim.2017.04.002>

Allen, R. G., Pereira, L. S., Raes, D., & Smith, M. (1998). *Crop evapotranspiration-Guidelines for computing crop water requirements-FAO Irrigation and drainage paper 56*. Retrieved from <https://www.researchgate.net/publication/235704197>

Aram, F., Higuera García, E., Solgi, E., & Mansournia, S. (2019). Urban green space cooling effect in cities. *Heliyon*, 5(4), e01339. <https://doi.org/10.1016/j.heliyon.2019.e01339>

Bherwani, H., Singh, A., & Kumar, R. (2020). Assessment methods of urban microclimate and its parameters: A critical review to take the research from lab to land. *Urban Climate*, 34, 100690. <https://doi.org/10.1016/j.uclim.2020.100690>

Bosch, M., Locatelli, M., Hamel, P., Remme, R., Chenal, J., Joost S. A spatially-explicit approach to simulate urban heat islands in complex urban landscapes *Geoscientific Model Development Discussions*, pp. 1-22, 10.5194/gmd-2020-174

Bowler, D. E., Buyung-Ali, L., Knight, T. M., & Pullin, A. S. (2010). Urban greening to cool towns and cities: A systematic review of the empirical evidence. *Landscape and Urban Planning*, 97(3), 147–155. <https://doi.org/10.1016/j.landurbplan.2010.05.006>

- 569 Broadbent, A. M., Coutts, A. M., Tapper, N. J., Demuzere, M., & Beringer, J. (2018). The
 570 microscale cooling effects of water sensitive urban design and irrigation in a suburban
 571 environment. *Theoretical and Applied Climatology*, 134(1–2), 1–23.
 572 <https://doi.org/10.1007/s00704-017-2241-3>
- 573 Casanueva, A., Kotlarski, S., Fischer, A. M., Flouris, A. D., Kjellstrom, T., Lemke, B., ...
 574 Liniger, M. A. (2020). Escalating environmental summer heat exposure—a future threat for
 575 the European workforce. *Regional Environmental Change*, 20(2), 1–14.
 576 <https://doi.org/10.1007/s10113-020-01625-6>
- 577 Chen, G., Wang, D., Wang, Q., Li, Y., Wang, X., Hang, J., ... Wang, K. (2020). Scaled outdoor
 578 experimental studies of urban thermal environment in street canyon models with various aspect
 579 ratios and thermal storage. *Science of the Total Environment*, 726, 138147.
 580 <https://doi.org/10.1016/j.scitotenv.2020.138147>
- 581 Cortinovis, C., & Geneletti, D. (2019). A framework to explore the effects of urban planning
 582 decisions on regulating ecosystem services in cities. *Ecosystem Services*, 38, 100946.
 583 <https://doi.org/10.1016/j.ecoser.2019.100946>
- 584 Coutts, A. M., Harris, R. J., Phan, T., Livesley, S. J., Williams, N. S. G., & Tapper, N. J. (2016).
 585 Thermal infrared remote sensing of urban heat: Hotspots, vegetation, and an assessment of
 586 techniques for use in urban planning. *Remote Sensing of Environment*, 186, 637–651.
 587 <https://doi.org/10.1016/j.rse.2016.09.007>
- 588 Droogers, P., & Allen, R. G. (2002). Estimating reference evapotranspiration under inaccurate
 589 data conditions. *Irrigation and Drainage Systems*, 16(1), 33–45.
 590 <https://doi.org/10.1023/A:1015508322413>
- 591 Ejiagha, I. R., Ahmed, M. R., Hassan, Q. K., Dewan, A., Gupta, A., & Rangelova, E. (2020).
 592 Use of Remote Sensing in Comprehending the Influence of Urban Landscape's Composition

- 593 and Configuration on Land Surface Temperature at Neighbourhood Scale. *Remote Sensing*,
 594 12(15), 2508. <https://doi.org/10.3390/rs12152508>
- 595 Errell, E. (2008). The Application of Urban Climate Research in the Design of Cities. *Advances*
 596 *in Building Energy Research*, 2(1), 95–121. <https://doi.org/10.3763/aber.2008.0204>
- 597 European Commission. (2013). *Building a green infrastructure for Europe - Publications*
 598 *Office of the EU*. <https://doi.org/doi.org/10.2779/54125>
- 599 Grafius, D. R., Corstanje, R., Siriwardena, G. M., Plummer, K. E., & Harris, J. A. (2017). A
 600 bird's eye view: using circuit theory to study urban landscape connectivity for birds. *Landscape*
 601 *Ecology*, 32(9), 1771–1787. <https://doi.org/10.1007/s10980-017-0548-1>
- 602 Grafius, D. R., Corstanje, R., Warren, P. H., Evans, K. L., Hancock, S., & Harris, J. A. (2016).
 603 The impact of land use/land cover scale on modelling urban ecosystem services. *Landscape*
 604 *Ecology*, 31(7), 1509–1522. <https://doi.org/10.1007/s10980-015-0337-7>
- 605 Grafius, D. R., Corstanje, R., Warren, P. H., Evans, K. L., Norton, B. A., Siriwardena, G. M.,
 606 ... Harris, J. A. (2019). Using GIS-linked Bayesian Belief Networks as a tool for modelling
 607 urban biodiversity. *Landscape and Urban Planning*, 189, 382–395.
 608 <https://doi.org/10.1016/j.landurbplan.2019.05.012>
- 609 Gunawardena, K. R., Wells, M. J., & Kershaw, T. (2017). Utilising green and bluespace to
 610 mitigate urban heat island intensity. *Science of the Total Environment*, 584–585, 1040–1055.
 611 <https://doi.org/10.1016/j.scitotenv.2017.01.158>
- 612 Hathway, E.A., Sharples S. (2012) The interaction of rivers and urban form in mitigating the
 613 Urban Heat Island effect: A UK case study. *Building and Environment*, 58, pp. 14-22,
 614 10.1016/j.buildenv.2012.06.013

- 615 Heaviside, C., Macintyre, H., & Vardoulakis, S. (2017). The Urban Heat Island: Implications
 616 for Health in a Changing Environment. *Current Environmental Health Reports*, 4(3), 296–305.
 617 <https://doi.org/10.1007/s40572-017-0150-3>
- 618 Heaviside, C., Vardoulakis, S., & Cai, X.-M. (2016). Attribution of mortality to the urban heat
 619 island during heatwaves in the West Midlands, UK. *Environmental Health*, 15(S1), S27.
 620 <https://doi.org/10.1186/s12940-016-0100-9>
- 621 Hofierka, J., Gallay, M., Onáčillová, K., & Hofierka, J. (2020). Physically-based land surface
 622 temperature modeling in urban areas using a 3-D city model and multispectral satellite data.
 623 *Urban Climate*, 31, 100566. <https://doi.org/10.1016/j.uclim.2019.100566>
- 624 Jimenez-Munoz, J. C., Sobrino, J. A., Skokovic, D., Mattar, C., & Cristobal, J. (2014). Land
 625 surface temperature retrieval methods from landsat-8 thermal infrared sensor data. *IEEE*
 626 *Geoscience and Remote Sensing Letters*, 11(10), 1840–1843.
 627 <https://doi.org/10.1109/LGRS.2014.2312032>
- 628 Kjellstrom, T., Freyberg, C., Lemke, B., Otto, M., & Briggs, D. (2018). Estimating population
 629 heat exposure and impacts on working people in conjunction with climate change.
 630 *International Journal of Biometeorology*, 62(3), 291–306. [https://doi.org/10.1007/s00484-017-](https://doi.org/10.1007/s00484-017-1407-0)
 631 [1407-0](https://doi.org/10.1007/s00484-017-1407-0)
- 632 Kleerekoper, L., van Esch, M., & Salcedo, T. B. (2012). How to make a city climate-proof,
 633 addressing the urban heat island effect. *Resources, Conservation and Recycling*, 64, 30–38.
 634 <https://doi.org/10.1016/j.resconrec.2011.06.004>
- 635 Lin, P., Gou, Z., Lau, S., & Qin, H. (2017). The Impact of Urban Design Descriptors on
 636 Outdoor Thermal Environment: A Literature Review. *Energies*, 10(12), 2151.
 637 <https://doi.org/10.3390/en10122151>

- 638 Manoli, G., Fatichi, S., Schlöpfer, M., Yu, K., Crowther, T. W., Meili, N., ... Bou-Zeid, E.
 639 (2019). Magnitude of urban heat islands largely explained by climate and population. *Nature*,
 640 573(7772), 55–60. <https://doi.org/10.1038/s41586-019-1512-9>
- 641 Meng, C. (2017). Mitigating the surface urban heat island: Mechanism study and sensitivity
 642 analysis. *Asia-Pacific Journal of Atmospheric Sciences*, 53(3), 327–338.
 643 <https://doi.org/10.1007/s13143-017-0036-1>
- 644 Met Office, Hollis, D., McCarthy, M., Kendon, M., Legg, T., Simpson, I. (2019). HadUK-Grid
 645 Gridded Climate Observations on a 1km grid over the UK, v1.0.1.0 (1862-2018). Centre for
 646 Environmental Data Analysis, 14 November 2019.
 647 <http://dx.doi.org/10.5285/d134335808894b2bb249e9f222e2eca8>.
- 648 Millennium Ecosystem Assessment. (2005). *Ecosystems and Human Well-being: Synthesis*.
 649 Island Press, Washington, DC.
- 650 Motazedian, A., Coutts, A. M., & Tapper, N. J. (2020). The microclimatic interaction of a small
 651 urban park in central Melbourne with its surrounding urban environment during heat events.
 652 *Urban Forestry and Urban Greening*, 52, 126688. <https://doi.org/10.1016/j.ufug.2020.126688>
- 653 Norton, B. A., Coutts, A. M., Livesley, S. J., Harris, R. J., Hunter, A. M., & Williams, N. S. G.
 654 (2015). Planning for cooler cities: A framework to prioritise green infrastructure to mitigate
 655 high temperatures in urban landscapes. *Landscape and Urban Planning*, 134, 127–138.
 656 <https://doi.org/10.1016/j.landurbplan.2014.10.018>
- 657 Oke, T. R. (1976). The distinction between canopy and boundary-layer urban heat islands.
 658 *Atmosphere*, 14(4), 268–277. <https://doi.org/10.1080/00046973.1976.9648422>
- 659 Oke, T. R. (1988). The urban energy balance. *Progress in Physical Geography*, 12(4), 471–
 660 508. <https://doi.org/10.1177/030913338801200401>

- 661 Oke, T. R., Johnson, G. T., Steyn, D. G., & Watson, I. D. (1991). Simulation of surface urban
 662 heat islands under “ideal” conditions at night part 2: Diagnosis of causation. *Boundary-Layer*
 663 *Meteorology*, 56(4), 339–358. <https://doi.org/10.1007/BF00119211>
- 664 Parsaee, M., Joybari, M. M., Mirzaei, P. A., & Haghighat, F. (2019, May 1). Urban heat island,
 665 urban climate maps and urban development policies and action plans. *Environmental*
 666 *Technology and Innovation*, Vol. 14, p. 100341. <https://doi.org/10.1016/j.eti.2019.100341>
- 667 Perkins, S. E., Alexander, L. V., & Nairn, J. R. (2012). Increasing frequency, intensity and
 668 duration of observed global heatwaves and warm spells. *Geophysical Research Letters*, 39(20),
 669 2012GL053361. <https://doi.org/10.1029/2012GL053361>
- 670 Peng, J. , Liu, Q. , Xu, Z., Lyu, D., Du, Y., Qiao, R., Wu. J. (2020) How to effectively
 671 mitigate urban heat island effect? A perspective of waterbody patch size threshold. *Landscape*
 672 *and Urban Planning*, p. 103873, 10.1016/j.landurbplan.2020.103873
- 673 Phelan, P. E., Kaloush, K., Miner, M., Golden, J., Phelan, B., Silva, H., & Taylor, R. A. (2015).
 674 Urban Heat Island: Mechanisms, Implications, and Possible Remedies. *Annual Review of*
 675 *Environment and Resources*, 40(1), 285–307. [https://doi.org/10.1146/annurev-environ-](https://doi.org/10.1146/annurev-environ-102014-021155)
 676 102014-021155
- 677 Ronchi, S., Salata, S., & Arcidiacono, A. (2020). Which urban design parameters provide
 678 climate-proof cities? An application of the Urban Cooling InVEST Model in the city of Milan
 679 comparing historical planning morphologies. *Sustainable Cities and Society*, 63, 102459.
 680 <https://doi.org/10.1016/j.scs.2020.102459>
- 681 Roth, M., Oke, T. R., & Emery, W. J. (1989). Satellite-derived urban heat islands from three
 682 coastal cities and the utilization of such data in urban climatology. *International Journal of*
 683 *Remote Sensing*, 10(11), 1699–1720. <https://doi.org/10.1080/01431168908904002>

- 684 Santamouris, M., Cartalis, C., Synnefa, A., & Kolokotsa, D. (2015). On the impact of urban
 685 heat island and global warming on the power demand and electricity consumption of
 686 buildings—A review. *Energy and Buildings*, 98, 119–124.
 687 <https://doi.org/10.1016/j.enbuild.2014.09.052>
- 688 Sharp, R., Douglass, J., Wolny, S., Arkema, K., Bernhardt, J., Bierbower W., ..., Wyatt K.
 689 (2020) InVEST 3.8.7.post12+ug.gbcad34f User's Guide. The Natural Capital Project, Stanford
 690 University, University of Minnesota, The Nature Conservancy, and World Wildlife Fund
- 691 Sung, C. Y. (2013). Mitigating surface urban heat island by a tree protection policy: A case
 692 study of The Woodland, Texas, USA. *Urban Forestry & Urban Greening*, 12(4), 474–480.
 693 <https://doi.org/10.1016/j.ufug.2013.05.009>
- 694 Taha, H., Akbari, H., Rosenfeld, A., & Huang, J. (1988). Residential cooling loads and the
 695 urban heat island—the effects of albedo. *Building and Environment*, 23(4), 271–283.
 696 [https://doi.org/10.1016/0360-1323\(88\)90033-9](https://doi.org/10.1016/0360-1323(88)90033-9)
- 697 Trlica, A., Hutrya, L. R., Schaaf, C. L., Erb, A., & Wang, J. A. (2017). Albedo, Land Cover,
 698 and Daytime Surface Temperature Variation Across an Urbanized Landscape. *Earth's Future*,
 699 5(11), 1084–1101. <https://doi.org/10.1002/2017EF000569>
- 700 Tsoka, S., Tsikaloudaki, K., Theodosiou, T., & Bikas, D. (2020). Urban warming and cities'
 701 microclimates: Investigation methods and mitigation strategies—A review. *Energies*, 13(6),
 702 1414. <https://doi.org/10.3390/en13061414>
- 703 United Nations, Department of Economic, Social Affairs Population Division (2019) World
 704 Urbanization Prospects: The 2018 Revision (ST/ESA/SER.A/420), United Nations, New York.

- 705 Vaz Monteiro, M., Doick, K. J., Handley, P., & Peace, A. (2016). The impact of greenspace
706 size on the extent of local nocturnal air temperature cooling in London. *Urban Forestry and*
707 *Urban Greening*, 16, 160–169. <https://doi.org/10.1016/j.ufug.2016.02.008>
- 708 Voogt, J. ., & Oke, T. . (2003). Thermal remote sensing of urban climates. *Remote Sensing of*
709 *Environment*, 86(3), 370–384. [https://doi.org/10.1016/S0034-4257\(03\)00079-8](https://doi.org/10.1016/S0034-4257(03)00079-8)
- 710 Wang, W., Yao, X., & Shu, J. (2020). Air advection induced differences between canopy and
711 surface heat islands. *Science of The Total Environment*, 725, 138120.
712 <https://doi.org/10.1016/j.scitotenv.2020.138120>
- 713 Wloczyk, C., Borg, E., Richter, R., Miegel K. (2011) Estimation of instantaneous air
714 temperature above vegetation and soil surfaces from Landsat 7 ETM+ data in northern
715 Germany *International Journal of Remote Sensing*, 32 (24), pp. 9119-9136,
716 10.1080/01431161.2010.550332
- 717
- 718 Wouters, H., De Ridder, K., Poelmans, L., Willems, P., Brouwers, J., Hosseinzadehtalaei, P.,
719 ... Demuzere, M. (2017). Heat stress increase under climate change twice as large in cities as
720 in rural areas: A study for a densely populated midlatitude maritime region. *Geophysical*
721 *Research Letters*, 44(17), 8997–9007. <https://doi.org/10.1002/2017GL074889>
- 722 Yow, D. M. (2007). Urban Heat Islands: Observations, Impacts, and Adaptation. *Geography*
723 *Compass*, 1(6), 1227–1251. <https://doi.org/10.1111/j.1749-8198.2007.00063.x>
- 724 Zardo, L., Geneletti, D., Pérez-Soba, M., & Van Eupen, M. (2017). Estimating the cooling
725 capacity of green infrastructures to support urban planning. *Ecosystem Services*, 26, 225–235.
726 <https://doi.org/10.1016/j.ecoser.2017.06.016>

- 727 Zawadzka, J., Corstanje, R., Harris, J., & Truckell, I. (2020). Downscaling Landsat-8 land
728 surface temperature maps in diverse urban landscapes using multivariate adaptive regression
729 splines and very high resolution auxiliary data. *International Journal of Digital Earth*, 13(8),
730 899–914. <https://doi.org/10.1080/17538947.2019.1593527>
- 731 Zhou, D., Xiao, J., Bonafoni, S., Berger, C., Deilami, K., Zhou, Y., ... Sobrino, J. (2019).
732 Satellite Remote Sensing of Surface Urban Heat Islands: Progress, Challenges, and
733 Perspectives. *Remote Sensing*, 11(1), 48. <https://doi.org/10.3390/rs11010048>
- 734 Zhou, W., Huang, G., & Cadenasso, M. L. (2011). Does spatial configuration matter?
735 Understanding the effects of land cover pattern on land surface temperature in urban
736 landscapes. *Landscape and Urban Planning*, 102(1), 54–63.
737 <https://doi.org/10.1016/j.landurbplan.2011.03.009>

Supplementary Materials to paper: Assessment of heat mitigation capacity of urban greenspaces with the use of InVEST urban cooling model, verified with day-time land surface temperature data by Joanna Zawadzka, Jim Harris and Ron Corstanje published in Landscape and Urban Planning journal.

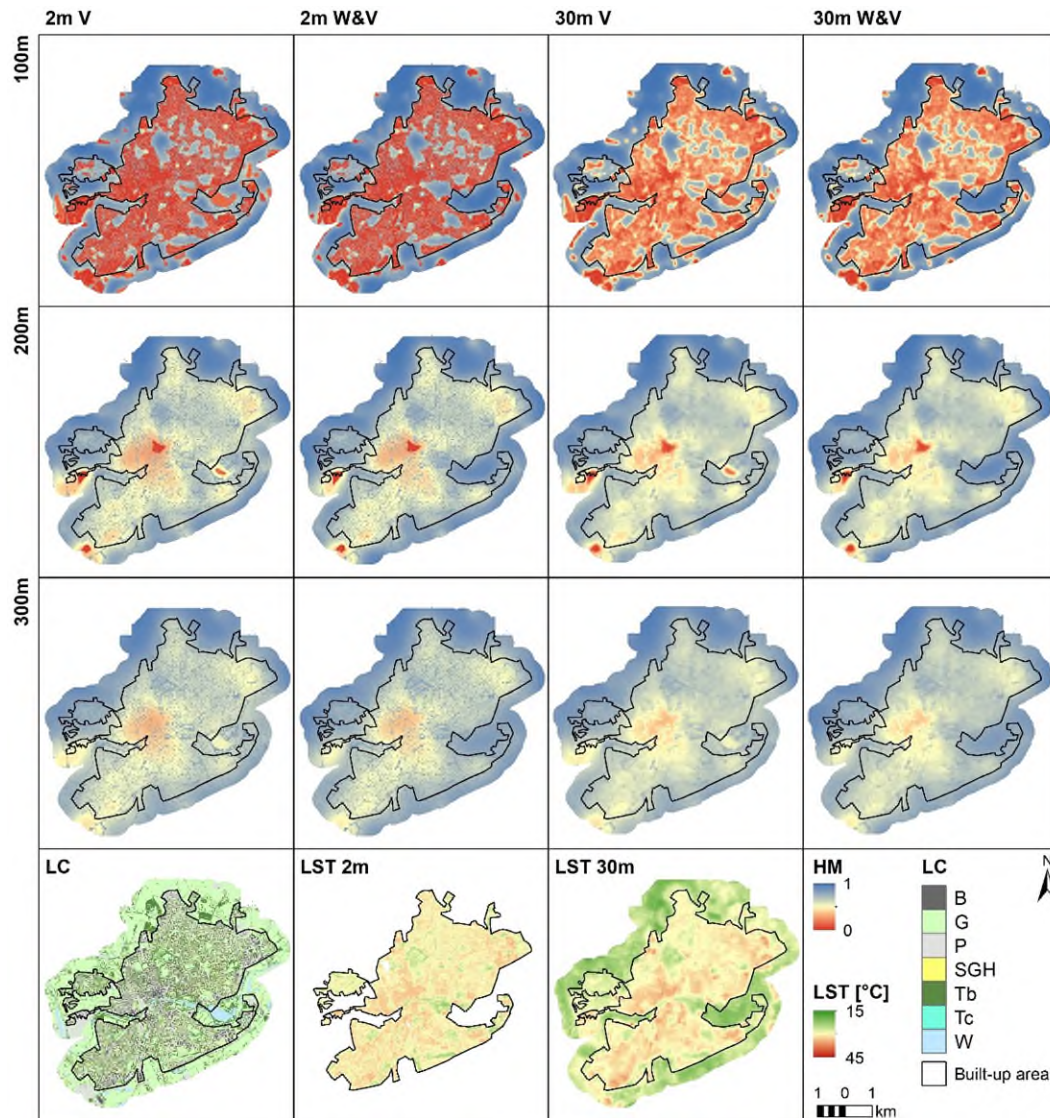


Figure 1 Heat mitigation (HM) index maps at 2m and 30m resolution for Bedford at various vegetation cooling distance and cooling feature settings. For comparison, land cover (LC) map and land surface temperature (LST) maps are shown. V – vegetation, W&V – vegetation and water.

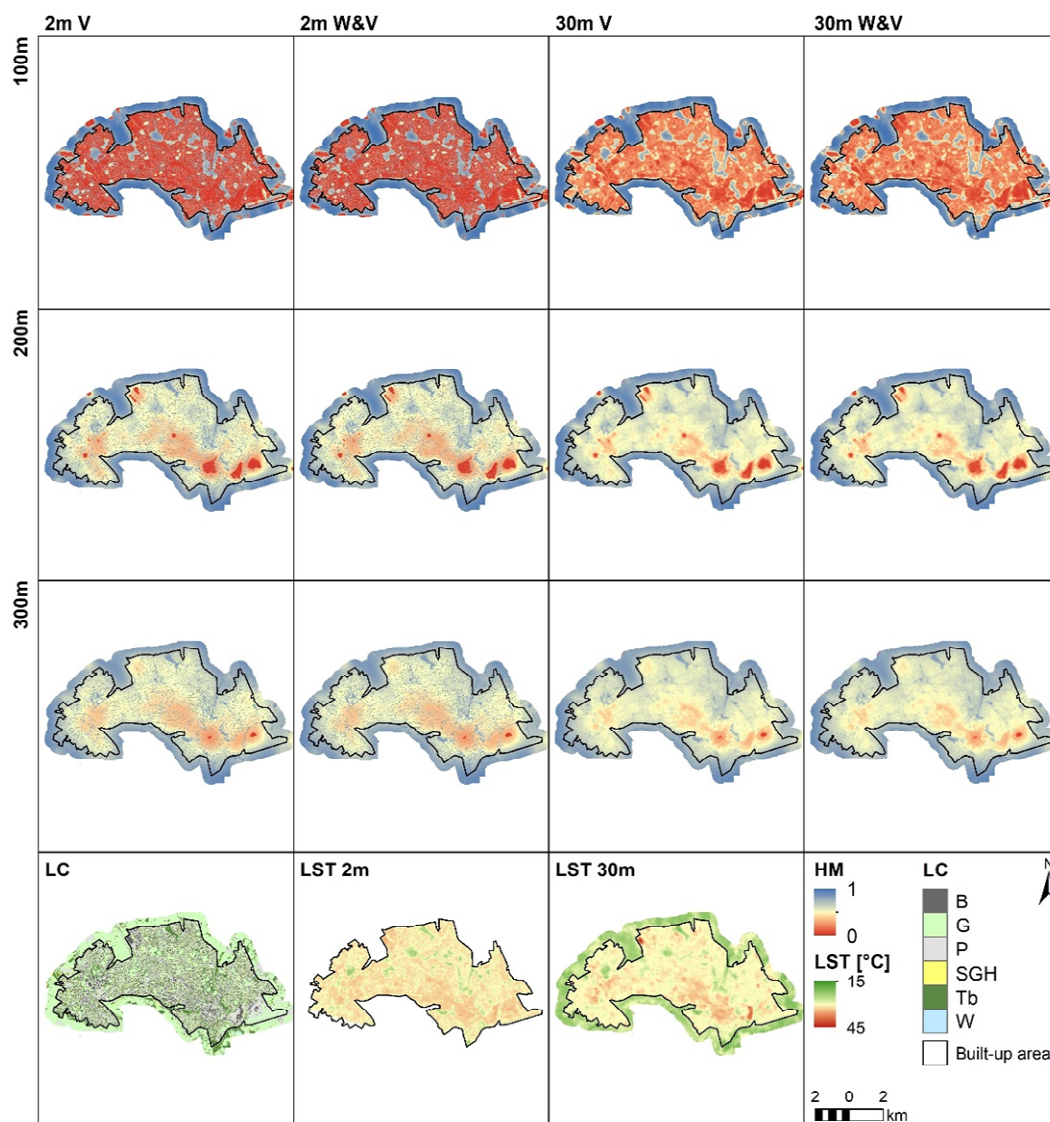


Figure 2 Heat mitigation (HM) index maps at 2m and 30m resolution for Luton at various vegetation cooling distance and cooling feature settings. For comparison, land cover (LC) map and land surface temperature (LST) maps are shown. V – vegetation, W&V – vegetation and water.

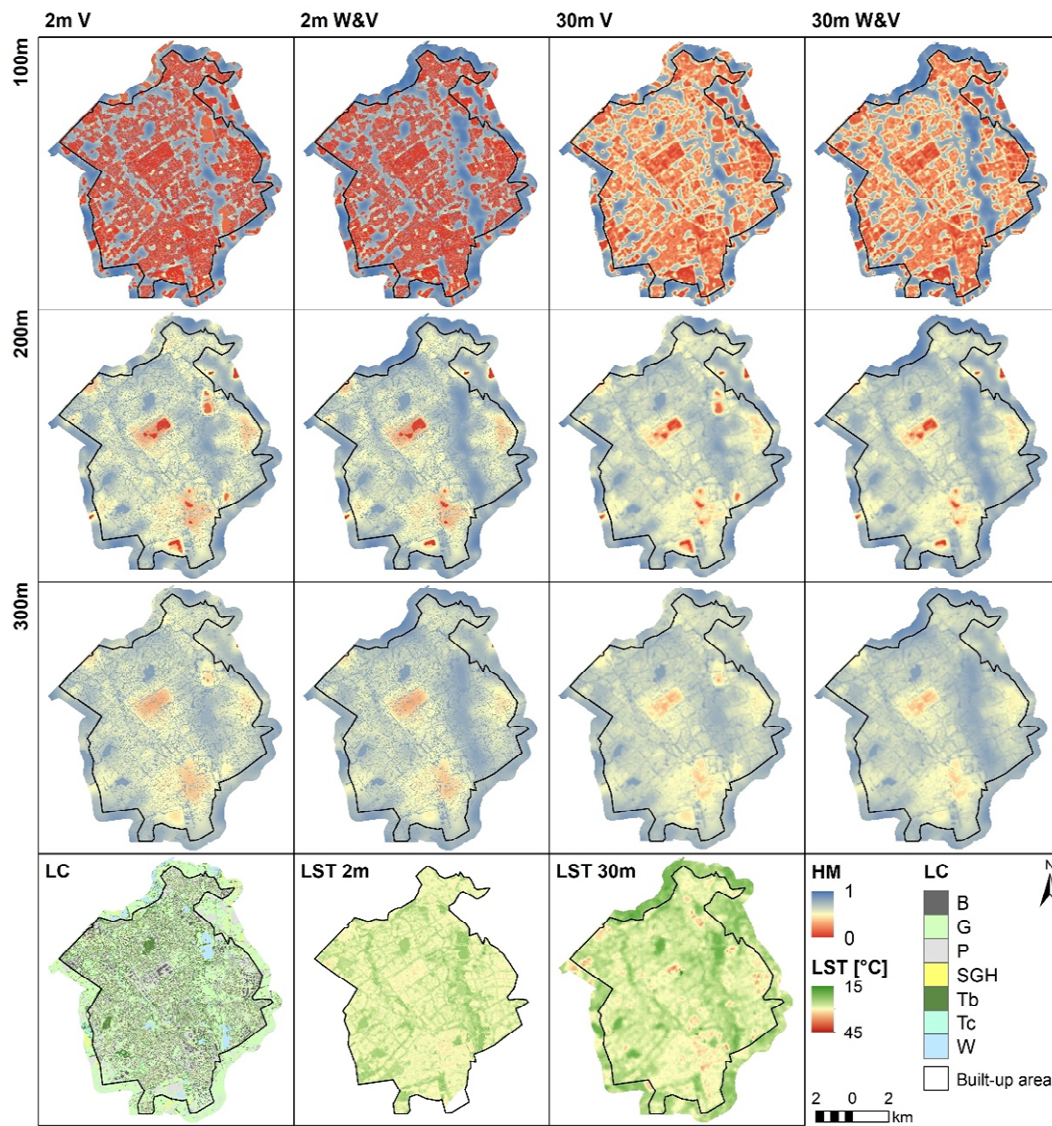


Figure 3 Heat mitigation (HM) index maps at 2m and 30m resolution for Milton Keynes at various vegetation cooling distance and cooling feature settings. For comparison, land cover (LC) map and land surface temperature (LST) maps are shown. V – vegetation, W&V – vegetation and water.

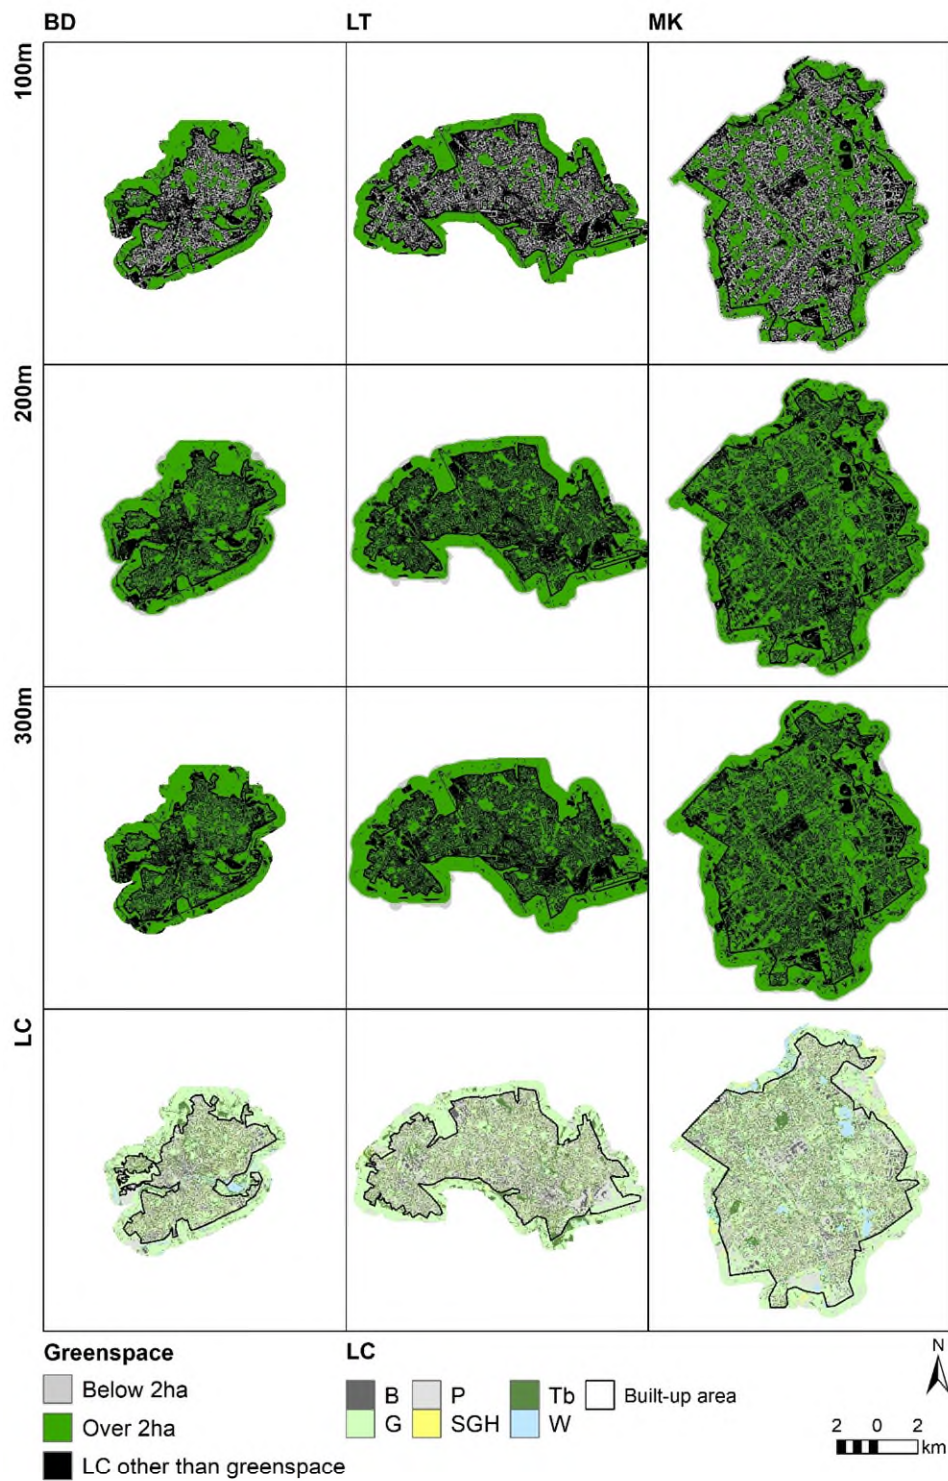


Figure 4 Differing spatial distributions of large greenspaces resulting from varied cooling distance setting (100m, 200m 300m) of the InVEST 3.8.7 Urban Cooling model across three towns (BD – Bedford, LT – Luton, MK – Milton Keynes). Land cover (LC) definitions are given in description of Table 1.

Table 1 Heat mitigation means and standard deviations (in brackets) estimated for Bedford - BD, Luton - LT and Milton Keynes - MK for Urban Cooling model outputs at two spatial resolutions: 2m and resampled to 30m, assessed for two different sets of cooling features (V – vegetation or W&V – water and vegetation) and at three different cooling distances away from large greenspaces (>2ha in size).

Town	Resolution [m]	Cooling features	LST [°C]	Cooling distance		
				100m	200m	300m
BD	2m	W&V	30.43 (2)	0.37 (0.34)	0.63 (0.14)	0.65 (0.12)
		V		0.36 (0.34)	0.62 (0.15)	0.63 (0.13)
	30m	W&V	28.48 (3.18)	0.56 (0.31)	0.71 (0.14)	0.71 (0.11)
		V		0.52 (0.3)	0.68 (0.14)	0.68 (0.11)
LT	2m	W&V	30.9 (1.83)	0.29 (0.32)	0.55 (0.17)	0.57 (0.15)
		V		0.29 (0.32)	0.55 (0.17)	0.57 (0.15)
	30m	W&V	29.23 (2.81)	0.39 (0.28)	0.6 (0.15)	0.61 (0.12)
		V		0.39 (0.28)	0.6 (0.15)	0.61 (0.12)
MK	2m	W&V	27.83 (1.89)	0.42 (0.35)	0.64 (0.14)	0.65 (0.12)
		V		0.4 (0.35)	0.62 (0.15)	0.63 (0.13)
	30m	W&V	26.98 (2.56)	0.46 (0.26)	0.65 (0.11)	0.66 (0.08)
		V		0.43 (0.25)	0.63 (0.11)	0.64 (0.08)

Table 2 Heat mitigation means and standard deviations (in brackets) returned by the InVEST 3.8.7 Urban Cooling models for different types of land cover in all three towns for three different cooling distances of large vegetation patches and at two spatial resolutions – 2m and 30m. Statistics for land surface temperature (LST) are also given. B – buildings, G – grass, P – paved, SGH – short trees/tall grass/hedge, Tb – broadleaf trees, Tc – coniferous trees, W – water. BD – Bedford, LT – Luton, MK – Milton Keynes.

LC	Town	Cooling features	Cooling distance						LST		
			100m		200m		300m				
		Sp. res.	2m	30m	2m	30m	2m	30m	2m	30m	
B	BD	V	0.26 (0.18)	0.13 (0.21)	0.58 (0.12)	0.53 (0.13)	0.6 (0.09)	0.56 (0.1)	31.28 (1.94)	31.82 (1.15)	
		V&W	0.27 (0.18)	0.13 (0.22)	0.59 (0.12)	0.55 (0.13)	0.62 (0.09)	0.58 (0.1)	31.28 (1.94)	31.82 (1.15)	
	LT	V	0.2 (0.12)	0.08 (0.14)	0.5 (0.14)	0.45 (0.15)	0.54 (0.1)	0.49 (0.1)	31.11 (2.21)	31.85 (1.18)	
		V&W	0.2 (0.12)	0.08 (0.14)	0.5 (0.14)	0.46 (0.15)	0.54 (0.1)	0.49 (0.1)	31.11 (2.21)	31.85 (1.18)	
	MK	V	0.23 (0.14)	0.11 (0.18)	0.56 (0.12)	0.52 (0.12)	0.59 (0.08)	0.55 (0.08)	28.92 (2.25)	29.52 (1.07)	
		V&W	0.24 (0.15)	0.11 (0.19)	0.58 (0.12)	0.54 (0.12)	0.6 (0.08)	0.57 (0.09)	28.92 (2.25)	29.52 (1.07)	
	G	BD	V	0.7 (0.25)	0.47 (0.27)	0.75 (0.12)	0.62 (0.11)	0.73 (0.1)	0.62 (0.1)	27.31 (2.92)	29.42 (1.94)
			V&W	0.73 (0.25)	0.48 (0.28)	0.77 (0.12)	0.63 (0.11)	0.76 (0.1)	0.64 (0.1)	27.31 (2.92)	29.42 (1.94)
LT		V	0.6 (0.29)	0.4 (0.25)	0.68 (0.14)	0.55 (0.11)	0.67 (0.11)	0.55 (0.1)	27.7 (2.86)	29.87 (2.01)	
		V&W	0.6 (0.29)	0.41 (0.26)	0.68 (0.14)	0.56 (0.12)	0.67 (0.11)	0.56 (0.1)	27.7 (2.86)	29.87 (2.01)	
MK		V	0.58 (0.24)	0.5 (0.27)	0.67 (0.09)	0.61 (0.1)	0.66 (0.07)	0.61 (0.09)	26.26 (2.28)	27.02 (1.83)	
		V&W	0.6 (0.24)	0.53 (0.28)	0.69 (0.09)	0.64 (0.11)	0.68 (0.07)	0.63 (0.09)	26.26 (2.28)	27.02 (1.83)	
P		BD	V	0.3 (0.22)	0.13 (0.23)	0.6 (0.14)	0.55 (0.12)	0.62 (0.1)	0.57 (0.1)	30.28 (2.26)	31.19 (1.38)
			V&W	0.31 (0.23)	0.14 (0.24)	0.62 (0.14)	0.57 (0.12)	0.64 (0.1)	0.6 (0.1)	30.28 (2.26)	31.19 (1.38)
	LT	V	0.23 (0.16)	0.09 (0.18)	0.53 (0.14)	0.48 (0.14)	0.56 (0.1)	0.51 (0.11)	30.25 (2.13)	31.48 (1.25)	
		V&W	0.23 (0.16)	0.09 (0.18)	0.53 (0.14)	0.48 (0.14)	0.56 (0.1)	0.51 (0.11)	30.25 (2.13)	31.48 (1.25)	
	MK	V	0.30 (0.2)	0.17 (0.27)	0.59 (0.11)	0.55 (0.12)	0.61 (0.08)	0.57 (0.09)	27.81 (2.21)	28.57 (1.5)	
		V&W	0.31 (0.21)	0.18 (0.28)	0.61 (0.12)	0.57 (0.13)	0.63 (0.08)	0.59 (0.1)	27.81 (2.21)	28.57 (1.5)	
	SGH	BD	V	0.44 (0.25)	0.38 (0.28)	0.65 (0.11)	0.61 (0.13)	0.66 (0.09)	0.62 (0.12)	29.44 (2.65)	30.3 (1.69)
V&W			0.46 (0.27)	0.39 (0.28)	0.67 (0.11)	0.63 (0.12)	0.68 (0.09)	0.64 (0.11)	29.44 (2.65)	30.3 (1.69)	
LT		V	0.33 (0.21)	0.32 (0.25)	0.59 (0.11)	0.55 (0.14)	0.6 (0.09)	0.56 (0.13)	29.68 (2.09)	30.82 (1.53)	
		V&W	0.33 (0.21)	0.32 (0.25)	0.59 (0.11)	0.55 (0.14)	0.6 (0.09)	0.56 (0.13)	29.68 (2.09)	30.82 (1.53)	
MK		V	0.40 (0.22)	0.40 (0.29)	0.63 (0.08)	0.61 (0.12)	0.63 (0.07)	0.61 (0.12)	27.3 (2.22)	27.86 (1.64)	
		V&W	0.42 (0.23)	0.42 (0.3)	0.65 (0.09)	0.63 (0.12)	0.65 (0.07)	0.63 (0.11)	27.3 (2.22)	27.86 (1.64)	
Tb		BD	V	0.56 (0.26)	0.72 (0.24)	0.70 (0.11)	0.78 (0.1)	0.70 (0.1)	0.78 (0.1)	28.04 (3.23)	29.79 (2.1)
			V&W	0.59 (0.27)	0.73 (0.24)	0.72 (0.12)	0.78 (0.1)	0.72 (0.1)	0.78 (0.09)	28.04 (3.23)	29.79 (2.1)
	LT	V	0.45 (0.25)	0.72 (0.24)	0.64 (0.12)	0.77 (0.12)	0.64 (0.11)	0.77 (0.12)	28.6 (2.77)	30.11 (2.18)	
		V&W	0.45 (0.25)	0.72 (0.24)	0.64 (0.12)	0.77 (0.12)	0.64 (0.11)	0.77 (0.12)	28.6 (2.77)	30.11 (2.18)	
	MK	V	0.5 (0.22)	0.73 (0.24)	0.67 (0.08)	0.78 (0.1)	0.67 (0.07)	0.78 (0.1)	26.34 (2.5)	26.96 (1.85)	

LC	Town	Cooling features	Cooling distance						LST	
			100m		200m		300m			
		Sp. res.	2m	30m	2m	30m	2m	30m	2m	30m
		V&W	0.53 (0.23)	0.73 (0.23)	0.69 (0.09)	0.78 (0.1)	0.69 (0.07)	0.78 (0.09)	26.34 (2.5)	26.96 (1.85)
Tc	BD	V	0.7 (0.21)	0.79 (0.13)	0.75 (0.1)	0.81 (0.06)	0.74 (0.08)	0.81 (0.06)	26.08 (2.84)	28.26 (2.11)
		V&W	0.75 (0.21)	0.8 (0.13)	0.78 (0.09)	0.81 (0.06)	0.77 (0.07)	0.81 (0.06)	26.08 (2.84)	28.26 (2.11)
		V	0.52 (0.21)	0.74 (0.21)	0.67 (0.08)	0.78 (0.1)	0.67 (0.07)	0.78 (0.1)	26.47 (2.3)	26.86 (1.79)
	MK	V&W	0.54 (0.21)	0.75 (0.21)	0.68 (0.08)	0.78 (0.1)	0.69 (0.07)	0.78 (0.09)	26.47 (2.3)	26.86 (1.79)
		V	0.41 (0.26)	0.29 (0.25)	0.63 (0.14)	0.56 (0.13)	0.65 (0.09)	0.56 (0.11)	24.48 (2.28)	24.89 (2.07)
		V&W	0.82 (0.18)	0.65 (0.26)	0.79 (0.1)	0.67 (0.14)	0.76 (0.09)	0.65 (0.13)	24.48 (2.28)	24.89 (2.07)
	BD	V	0.57 (0.23)	0.51 (0.28)	0.65 (0.1)	0.6 (0.13)	0.63 (0.08)	0.58 (0.12)	27.67 (2.54)	26.8 (2.91)
		V&W	0.57 (0.23)	0.56 (0.28)	0.65 (0.1)	0.61 (0.13)	0.63 (0.08)	0.59 (0.12)	27.67 (2.54)	26.8 (2.91)
		V	0.31 (0.22)	0.25 (0.22)	0.52 (0.17)	0.49 (0.16)	0.58 (0.09)	0.54 (0.09)	22.83 (2.58)	22.74 (2.01)
W	MK	V&W	0.79 (0.17)	0.79 (0.19)	0.76 (0.08)	0.75 (0.09)	0.73 (0.06)	0.71 (0.08)	22.83 (2.58)	22.74 (2.01)

Table 3 OLS regression statistics between heat mitigation index and land surface temperature at 2m and 30m spatial resolution across Bedford (BD), Luton (LT) and Milton Keynes (MK).

Town	Cooling distance	Cooling features	Sp. Res	Rsqr	Adj. Rsqr	SE	Intercept a	b	SE a	SE b	t value a	t value b	Prob t a	Prob t b	f statistic
BD	100m	V	2m	0.24	0.24	1.75	31.45	-2.87	0.00	0.00	32261	-1450	0.00	0.00	2102379
			30m	0.48	0.48	2.29	32.28	-7.29	0.02	0.03	1652	-228	0.00	0.00	51856
		W&V	2m	0.28	0.28	1.71	31.56	-3.08	0.00	0.00	32931	-1621	0.00	0.00	2628327
			30m	0.63	0.63	1.94	32.97	-8.05	0.02	0.03	1943	-306	0.00	0.00	93892
	200m	V	2m	0.16	0.16	1.84	33.81	-5.48	0.00	0.00	11033	-1134	0.00	0.00	1286748
			30m	0.44	0.44	2.37	38.61	-14.86	0.05	0.07	778	-210	0.00	0.00	43954
		W&V	2m	0.18	0.18	1.81	34.21	-5.99	0.00	0.00	10895	-1235	0.00	0.00	1526390
			30m	0.59	0.59	2.03	40.59	-17.11	0.04	0.06	925	-283	0.00	0.00	80073
	300m	V	2m	0.12	0.12	1.88	33.88	-5.47	0.00	0.01	9410	-979	0.00	0.00	957845
			30m	0.46	0.46	2.34	41.54	-19.11	0.06	0.09	677	-217	0.00	0.00	46941
		W&V	2m	0.14	0.14	1.86	34.39	-6.13	0.00	0.01	9043	-1062	0.00	0.00	1126840
			30m	0.58	0.58	2.05	43.86	-21.71	0.06	0.08	783	-279	0.00	0.00	77795
LT	100m	V	2m	0.24	0.24	1.59	31.70	-2.81	0.00	0.00	53360	-2031	0.00	0.00	4124672
			30m	0.64	0.64	1.84	32.19	-7.86	0.01	0.02	2890	-388	0.00	0.00	150887
		W&V	2m	0.25	0.25	1.58	31.70	-2.83	0.00	0.00	53478	-2053	0.00	0.00	4215599
			30m	0.64	0.64	1.83	32.20	-7.85	0.01	0.02	2904	-391	0.00	0.00	152986
	200m	V	2m	0.19	0.19	1.64	33.42	-4.60	0.00	0.00	21959	-1740	0.00	0.00	3027020
			30m	0.63	0.63	1.87	37.87	-14.66	0.03	0.04	1501	-379	0.00	0.00	143534
		W&V	2m	0.19	0.19	1.64	33.44	-4.63	0.00	0.00	21951	-1754	0.00	0.00	3077919
			30m	0.63	0.63	1.87	37.87	-14.63	0.03	0.04	1502	-379	0.00	0.00	143805
	300m	V	2m	0.14	0.14	1.70	33.47	-4.54	0.00	0.00	17823	-1416	0.00	0.00	2004458
			30m	0.63	0.63	1.85	40.67	-19.06	0.03	0.05	1272	-384	0.00	0.00	147763
		W&V	2m	0.14	0.14	1.70	33.50	-4.58	0.00	0.00	17775	-1428	0.00	0.00	2040157
			30m	0.63	0.63	1.85	40.69	-19.06	0.03	0.05	1273	-385	0.00	0.00	148322
MK	100m	V	2m	0.31	0.31	1.57	29.05	-3.04	0.00	0.00	55879	-3089	0.00	0.00	9544094
			30m	0.30	0.30	2.33	29.25	-5.65	0.01	0.02	2259	-233	0.00	0.00	54064
		W&V	2m	0.33	0.33	1.54	29.12	-3.09	0.00	0.00	56226	-3248	0.00	0.00	10551109
			30m	0.48	0.48	2.01	30.02	-6.80	0.01	0.02	2650	-343	0.00	0.00	117488
	200m	V	2m	0.22	0.22	1.67	31.60	-6.06	0.00	0.00	19956	-2445	0.00	0.00	5975877
			30m	0.22	0.22	2.44	34.09	-11.53	0.04	0.06	871	-193	0.00	0.00	37298
		W&V	2m	0.24	0.24	1.64	31.93	-6.42	0.00	0.00	19713	-2593	0.00	0.00	6724289
			30m	0.44	0.44	2.07	37.18	-15.69	0.03	0.05	1111	-320	0.00	0.00	102082
	300m	V	2m	0.18	0.18	1.71	31.79	-6.28	0.00	0.00	17036	-2162	0.00	0.00	4672386
			30m	0.26	0.26	2.39	37.56	-16.83	0.05	0.08	723	-212	0.00	0.00	44803
		W&V	2m	0.20	0.20	1.69	32.21	-6.76	0.00	0.00	16534	-2286	0.00	0.00	5225048
			30m	0.45	0.45	2.06	40.68	-20.85	0.04	0.06	929	-323	0.00	0.00	104460

Table 4 OLS regression statistics between heat mitigation index and land surface temperature at 2m and 30m spatial resolution for individual LC classes in Bedford

LC	Cooling distance	Cooling features	Sp. Res	Rsq	Adj. Rsq	SE	Intercept a	b	SE a	SE b	t value a	t value b	Prob t a	Prob t b	f statistic
B	100m	V	2m	0.12	0.12	1.07	32.06	-1.91	0.00	0.00	26475	-389	0.00	0.00	151219
			30m	0.48	0.48	1.39	33.24	-7.58	0.04	0.12	874	-64	0.00	0.00	4144
		W&V	2m	0.14	0.14	1.06	32.08	-1.93	0.00	0.00	26606	-411	0.00	0.00	168792
			30m	0.52	0.52	1.34	33.29	-7.59	0.04	0.11	912	-69	0.00	0.00	4767
	200m	V	2m	0.19	0.19	1.03	33.88	-3.87	0.00	0.01	7896	-495	0.00	0.00	244906
			30m	0.50	0.50	1.37	37.53	-10.94	0.10	0.16	386	-67	0.00	0.00	4443
		W&V	2m	0.18	0.18	1.04	33.92	-3.82	0.00	0.01	7605	-483	0.00	0.00	233084
			30m	0.50	0.50	1.37	37.74	-11.05	0.10	0.17	377	-67	0.00	0.00	4466
	300m	V	2m	0.15	0.15	1.06	34.31	-4.44	0.01	0.01	5914	-436	0.00	0.00	189733
			30m	0.52	0.52	1.35	40.08	-14.71	0.13	0.21	307	-69	0.00	0.00	4736
		W&V	2m	0.14	0.14	1.06	34.31	-4.29	0.01	0.01	5616	-413	0.00	0.00	170585
			30m	0.50	0.50	1.37	40.32	-14.73	0.14	0.22	290	-66	0.00	0.00	4413
G	100m	V	2m	0.26	0.26	1.67	31.10	-3.61	0.00	0.00	12041	-754	0.00	0.00	567788
			30m	0.40	0.40	2.25	32.46	-7.34	0.04	0.06	727	-123	0.00	0.00	15151
		W&V	2m	0.29	0.29	1.64	31.23	-3.75	0.00	0.00	12122	-808	0.00	0.00	653223
			30m	0.49	0.49	2.08	33.23	-8.09	0.04	0.06	776	-147	0.00	0.00	21532
	200m	V	2m	0.11	0.11	1.83	33.07	-5.90	0.01	0.01	3970	-444	0.00	0.00	197356
			30m	0.40	0.40	2.26	38.56	-15.05	0.09	0.12	413	-122	0.00	0.00	14989
		W&V	2m	0.14	0.14	1.80	33.65	-6.67	0.01	0.01	4024	-513	0.00	0.00	262964
			30m	0.50	0.50	2.06	40.54	-17.13	0.09	0.11	453	-150	0.00	0.00	22480
	300m	V	2m	0.06	0.06	1.88	32.51	-4.98	0.01	0.02	3378	-325	0.00	0.00	105521
			30m	0.38	0.38	2.29	39.93	-17.28	0.11	0.15	368	-118	0.00	0.00	13880
		W&V	2m	0.09	0.09	1.86	33.25	-5.99	0.01	0.02	3368	-392	0.00	0.00	153684
			30m	0.48	0.48	2.11	42.43	-20.03	0.11	0.14	397	-143	0.00	0.00	20421
P	100m	V	2m	0.15	0.15	1.27	31.49	-2.32	0.00	0.00	30906	-606	0.00	0.00	366664
			30m	0.36	0.36	1.81	32.08	-6.16	0.03	0.08	1121	-80	0.00	0.00	6430
		W&V	2m	0.17	0.17	1.26	31.52	-2.36	0.00	0.00	31138	-653	0.00	0.00	426111
			30m	0.44	0.44	1.71	32.25	-6.42	0.03	0.07	1201	-94	0.00	0.00	8746
	200m	V	2m	0.18	0.18	1.25	33.90	-4.92	0.00	0.01	8313	-680	0.00	0.00	462553
			30m	0.33	0.33	1.86	35.88	-9.47	0.08	0.13	462	-75	0.00	0.00	5565
		W&V	2m	0.19	0.19	1.25	33.96	-4.88	0.00	0.01	8200	-684	0.00	0.00	467654
			30m	0.40	0.40	1.76	36.64	-10.40	0.08	0.12	487	-87	0.00	0.00	7591
	300m	V	2m	0.16	0.16	1.27	34.35	-5.50	0.01	0.01	6572	-614	0.00	0.00	376892
			30m	0.40	0.40	1.76	39.12	-14.28	0.10	0.16	378	-87	0.00	0.00	7546
		W&V	2m	0.15	0.15	1.27	34.40	-5.40	0.01	0.01	6414	-607	0.00	0.00	369008
			30m	0.48	0.48	1.64	40.29	-15.64	0.10	0.15	402	-102	0.00	0.00	10307
SGH	100m	V	2m	0.12	0.12	1.59	31.11	-2.16	0.00	0.01	8719	-282	0.00	0.00	79595
			30m	0.57	0.57	1.74	32.92	-7.99	0.06	0.12	536	-66	0.00	0.00	4347
		W&V	2m	0.14	0.14	1.57	31.18	-2.28	0.00	0.01	8732	-305	0.00	0.00	92827
			30m	0.68	0.68	1.50	33.19	-8.19	0.05	0.10	633	-84	0.00	0.00	6989
	200m	V	2m	0.09	0.09	1.62	32.74	-3.99	0.01	0.02	3065	-234	0.00	0.00	54721
			30m	0.50	0.50	1.87	40.90	-17.54	0.20	0.31	202	-57	0.00	0.00	3306
		W&V	2m	0.11	0.11	1.60	33.06	-4.42	0.01	0.02	3027	-258	0.00	0.00	66776

LC	Cooling distance	Cooling features	Sp. Res	Rsq	Adj. Rsq	SE	Intercept a	b	SE a	SE b	t value a	t value b	Prob t a	Prob t b	f statistic
	300m	V	30m	0.64	0.63	1.61	41.97	-18.62	0.17	0.25	248	-75	0.00	0.00	5657
			2m	0.07	0.07	1.63	32.73	-3.90	0.01	0.02	2749	-208	0.00	0.00	43235
		W&V	30m	0.50	0.50	1.89	43.11	-20.75	0.24	0.37	176	-57	0.00	0.00	3198
			2m	0.09	0.09	1.62	33.16	-4.47	0.01	0.02	2657	-233	0.00	0.00	54117
			30m	0.60	0.60	1.69	44.18	-21.71	0.21	0.31	206	-70	0.00	0.00	4835
Tb	100m	V	2m	0.05	0.05	2.04	31.20	-1.97	0.01	0.01	5835	-280	0.00	0.00	78191
			30m	0.60	0.60	2.04	33.36	-9.49	0.05	0.08	675	-120	0.00	0.00	14352
		W&V	2m	0.06	0.06	2.04	31.27	-2.04	0.01	0.01	5788	-289	0.00	0.00	83520
			30m	0.70	0.70	1.75	33.87	-9.88	0.04	0.07	791	-151	0.00	0.00	22832
	200m	V	2m	0.04	0.04	2.05	33.08	-4.25	0.01	0.02	2553	-257	0.00	0.00	65869
			30m	0.54	0.54	2.18	42.69	-20.88	0.14	0.20	305	-106	0.00	0.00	11307
		W&V	2m	0.05	0.05	2.05	33.31	-4.50	0.01	0.02	2476	-264	0.00	0.00	69602
			30m	0.66	0.66	1.87	44.40	-22.67	0.12	0.16	368	-138	0.00	0.00	18974
	300m	V	2m	0.04	0.04	2.06	33.08	-4.22	0.01	0.02	2407	-242	0.00	0.00	58411
			30m	0.53	0.53	2.21	45.08	-24.35	0.17	0.23	271	-104	0.00	0.00	10746
		W&V	2m	0.04	0.04	2.05	33.42	-4.63	0.01	0.02	2275	-249	0.00	0.00	61990
			30m	0.62	0.62	1.98	46.94	-26.32	0.15	0.21	310	-126	0.00	0.00	15913
Tc	100m	V	2m	0.02	0.02	2.09	30.17	-2.41	0.09	0.12	324	-21	0.00	0.00	435
			30m	0.36	0.35	2.27	31.91	-8.32	0.57	0.78	56	-11	0.00	0.00	113
		W&V	2m	0.03	0.03	2.08	30.55	-2.86	0.10	0.12	317	-24	0.00	0.00	580
			30m	0.51	0.51	1.97	33.46	-9.88	0.52	0.67	64	-15	0.00	0.00	217
	200m	V	2m	0.02	0.02	2.09	31.96	-4.59	0.19	0.24	166	-19	0.00	0.00	370
			30m	0.38	0.38	2.23	39.73	-18.26	1.23	1.63	32	-11	0.00	0.00	126
		W&V	2m	0.02	0.02	2.09	32.54	-5.28	0.21	0.25	158	-21	0.00	0.00	432
			30m	0.59	0.59	1.82	45.06	-24.32	1.12	1.42	40	-17	0.00	0.00	293
	300m	V	2m	0.02	0.02	2.09	31.70	-4.25	0.20	0.25	159	-17	0.00	0.00	301
			30m	0.38	0.37	2.23	42.22	-21.92	1.46	1.96	29	-11	0.00	0.00	124
		W&V	2m	0.02	0.02	2.09	32.38	-5.08	0.22	0.27	149	-19	0.00	0.00	360
			30m	0.55	0.55	1.90	48.22	-28.88	1.41	1.82	34	-16	0.00	0.00	251
W	100m	V	2m	0.07	0.07	1.99	25.53	-2.21	0.01	0.03	2067	-68	0.00	0.00	4596
			30m	0.03	0.03	2.24	23.84	1.50	0.11	0.22	224	7	0.00	0.00	47
		W&V	2m	0.07	0.07	1.99	26.24	-2.06	0.02	0.03	1217	-67	0.00	0.00	4491
			30m	0.48	0.48	1.63	31.69	-8.81	0.19	0.23	166	-39	0.00	0.00	1499
	200m	V	2m	0.17	0.17	1.89	28.61	-6.67	0.03	0.06	832	-111	0.00	0.00	12282
			30m	0.02	0.02	2.25	23.03	2.29	0.26	0.40	90	6	0.00	0.00	33
		W&V	2m	0.06	0.06	2.01	27.24	-3.49	0.04	0.06	684	-60	0.00	0.00	3610
			30m	0.47	0.47	1.65	36.48	-15.14	0.32	0.40	114	-38	0.00	0.00	1422
	300m	V	2m	0.11	0.11	1.94	28.35	-6.15	0.04	0.07	720	-90	0.00	0.00	8024
			30m	0.00	0.00	2.27	25.05	-0.91	0.40	0.61	63	-1	0.00	0.14	2
		W&V	2m	0.05	0.05	2.02	27.16	-3.49	0.04	0.06	645	-55	0.00	0.00	3011
			30m	0.40	0.40	1.75	37.25	-16.78	0.39	0.51	95	-33	0.00	0.00	1084

Table 5 OLS regression statistics between heat mitigation index and land surface temperature at 2m and 30m spatial resolution for individual LC classes in Luton

LC	Cooling distance	Cooling features	Sp. Res	Rsq	Adj. Rsq	SE	Intercept a	b	SE a	SE b	t value a	t value b	Prob t a	Prob t b	f statistic
B	100m	V	2m	0.08	0.08	1.14	32.04	-2.32	0.00	0.01	34986	-412	0.00	0.00	169706
			30m	0.32	0.32	1.82	33.26	-10.53	0.04	0.16	881	-66	0.00	0.00	4344
		W&V	2m	0.08	0.08	1.14	32.04	-2.33	0.00	0.01	35031	-417	0.00	0.00	174085
			30m	0.32	0.32	1.82	33.26	-10.48	0.04	0.16	883	-66	0.00	0.00	4344
	200m	V	2m	0.34	0.34	0.96	33.99	-4.70	0.00	0.00	15528	-1024	0.00	0.00	1048442
			30m	0.42	0.42	1.68	36.05	-9.89	0.06	0.12	576	-82	0.00	0.00	6767
		W&V	2m	0.34	0.34	0.96	33.99	-4.70	0.00	0.00	15506	-1024	0.00	0.00	1049101
			30m	0.42	0.42	1.68	36.06	-9.88	0.06	0.12	575	-82	0.00	0.00	6755
	300m	V	2m	0.22	0.22	1.04	34.48	-5.35	0.00	0.01	9897	-771	0.00	0.00	594931
			30m	0.35	0.35	1.79	37.97	-12.85	0.10	0.18	381	-70	0.00	0.00	4918
		W&V	2m	0.23	0.23	1.04	34.50	-5.39	0.00	0.01	9851	-774	0.00	0.00	598881
			30m	0.35	0.35	1.78	38.02	-12.91	0.10	0.18	380	-70	0.00	0.00	4939
G	100m	V	2m	0.32	0.32	1.66	31.67	-4.46	0.00	0.00	16670	-1120	0.00	0.00	1254211
			30m	0.59	0.59	1.84	32.20	-7.54	0.03	0.04	1159	-180	0.00	0.00	32393
		W&V	2m	0.32	0.32	1.65	31.69	-4.49	0.00	0.00	16776	-1139	0.00	0.00	1298204
			30m	0.59	0.59	1.84	32.21	-7.54	0.03	0.04	1157	-180	0.00	0.00	32385
	200m	V	2m	0.09	0.09	1.92	32.74	-5.19	0.01	0.01	5692	-510	0.00	0.00	259892
			30m	0.58	0.58	1.85	38.36	-15.59	0.06	0.09	625	-177	0.00	0.00	31416
		W&V	2m	0.09	0.09	1.91	32.83	-5.33	0.01	0.01	5729	-528	0.00	0.00	278525
			30m	0.58	0.58	1.85	38.40	-15.63	0.06	0.09	624	-177	0.00	0.00	31505
	300m	V	2m	0.03	0.03	1.98	31.64	-3.21	0.01	0.01	4793	-274	0.00	0.00	74937
			30m	0.54	0.54	1.94	39.95	-18.37	0.08	0.11	525	-163	0.00	0.00	26642
		W&V	2m	0.03	0.03	1.98	31.74	-3.37	0.01	0.01	4799	-288	0.00	0.00	82925
			30m	0.54	0.54	1.94	40.02	-18.44	0.08	0.11	524	-163	0.00	0.00	26723
P	100m	V	2m	0.13	0.13	1.17	31.69	-2.47	0.00	0.00	53122	-818	0.00	0.00	669911
			30m	0.29	0.29	1.79	31.93	-7.27	0.02	0.07	1518	-97	0.00	0.00	9423
		W&V	2m	0.13	0.13	1.16	31.70	-2.49	0.00	0.00	53241	-835	0.00	0.00	696582
			30m	0.29	0.29	1.79	31.93	-7.24	0.02	0.07	1522	-97	0.00	0.00	9463
	200m	V	2m	0.25	0.25	1.08	33.57	-4.35	0.00	0.00	19140	-1239	0.00	0.00	1534545
			30m	0.36	0.36	1.70	35.15	-9.19	0.04	0.08	788	-113	0.00	0.00	12876
		W&V	2m	0.25	0.25	1.08	33.58	-4.37	0.00	0.00	19150	-1245	0.00	0.00	1550847
			30m	0.36	0.36	1.70	35.16	-9.18	0.04	0.08	788	-114	0.00	0.00	12909
	300m	V	2m	0.19	0.19	1.12	34.06	-5.08	0.00	0.00	13478	-1042	0.00	0.00	1085690
			30m	0.42	0.42	1.63	37.71	-13.34	0.06	0.10	633	-127	0.00	0.00	16217
		W&V	2m	0.19	0.19	1.12	34.09	-5.11	0.00	0.00	13467	-1050	0.00	0.00	1102326
			30m	0.42	0.42	1.63	37.74	-13.37	0.06	0.10	633	-128	0.00	0.00	16297
SGH	100m	V	2m	0.12	0.12	1.44	31.48	-2.09	0.00	0.01	13349	-359	0.00	0.00	129224
			30m	0.64	0.64	1.26	32.31	-7.89	0.03	0.09	960	-92	0.00	0.00	8539
		W&V	2m	0.12	0.12	1.44	31.49	-2.11	0.00	0.01	13371	-365	0.00	0.00	133014
			30m	0.64	0.64	1.26	32.30	-7.86	0.03	0.09	960	-92	0.00	0.00	8522
	200m	V	2m	0.08	0.08	1.47	32.52	-3.12	0.01	0.01	5355	-290	0.00	0.00	84011
			30m	0.61	0.61	1.30	38.64	-15.27	0.10	0.17	373	-88	0.00	0.00	7720
		W&V	2m	0.08	0.08	1.47	32.55	-3.16	0.01	0.01	5350	-293	0.00	0.00	86117

LC	Cooling distance	Cooling features	Sp. Res	Rsq	Adj. Rsq	SE	Intercept a	b	SE a	SE b	t value a	t value b	Prob t a	Prob t b	f statistic
Tb	300m	V	30m	0.61	0.61	1.30	38.65	-15.27	0.10	0.17	373	-88	0.00	0.00	7734
			2m	0.05	0.05	1.50	32.27	-2.61	0.01	0.01	4815	-223	0.00	0.00	49790
		W&V	30m	0.57	0.57	1.37	40.06	-17.46	0.13	0.22	308	-81	0.00	0.00	6505
			2m	0.05	0.05	1.50	32.30	-2.65	0.01	0.01	4799	-226	0.00	0.00	51156
			30m	0.57	0.57	1.37	40.09	-17.49	0.13	0.22	308	-81	0.00	0.00	6525
	100m	V	2m	0.04	0.04	2.14	31.35	-1.72	0.00	0.01	7118	-297	0.00	0.00	88305
			30m	0.72	0.72	1.46	32.81	-9.30	0.03	0.05	1238	-182	0.00	0.00	33205
		W&V	2m	0.04	0.04	2.14	31.37	-1.74	0.00	0.01	7116	-300	0.00	0.00	90238
			30m	0.73	0.73	1.45	32.81	-9.27	0.03	0.05	1239	-182	0.00	0.00	33255
	200m	V	2m	0.03	0.03	2.15	32.51	-3.10	0.01	0.01	3653	-272	0.00	0.00	74166
			30m	0.71	0.71	1.50	40.83	-19.21	0.07	0.11	573	-175	0.00	0.00	30580
		W&V	2m	0.03	0.03	2.15	32.53	-3.12	0.01	0.01	3642	-274	0.00	0.00	74842
			30m	0.71	0.71	1.50	40.86	-19.22	0.07	0.11	573	-175	0.00	0.00	30637
	300m	V	2m	0.03	0.03	2.15	32.45	-3.02	0.01	0.01	3458	-252	0.00	0.00	63457
			30m	0.69	0.69	1.55	42.58	-21.88	0.08	0.13	502	-167	0.00	0.00	27952
		W&V	2m	0.03	0.03	2.15	32.47	-3.04	0.01	0.01	3444	-253	0.00	0.00	63950
			30m	0.69	0.69	1.54	42.64	-21.94	0.08	0.13	502	-168	0.00	0.00	28077
Tc	100m	V	2m												
			30m												
		W&V	2m												
			30m												
	200m	V	2m												
			30m												
		W&V	2m												
			30m												
	300m	V	2m												
			30m												
		W&V	2m												
			30m												
W	100m	V	2m	0.15	0.15	2.68	28.82	-4.00	0.05	0.08	627	-50	0.00	0.00	2542
			30m	0.49	0.49	1.82	32.03	-8.32	0.53	0.94	60	-9	0.00	0.00	78
		W&V	2m	0.25	0.25	2.52	29.70	-5.22	0.05	0.08	634	-69	0.00	0.00	4806
			30m	0.56	0.55	1.71	32.42	-8.38	0.51	0.84	64	-10	0.00	0.00	100
	200m	V	2m	0.04	0.04	2.86	29.36	-4.26	0.11	0.18	259	-23	0.00	0.00	535
			30m	0.61	0.61	1.59	40.91	-20.66	1.19	1.83	34	-11	0.00	0.00	127
		W&V	2m	0.05	0.05	2.83	30.00	-5.22	0.11	0.18	261	-28	0.00	0.00	810
			30m	0.64	0.63	1.54	41.12	-20.69	1.15	1.75	36	-12	0.00	0.00	140
	300m	V	2m	0.00	0.00	2.91	27.04	-0.41	0.12	0.20	228	-2	0.00	0.04	4
			30m	0.60	0.59	1.63	44.01	-26.08	1.52	2.40	29	-11	0.00	0.00	118
		W&V	2m	0.00	0.00	2.91	27.39	-1.00	0.12	0.20	225	-5	0.00	0.00	24
			30m	0.62	0.61	1.58	44.40	-26.46	1.48	2.33	30	-11	0.00	0.00	129

Table 6 OLS regression statistics between heat mitigation index and land surface temperature at 2m and 30m spatial resolution for individual LC classes in Milton Keynes.

LC	Cooling distance	Cooling features	Sp. Res	Rsq	Adj. Rsq	SE	Intercept a	b	SE a	SE b	t value a	t value b	Prob t a	Prob t b	f statistic
B	100m	V	2m	0.08	0.08	1.03	29.70	-1.65	0.00	0.00	38155	-443	0.00	0.00	195954
			30m	0.28	0.28	1.92	30.89	-8.48	0.04	0.13	862	-64	0.00	0.00	4100
		W&V	2m	0.09	0.09	1.02	29.72	-1.71	0.00	0.00	38472	-490	0.00	0.00	239828
			30m	0.29	0.29	1.90	30.86	-8.18	0.03	0.12	889	-66	0.00	0.00	4331
	200m	V	2m	0.17	0.17	0.98	31.49	-3.77	0.00	0.01	10931	-701	0.00	0.00	491411
			30m	0.27	0.27	1.92	34.66	-10.18	0.09	0.16	377	-64	0.00	0.00	4052
		W&V	2m	0.16	0.16	0.98	31.40	-3.50	0.00	0.01	10946	-672	0.00	0.00	452023
			30m	0.27	0.27	1.92	34.58	-9.81	0.09	0.16	378	-63	0.00	0.00	3983
	300m	V	2m	0.14	0.14	1.00	32.10	-4.71	0.00	0.01	7505	-610	0.00	0.00	372047
			30m	0.26	0.26	1.94	37.21	-14.12	0.14	0.23	270	-61	0.00	0.00	3676
		W&V	2m	0.12	0.12	1.01	31.85	-4.10	0.00	0.01	7565	-559	0.00	0.00	312291
			30m	0.24	0.24	1.97	36.73	-12.94	0.14	0.22	269	-58	0.00	0.00	3325
G	100m	V	2m	0.24	0.24	1.60	28.66	-3.26	0.00	0.00	20027	-1304	0.00	0.00	1700712
			30m	0.35	0.35	1.84	29.53	-5.62	0.03	0.04	1108	-132	0.00	0.00	17540
		W&V	2m	0.27	0.27	1.56	28.81	-3.37	0.00	0.00	20149	-1418	0.00	0.00	2012127
			30m	0.43	0.43	1.73	29.93	-6.08	0.03	0.04	1173	-155	0.00	0.00	24045
	200m	V	2m	0.14	0.14	1.69	31.13	-6.70	0.00	0.01	7067	-946	0.00	0.00	894403
			30m	0.32	0.32	1.88	35.87	-14.28	0.08	0.12	456	-123	0.00	0.00	15147
		W&V	2m	0.17	0.17	1.66	31.51	-7.03	0.00	0.01	7408	-1071	0.00	0.00	1146189
			30m	0.41	0.41	1.75	37.26	-15.87	0.07	0.10	508	-151	0.00	0.00	22890
	300m	V	2m	0.09	0.09	1.74	30.91	-6.41	0.01	0.01	5911	-752	0.00	0.00	564823
			30m	0.29	0.29	1.92	37.75	-17.35	0.10	0.15	377	-115	0.00	0.00	13321
		W&V	2m	0.12	0.12	1.72	31.34	-6.81	0.01	0.01	6169	-859	0.00	0.00	738367
			30m	0.37	0.37	1.81	39.09	-18.77	0.09	0.14	418	-138	0.00	0.00	19047
P	100m	V	2m	0.17	0.17	1.37	28.96	-2.33	0.00	0.00	46316	-1170	0.00	0.00	1369686
			30m	0.27	0.27	1.89	29.54	-5.78	0.02	0.05	1558	-109	0.00	0.00	11884
		W&V	2m	0.19	0.19	1.35	29.00	-2.35	0.00	0.00	46613	-1260	0.00	0.00	1586887
			30m	0.31	0.31	1.84	29.62	-5.85	0.02	0.05	1625	-119	0.00	0.00	14267
	200m	V	2m	0.16	0.16	1.37	31.22	-4.84	0.00	0.00	12878	-1121	0.00	0.00	1256639
			30m	0.24	0.24	1.93	33.40	-9.43	0.06	0.09	590	-100	0.00	0.00	10086
		W&V	2m	0.17	0.17	1.37	31.32	-4.86	0.00	0.00	12961	-1166	0.00	0.00	1358965
			30m	0.28	0.28	1.87	33.90	-10.01	0.06	0.09	614	-112	0.00	0.00	12568
	300m	V	2m	0.13	0.13	1.40	31.82	-5.74	0.00	0.01	9690	-1003	0.00	0.00	1006163
			30m	0.30	0.30	1.85	36.94	-14.96	0.08	0.13	468	-117	0.00	0.00	13603
		W&V	2m	0.14	0.14	1.39	31.85	-5.59	0.00	0.01	9832	-1025	0.00	0.00	1051176
			30m	0.33	0.33	1.81	37.21	-14.98	0.08	0.12	493	-125	0.00	0.00	15736
SGH	100m	V	2m	0.13	0.13	1.53	28.69	-2.07	0.00	0.00	13569	-484	0.00	0.00	233993
			30m	0.41	0.41	1.70	29.94	-6.54	0.04	0.09	714	-72	0.00	0.00	5119
		W&V	2m	0.16	0.16	1.50	28.78	-2.21	0.00	0.00	13661	-537	0.00	0.00	288347
			30m	0.47	0.47	1.62	30.08	-6.62	0.04	0.08	763	-80	0.00	0.00	6457
	200m	V	2m	0.07	0.07	1.58	30.01	-3.52	0.01	0.01	4674	-342	0.00	0.00	116691
			30m	0.40	0.40	1.72	38.30	-17.39	0.16	0.25	239	-69	0.00	0.00	4786
		W&V	2m	0.09	0.09	1.56	30.40	-4.05	0.01	0.01	4651	-396	0.00	0.00	156857

LC	Cooling distance	Cooling features	Sp. Res	Rsq	Adj. Rsq	SE	Intercept a	b	SE a	SE b	t value a	t value b	Prob t a	Prob t b	f statistic
	300m	V	30m	0.45	0.45	1.64	38.61	-17.48	0.15	0.23	263	-78	0.00	0.00	6015
			2m	0.05	0.05	1.60	29.75	-3.08	0.01	0.01	4239	-274	0.00	0.00	75161
		W&V	30m	0.37	0.37	1.76	40.19	-20.30	0.20	0.31	203	-65	0.00	0.00	4273
			2m	0.06	0.06	1.59	30.16	-3.63	0.01	0.01	4130	-320	0.00	0.00	102372
			30m	0.41	0.41	1.71	40.29	-19.92	0.18	0.28	219	-71	0.00	0.00	5039
Tb	100m	V	2m	0.08	0.08	1.77	28.58	-2.24	0.00	0.00	10635	-636	0.00	0.00	404612
			30m	0.51	0.51	1.75	30.43	-8.11	0.03	0.05	1011	-148	0.00	0.00	21988
		W&V	2m	0.09	0.09	1.76	28.72	-2.40	0.00	0.00	10526	-677	0.00	0.00	458678
			30m	0.57	0.57	1.63	30.65	-8.21	0.03	0.05	1096	-168	0.00	0.00	28333
	200m	V	2m	0.06	0.06	1.79	30.37	-4.39	0.01	0.01	4782	-542	0.00	0.00	293463
			30m	0.48	0.48	1.81	40.30	-20.85	0.10	0.15	398	-139	0.00	0.00	19288
		W&V	2m	0.07	0.07	1.78	30.80	-4.93	0.01	0.01	4577	-576	0.00	0.00	331797
			30m	0.55	0.55	1.67	41.14	-21.60	0.09	0.13	446	-162	0.00	0.00	26102
	300m	V	2m	0.05	0.05	1.80	30.31	-4.31	0.01	0.01	4561	-509	0.00	0.00	258852
			30m	0.48	0.48	1.80	42.56	-24.19	0.12	0.17	363	-139	0.00	0.00	19408
		W&V	2m	0.06	0.06	1.79	30.76	-4.87	0.01	0.01	4293	-535	0.00	0.00	285733
			30m	0.53	0.53	1.71	43.32	-24.70	0.11	0.16	394	-155	0.00	0.00	24078
Tc	100m	V	2m	0.05	0.05	1.74	28.29	-1.93	0.01	0.01	3982	-209	0.00	0.00	43674
			30m	0.51	0.50	1.62	30.61	-7.90	0.07	0.13	424	-62	0.00	0.00	3796
		W&V	2m	0.06	0.06	1.73	28.44	-2.12	0.01	0.01	3900	-225	0.00	0.00	50697
			30m	0.58	0.58	1.49	30.89	-8.13	0.07	0.11	464	-71	0.00	0.00	5085
	200m	V	2m	0.03	0.03	1.76	29.28	-3.11	0.02	0.02	1929	-161	0.00	0.00	25901
			30m	0.48	0.48	1.66	39.85	-20.04	0.23	0.34	172	-58	0.00	0.00	3389
		W&V	2m	0.04	0.04	1.75	29.65	-3.57	0.02	0.02	1821	-173	0.00	0.00	29939
			30m	0.55	0.55	1.55	40.73	-20.87	0.21	0.31	190	-67	0.00	0.00	4485
	300m	V	2m	0.03	0.03	1.76	29.14	-2.93	0.02	0.02	1865	-147	0.00	0.00	21736
			30m	0.46	0.46	1.69	41.37	-22.29	0.27	0.40	155	-56	0.00	0.00	3146
		W&V	2m	0.03	0.03	1.76	29.50	-3.37	0.02	0.02	1731	-156	0.00	0.00	24348
			30m	0.50	0.50	1.63	42.07	-22.77	0.26	0.37	163	-61	0.00	0.00	3709
W	100m	V	2m	0.05	0.05	1.96	23.24	-2.00	0.00	0.01	6055	-176	0.00	0.00	30972
			30m	0.12	0.12	2.40	21.52	4.12	0.08	0.21	266	20	0.00	0.00	385
		W&V	2m	0.04	0.04	1.97	24.39	-2.09	0.01	0.01	2212	-154	0.00	0.00	23722
			30m	0.61	0.61	1.59	32.01	-11.66	0.14	0.18	224	-66	0.00	0.00	4320
	200m	V	2m	0.09	0.09	1.92	24.48	-3.59	0.01	0.02	3150	-237	0.00	0.00	56223
			30m	0.23	0.23	2.25	19.00	7.28	0.14	0.26	135	29	0.00	0.00	815
		W&V	2m	0.00	0.00	2.00	23.83	-1.46	0.02	0.03	1127	-52	0.00	0.00	2726
			30m	0.56	0.56	1.71	41.70	-24.76	0.32	0.42	128	-58	0.00	0.00	3410
	300m	V	2m	0.02	0.02	1.98	24.70	-3.61	0.02	0.03	1504	-121	0.00	0.00	14670
			30m	0.24	0.24	2.23	15.12	13.33	0.27	0.46	57	29	0.00	0.00	857
		W&V	2m	0.00	0.00	2.01	23.10	-0.51	0.02	0.03	978	-15	0.00	0.00	236
			30m	0.39	0.39	2.01	41.37	-25.37	0.45	0.61	92	-41	0.00	0.00	1718

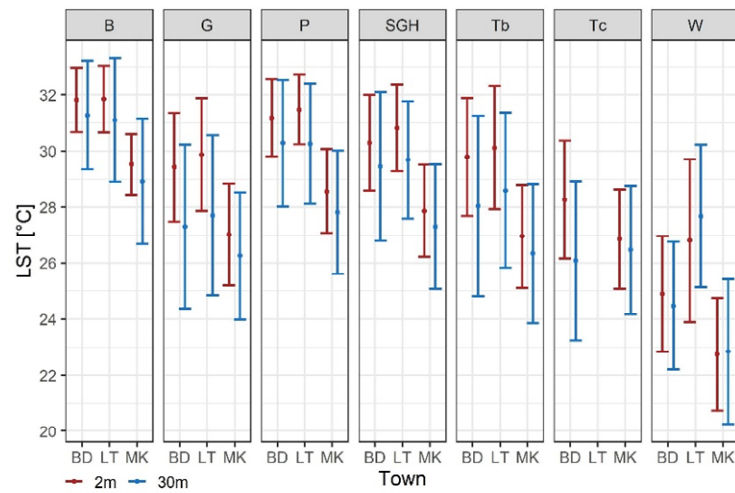


Figure 5 Means(points) and standard deviations (whiskers) of land surface temperature in each LC type across Bedford - BD, Luton - LT and Milton Keynes - MK and at two spatial resolutions: 2m and 3030 m. B – buildings, G – grass, P – paved, SGH – short trees/tall grass/hedge, Tb – broadleaf trees, Tc – coniferous trees, W – water



DSPACE

<https://dspace.org/>

Assessment of heat mitigation capacity of urban greenspaces with the use of InVEST urban cooling model, verified with day-time land surface temperature data

Zawadzka, Joanna Ewa; Harris, Jim A.; Corstanje, Ronald

2021-06-04

Elsevier

<https://doi.org/10.1016/j.landurbplan.2021.104163>

Zawadzka JE, Harris JA, Corstanje R. (2021) Assessment of heat mitigation capacity of urban greenspaces with the use of InVEST urban cooling model, verified with day-time land surface temperature data. Landscape and Urban Planning, Volume 214, October 2021, Article number 104163