



Correction: Effect of Deposit Chemistry on the Stress Corrosion Cracking Susceptibility of CMSX-10 at 550 °C and 700 °C

F. Duarte Martinez¹ · A. Syed¹ · G. Gibson² · J. Leggett² · J. C. Mason-Flucke² · J. R. Nicholls¹ · S. Gray¹

© The Author(s) 2026

Correction to: High Temperature Corrosion of Materials (2026) 103:7
<https://doi.org/10.1007/s11085-025-10366-y>

In this article the wrong figure appeared as Fig. 4 (b) specifically in the number of cracks in the sea salt salted sample at 500 h. The number of cracks that shows up on the plot at 500 h is 48, but it should be 102; the figure should have appeared as shown below. For completeness and transparency, the old incorrect and correct versions are displayed below.

The original article can be found online at <https://doi.org/10.1007/s11085-025-10366-y>.

✉ F. Duarte Martinez
Fabian.Duarte-martinez@cranfield.ac.uk

¹ Department of Surface Engineering and Precision Institute, Cranfield University, Bedford MK43 0AL, UK

² Rolls-Royce Plc, PO Box 31, Derby DE24 8BJ, UK

The plot below is the wrong plot that is shown in the original article.

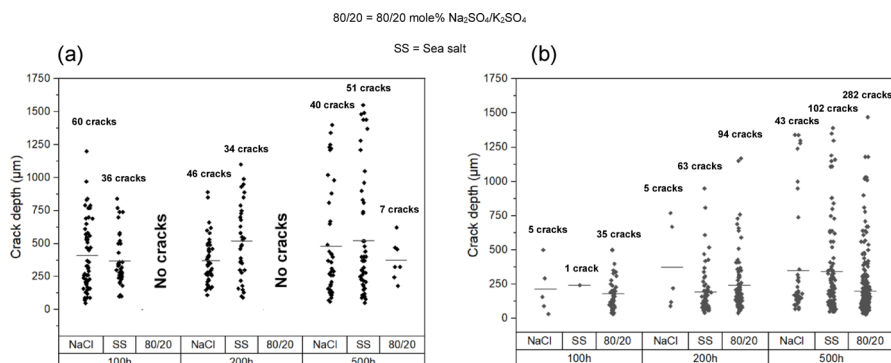


Fig. 4 Crack depth measured on C-rings with different salts and exposed at **a** 550 °C and **b** 700 °C

The plot below is the corrected plot.

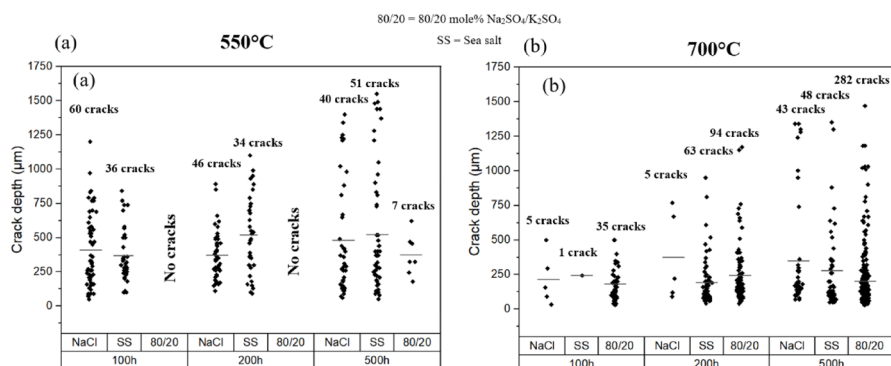


Fig. 4 Crack depth measured on C-rings with different salts and exposed at **a** 550 °C and **b** 700 °C

In addition to the above, in page 16, the sentence in the last paragraph stating “Sea salt showed a very similar behaviour to NaCl in terms of the number of stress corrosion cracks initiated” should have been “Sea salt showed a significantly higher number of cracks than NaCl only after 200 h and 500 h of exposure.”

Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article’s Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article’s Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

Publisher’s Note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.



DSPACE

<https://dspace.org/>

Effect of deposit chemistry on the stress corrosion cracking susceptibility of CMSX-10 at 550°C and 700°C

Martinez, Fabian Duarte; Syed, Adnan U.; Gibson, Grant J.; Leggett, Jonathan; Mason-Flucke, Julian C. ...

2026-02

Springer

<https://doi.org/10.1007/s11085-025-10366-y>

Martinez FD, Syed A, Gibson G, et al., (2026) Effect of deposit chemistry on the stress corrosion cracking susceptibility of CMSX-10 at 550°C and 700°C. High Temperature Corrosion of Materials, Volume 103, Issue 1, February 2026, Article number 7